



## **URBAN DEVELOPMENT DIRECTORATE (UDD)**

Government of the People's Republic of Bangladesh

# **Geological Study and Seismic Hazard Assessment Under Preparation of Development Plan for Mirsharai Upazila, Chittagong District: Risk Sensitive Landuse Plan (MUDP)**

**Package No. 2 (Two)**

## **Report on Geophysical and Geotechnical Investigations and Engineering Geological Mapping**

**May, 2018**

Submitted by



**Environmental & Geospatial Solutions (EGS)**

Suite No.-6 ,12th Floor, 218, Sahera Tropical Center, Elephant Road, Dhaka-1205, Phone: +88 01719519911  
Email: [ferdous.nasim1@gmail.com](mailto:ferdous.nasim1@gmail.com)

# Environmental & Geospatial Solutions

## EXECUTIVE SUMMARY

Urban Development Directorate (UDD) has decided to introduce suitable development plan for Mirsharai upazila. As such, UDD has initiated the project titled ‘Preparation of Development Plan for Mirsharai Upazila, Chittagong District: Risk Sensitive Landuse Plan’. Geological Study and Seismic Hazard Assessment is one of the important development module of this project. In this development plan, subsurface geological and geotechnical information’s consider as an important tool for a durable and sustainable urbanization.

In this project work, both the geophysical and geotechnical investigations have been conducted. The duration of the project is six months (19th December, 2017 to 18th June, 2018). In geotechnical survey 85 numbers of SPT boring (up to 30m) has been conducted in the field and the soil samples also collected from the field and laboratory tests are going on, which will complete with in couple of weeks. And in geophysical Survey, fifteen (15) Downhole Seismic (PS Logging), twenty (20) Multi-channel analysis of surface wave (MASW), and thirty (30) Microtremor (single array) have been investigated by using some sophisticated instruments.

However, subsurface 3D model of different layers has been developed through Geotechnical investigation, which will be updated eventually by integrating other data set. According to Standard Penetration Test’s (SPT) N-value, layer 3 and layer 5 consider as a foundation layer. Moreover, the concern foundation layer contains velocity is more than 180m/s. According to MASW and Dhowhole seismic test results S-wave velocity more than 180 m/s varies from 6.3m to 12.5m depth, which is suitable for foundation. Foundation depth should be varies from around 6m to 15m in overall Mirsharai Upazila. S-wave velocity value has been determining from MASW survey and Downhole seismic survey (PS Logging), which will correlate with N-values for developing AVs30 map. To meet the project demand thirty Single Microtremor (MT) surveys were carried out throughout the project area to derive the fundamental/peak period. This information is crucial to avoid building resonance effect during an earthquake. It is found that the peak period ranges from 0.6 to 2.5 second.

Field and laboratory investigation data will be analyzed and result will be integrated with all information’s in a module which can generate geomorphologic map, sub-surface litho-logical 3D model of different layers, engineering geological mapping based on AVS30, Seismic Hazard Map, soil type map, seismic intensity map, Peak Ground Acceleration (PGA) or Peak Ground Velocity (PGV) map, recommended building height maps for both high rise building and low rise building, liquefaction and Slope Stability Map etc. Finally, by using these geotechnical and geophysical data, risk sensitive micro-zonation maps will be prepared for risk sensitive landuse plan.

*Nasim Ferdous*

### **Nasim Ferdous**

Team Leader and Coordinator

Engineering Geology and Geotechnical Unit

Email: [ferdous.nasim1@gmail.com](mailto:ferdous.nasim1@gmail.com)

Environmental & Geospatial Solutions (EGS)

## **Abbreviations**

ASTM	: American Society for Testing and Materials
AVS30	: Average Shear Wave velocity of 30 meter depth
BH	: Borehole
MASW	: Multi-Channel Analysis of Surface Wave
N value	: Soil resistance or compactness
PGA	: Peak Ground Acceleration
PS logging	: Primary and Shear wave logging (Down-hole seismic test)
SA	: Spectral Acceleration
SPT	: Standard Penetration Tests
UDD	: Urban Development Directorate
EGL	: Existing Ground Level
GWL	: Ground Water Level

## CONTENTS

<b>1. INTRODUCTION .....</b>	<b>3</b>
1.1. Background.....	3
1.2. Location and Accessibility.....	4
1.3. Aims and Objectives .....	5
<b>2. METHODOLOGY .....</b>	<b>5</b>
<b>2.1. Strategic Methodology.....</b>	<b>5</b>
<b>2.2. Detail Procedures Of Survey/Testing .....</b>	<b>7</b>
2.2.1. Test Detail And Procedure Of Downhole Seismic Test (Ps Logging) .....	8
2.2.2. Test Detail And Procedure Of Multi-Channel Analysis Of Surface Wave (MASW) .....	14
2.2.3. Test Detail And Procedure Of Microtremor Measurement (Single Microtremor) .....	21
2.2.4. Standard Penetration Test (SPT) Method .....	22
<b>3. GEOPHYSICAL AND GEOTECHNICAL SURVEY .....</b>	<b>25</b>
3.1. GEOPHYSICAL INVESTIGATIONS .....	25
3.1.1. MASW Survey Result .....	26
3.1.2. Down-Hole Seismic (PS Logging) Test Results .....	30
3.1.3. Single Microtremor Test Results .....	34
3.2. GEOTECHNICAL INVESTIGATIONS .....	38
3.2.1. Standard Penetration Test (Spt) Log Analysis And Interpretation .....	39
<b>4. CONCLUSION .....</b>	<b>45</b>
<b>5. REFERENCES.....</b>	<b>46</b>
<b>6. APPENDICES.....</b>	<b>47</b>
<b>APPENDIX A: PHOTOGRAPHIC REPRESENTATION OF MASW SURVEY WORK .....</b>	<b>48</b>
<b>APPENDIX B: MULTI-CHANNEL ANALYSIS OF SURFACE WAVE (MASW) TEST RESULTS AND GRAPHS .....</b>	<b>55</b>
<b>APPENDIX C: PHOTOGRAPHIC REPRESENTATION OF P-S WAVE VELOCITY LOGGING SURVEY WORK.....</b>	<b>76</b>
<b>APPENDIX D: PHOTOGRAPHIC REPRESENTATION OF P-S WAVE VELOCITY TEST RESULTS AND GRAPHS .....</b>	<b>82</b>
<b>APPENDIX E: PHOTOGRAPHIC REPRESENTATION OF MICROTREMOR SURVEY WORK.....</b>	<b>97</b>
<b>APPENDIX F: SINGLE MICROTREMOR TEST RESULTS AND GRAPHS .....</b>	<b>107</b>
<b>APPENDIX G: PHOTOGRAPHIC REPRESENTATION OF GEOTECHNICAL SURVEY (BOREHOLE LOGGING) WORK .....</b>	<b>117</b>
<b>APPENDIX H: GEOTECHNICAL LOGS/ BOREHOLE LOGGING TEST RESULTS AND GRAPHS .....</b>	<b>160</b>

## LIST OF FIGURES

FIGURE 1.1 LOCATION MAP OF THE PROJECT AREA .....	4
FIGURE 2.1 FIELD DATA ACQUISITION BY PS LOGGER .....	8
FIGURE 2.2 MAIN COMPONENT OF THE FREEDOM DATA PC .....	9
FIGURE 2.3 RECEIVER ORIENTATION IN SINCO CASING .....	9
FIGURE 2.4 CALCULATION OF SHEAR WAVE VELOCITY BY DOWN HOLE SEISMIC, WHERE $R_1$ =DISTANCE BETWEEN SOURCE TO TOP GEOPHONE AND $R_2$ =DISTANCE BETWEEN SOURCE TO BOTTOM GEOPHONE .....	10
FIGURE 2.5 TO SET THE WOODEN PLANK 1.0 METERS FROM A BOREHOLE .....	10
FIGURE 2.6 TO ATTACH THE TRIGGER TO A HAMMER .....	10
FIGURE 2.7 TO CONNECT THE AIR PUMP WITH A BATTERY .....	11
FIGURE 2.8 TO CONNECT THE COMPUTER WITH CABLES WHICH ARE CONNECTED TO THE GEOPHONE .....	11
FIGURE 2.9 MAKE SURE THAT THE AIR BAG AT THE GEOPHONE WORKS. THEN, PUT THE GEOPHONE INTO THE BOREHOLE AND FIX THE SAFETY ROPE WITH THE HOLDER.....	11
FIGURE 2.10 HIT THE WOODEN PLANK IN 3 DIRECTIONS WHICH ARE ON THE LEFT, RIGHT AND VERTICAL DIRECTIONS..	12
FIGURE 2.11 TRIAXIAL GEOPHONE BEHAVIOR.....	12
FIGURE 2.12 P WAVE AND S WAVE IN THE COMPUTER WINDOW .....	12
FIGURE 2.13 ARRIVAL OF S WAVE .....	13
FIGURE 2.14 FREEDOM DATA PC WITH P-SV DOWNHOLE SOURCE AND 1 TRI-AXIAL GEOPHONE RECEIVER USED IN CROSSHOLE SEISMIC INVESTIGATIONS .....	14
FIGURE 2.15 MASW DATA PROCESSING (PARK ET AL., 1999).....	16
FIGURE 2.16 RAYLEIGH WAVE DISPERSION IN LAYER MEDIA (RIX, 1988) .....	16
FIGURE 2.17 SCHEMATIC OF LINEAR ACTIVE SOURCE SPREAD CONFIGURATION .....	17
FIGURE 2.18 MASW FIELD DATA ACQUISITION .....	17
FIGURE 2.19 DISPERSION CURVE .....	18
FIGURE 2.20 ONE DIMENSIONAL VELOCITY STRUCTURE AND 2 D VELOCITY MODEL .....	19
FIGURE 2.21 DISPERSION CURVE FOR PASSIVE MASW .....	20
FIGURE 2.22 ONE DIMENSIONAL VELOCITY STRUCTURE FOR PASSIVE MASW.....	20
FIGURE 2.23 FUNDAMENTAL OF SINGLE MICROTREMOR OBSERVATION .....	21
FIGURE 2.24 FIELD DATA ACQUISITION OF SINGLE MICROTREMOR .....	22
FIGURE 2.25 THE SPT SAMPLER IN PLACE IN THE BORING WITH HAMMER, ROPE AND CATHEAD (ADAPTED FROM KOVACS, ET AL., 1981) .....	23
FIGURE 2.26 SPT SAMPLER AND DONUT HAMMER .....	24
FIGURE 3.1 GEOPHYSICAL INVESTIGATIONS ACTIVITIES AND FIELD DATA ACQUISITION .....	26
FIGURE 3.2 LOCATION FOR MASW SURVEY .....	27
FIGURE 3.3 LOCATION FOR PS LOGGING TEST .....	31
FIGURE 3.4 LOCATION FOR SINGLE MICROTREMOR SURVEY .....	35
FIGURE 3.5 PEAK PERIODS FOR SINGLE MICROTREMOR OF MIRSHARAI UPAZILA .....	37
FIGURE 3.6 BOREHOLE LOCATION FOR SPT TEST .....	38
FIGURE 3.7 (A) LEGEND AND LITHOLOGIC CHARACTERISTIC OF SUBSURFACE OF MIRSHARAI UPAZILA; (B) SUBSURFACE 3-D MODEL SHOWING NORTHEASTERN PART; (C) SUBSURFACE 3-D MODEL IN SOUTHWESTERN DIRECTION .....	43

## 1. INTRODUCTION

### 1.1. Background

Bangladesh can earn money in local and also in foreign exchange by opening a tourist resort at Mirsharai. The spot, if properly developed will become an excellent holiday resort and tourist center. The rowing facility can be arranged easily; fishing and hunting facilities are already there. The success of developing Mirsharai as a tourist center and Special Economic Zone depends much on good communication facilities and availability of modern amenities. Moreover, the proposed Special Economic Zone would generate many industries related new activities including huge vehicular traffic such as air, rail, road and water. This phenomenon would have both positive and negative impacts on the socioeconomic condition and existing land use pattern of the region. The proposed planning package would guide such probable changes in the socio-economic condition and land use pattern of the region, and would also address the adverse impact of such changes.

Landuse planning is an important component for a modern urban development. But practicing urban development using a proper landuse plan is not developed in Bangladesh. Prior to landuse planning it is very essential to access surface and subsurface geological conditions and the relevant geological hazard and risk in and around the site of future urban development. Therefore a rigorous geological and geotechnical site characterization, including a potential risk analysis need to carry out for a risk resilient urban development.

Urban development is being increasing very fast in Bangladesh. The government has planned to develop Mirsharai as a tourist center and Special Economic Zone. However, risk sensitive urban planning is very important in such a disaster prone country like Bangladesh for a risk resilient urban development in these cities and surrounding area. In those cities Mirsharai is most disaster prone area because of this city is located near one of the most seismotectonically active zones of the earth. So this area covers the assessment and management of earthquake, landslide, and hydrometeorological hazards in pre-dominantly urban context. Considering the earthquake threat of the populated urban and rural areas of the project, UDD will have to be taken many initiatives for earthquake preparedness of the 16 (Sixteen) unions, including Ichhakhali, Wahedpur, Osmanpur, Karerhat, Katachhara, Khaiyachhara, Zorwarganj, Durgapur, Dhum, Maghadia, Mayani, Mithanala, Mirsharai, Saherkhali, Haitkandi and Hinguli Under Mirshari Upazila Development Plan (MUDP).

Slope stability assessment is very important for any development plan. While the study area is located near and/or in the hilly area, this assessment should be performed before any development plan. In this project our study area is along with hill track, slope stability assessment need to be conducted to protect slope failure and landslide. Geological, Geotechnical and DEM data should be compiled to accomplish this assessment.

Therefore the geological and geotechnical site characterization of the areas including potential seismic hazard and risk analysis is an important component for rick sensitive landuse planning of the populated urban and rural area. In here, Environmental & Geospatial Solutions (EGS) has been entrusted to conduct this project work.

## 1.2. Location and Accessibility

Mirsharai Upazila (CHITTAGONG DISTRICT) area 482.88 sqkm(BBS)/509.80sqkm, located in between 22°39' and 22°59' north latitudes and in between 91°27' and 91°39' east longitudes. It is bounded by TRIPURA state of India, CHHAGALNAIYA and FENI SADAR upazilas on the north, SITAKUNDA upazila and BAY OF BENGAL on the south, FATIKCHHARI upazila on the east, SONAGAZI and COMPANIGANJ (NOAKHALI) upazilas on the west. Mirsharai Thana was formed in 1901 and it was turned into an upazila in 1983. Mirsharai Upazila consists of 2 Municipality, 16 Union and 103 Mouza(Location of Project Area Figure1.1).

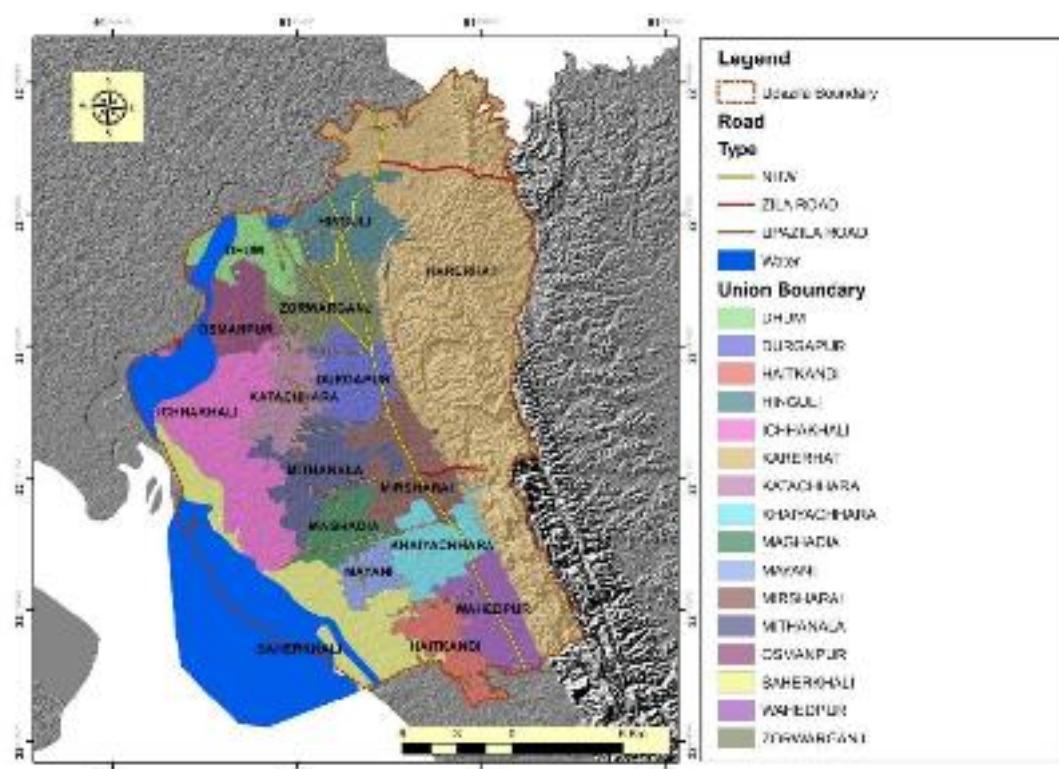


Figure 1.1 Location map of the project area

### **1.3. Aims and Objectives**

The main objective of the research is to carry out a seismic hazard analysis of the 16 (Sixteen) unions, including Ichhakhali, Wahedpur, Osmanpur, Karerhat, Katachhara, Khaiyachhara, Zorwarganj, Durgapur, Dhum, Maghadia, Mayani, Mithanala, Mirsharai, Saherkhali, Haitkandi and Hinguli Under Mirshari Upazila Development Plan (MUDP). The main objective will be achieved through accomplishment of the following sub-objectives:

- i. Geological and geomorphologic map a the study area
- ii. Sub-surface lithological 3D model development
- iii. Soil classification map using geophysical and geotechnical investigations
- iv. Engineering geological map development based on AVS30
- v. Foundation layers delineation and developing engineering properties of the sub-soil
- vi. PGA, Sa (T) Maps of 0.2 and 1.0 second periods values of 10% exceedance probability during next 50 years for local site condition.
- vii. Risk Sensitive Building Height
- viii. Landslide vulnerable zones will be identified from the study.
- ix. Liquefaction potential index (LPI) map will be constructed from study data.
- x. Formulation of Policies and plans for mitigation of different types of hazards, minimizing the adverse impacts of climate change and recommend possible adaptation strategies for the region.

## **2. METHODOLOGY**

### **2.1. Strategic Methodology**

The methodology consists of both field and laboratory investigations. To conduct this project work, geomorphological, geotechnical and geophysical data of soil will be collected, analysed and interpreted. Geomorphological data will be collected from image of the study area to prepare a geomorphological map. Geotechnical data will be collected from field investigations *i.e.*, boring, standard penetration test (SPT), and laboratory investigations *i.e.*, soil physical properties test, consolidation test, direct shear test and triaxial test of undisturbed soil sample. Geophysical data will be collected from down-hole seismic test (PS

logging) and Multi-channel analysis of surface wave (MASW) and Singles Microtremor survey. The total works will be conducted by the following methodology-

### **2.1.1. Geophysical Investigation**

Field geophysical investigation is conducted to achieve the purpose of seismic risk and damage assessment. Seismic site characterization by analyzing seismic wave propagation velocity from acquired shallow seismic wave form data is the main objective. P-S logging, Multi Channel Analysis of Surface Wave (MASW) and Microtremor tools are involved in geophysical investigation.

General purposes of the geophysical survey:

- To estimate shear wave velocity and measure soil/rock properties (i.e. shear modulus, bulk modulus, compressibility, and Poisson's ratio)
- Engineering geological map development based on AVS30
- To Seismic site response study
- Risk Sensitive Building Height
- Characterization of strong motion sites
- Utilize this information for seismic hazard analysis

### **2.1.2. Geotechnical Investigation**

Geotechnical investigations have become an essential component of every construction to ensure safety of human beings and materials. It includes a detailed investigation of the soil to determine the soil strength, composition, water content, and other important soil characteristics.

Geotechnical investigations are executed to acquire information regarding the physical characteristics of soil and rocks. The purpose of geotechnical investigations is to design earthworks and foundations for structures, and to execute earthwork repairs necessitated due to changes in the subsurface environment. A geotechnical examination includes surface and subsurface exploration, soil sampling, and laboratory analysis. Geotechnical investigations are also known as foundation analysis, soil analysis, soil testing, soil mechanics, and subsurface investigation. The samples are examined prior to the development of the location. Geotechnical investigations have acquired substantial importance in preventing human and material damage due to the earthquakes, foundation cracks, and other catastrophes.

Geotechnical investigations can be as simple as conducting only a visual assessment of the site or as detailed as a computer-aided study of the soil using laboratory tests.

General purposes of the geotechnical survey:

- Sub-surface lithological 3D model development
- Foundation layers delineation and developing engineering properties of the sub-soil
- Landslide vulnerable zones will be identified from the study
- Liquefaction susceptibility or Liquefaction potential index (LPI) map will be constructed from study data

Following investigations given in Table that will be conducted for the preparation of engineering geological maps for rural part of MUDP Project area:

Table : Geotechnical and geophysical investigation will be carried-out in the rural part of MUDP Project Area

Name of Union	Name of investigations			
	Borelog with SPT ( upto 30m)	PS logging (30m depth)	MASW (30m depth)	Single Microtremor
Ichhakhali, Wahedpur, Osmanpur, Karerhat, Katachhara, Khaiyachhara, Zorwarganj, Durgapur, Dhum, Maghadia, Mayani, Mithanala, Mirsharai, Saherkhali, Haitkandi and Hinguli	85	15	20	30

## 2.2. Detail Procedures Of Survey/Testing

The methodology consists of both field and laboratory investigations. To conduct this project work, geomorphological, geotechnical and geophysical data of soil will be collected, analysed and interpreted. Geomorphological data will be collected from satellite image of the study area to prepare a geomorphological map. Geotechnical data will be collected from field investigations i.e., boring, standard penetration test (SPT), and laboratory investigations i.e., soil physical properties test, consolidation test, direct shear test and triaxial test of undisturbed soil sample. Geophysical data will be collected from down-hole seismic test (PS logging) and Multi-channel analysis of surface wave (MASW) and Singles Microtremor survey. The total works will be conducted by the following methodology-

The method of testing/surveying, application, Instrumentation and previous works of Geophysical and Geotechnical investigation are given below-

### 2.2.1. Test Detail And Procedure Of Downhole Seismic Test (Ps Logging)

Seismic down hole test is a direct measurement method for obtaining the shear wave velocity profile of soil stratum. The seismic down hole test aims to measure the travelling time of elastic wave from the ground surface to some arbitrary depths beneath the ground. The seismic wave was generated by striking a wooden plank by a 7kg sledge hammer. The plank was placed on the ground surface at around 3 m in horizontal direction from the top of borehole. The plank was hit separately on both ends to generate shear wave energy in opposite directions and is polarized in the direction parallel to the plank.

The shear wave emanated from the plank is detected by a tri-axial geophone. The geophone was lowered to 1 m below ground surface and attached to the borehole wall by inflating an air bladder. Then, the measurements were taken at every 1 m interval until the geophone was lowered to 30 m below ground surface. For each elevation, 6 records were taken and then used to calculate the shear wave velocity. The first arrival time of an elastic wave from the source to the receivers at each testing depth can be obtained from the downhole seismic test.



**Figure 2.1 Field Data Acquisition by PS logger**


Two geophones are lowered in the hole by keeping them 1.5m apart. There exists two ways of moving geophone either upward or downward. Say, if the hole is 30m then the bottom geophone is kept at 30m and then the top geophone will be at 28.5m and then we bring these geophones upward by taking reading after each meter and for downward is vice versa. In Downhole Seismic, an accelerometer mounted to a wooden plank source is used to trigger data collection.



**Figure 2.2 Main Component of the Freedom Data PC**



**Figure 2.3 Receiver Orientation in Sinco casing**

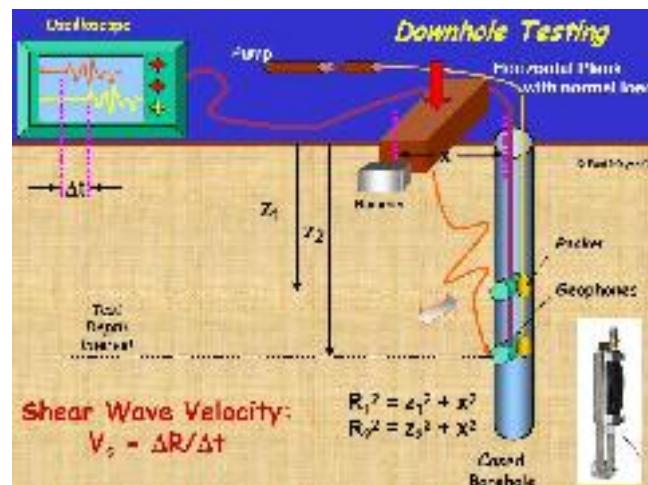

**Figure 2.4 Calculation of Shear Wave Velocity by Down hole Seismic, where  $R_1$ =Distance between source to top geophone and  $R_2$ =Distance between source to bottom geophone**



**Figure 2.5 To set the wooden plank 1.0 meters from a borehole**



**Figure 2.6 To attach the trigger to a hammer.**



**Figure 2.7 To connect the air pump with a battery.**




**Figure 2.8 To connect the computer with cables which are connected to the geophone.**



**Figure 2.9 Make sure that the air bag at the geophone works. Then, put the geophone into the borehole and fix the safety rope with the holder**




**Figure 2.10** Hit the wooden plank in 3 directions which are on the left, right and vertical directions.

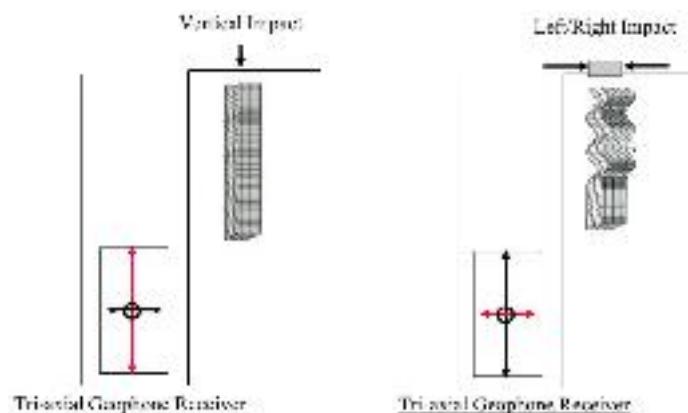

**Figure 2.11** Triaxial geophone behavior.


### Analysis and Calculation from PS Logging

P-wave travel time is calculated by the first arrival of either peak or trough in the seismic trace and P-wave is characterized by higher frequency and lower amplitude. On the other hand, shear wave is characterized by lower frequency but high amplitude.

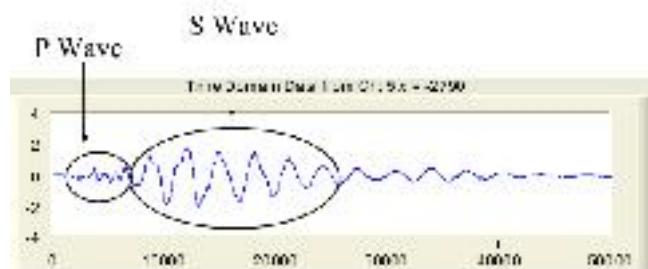

**Figure 2.12** P wave and S wave in the Computer Window

S wave travel time is calculated from the first cross as we hit in both direction of the wooden plank so there generate opposite phase shear waves in radial and transverse direction and cross at some points.

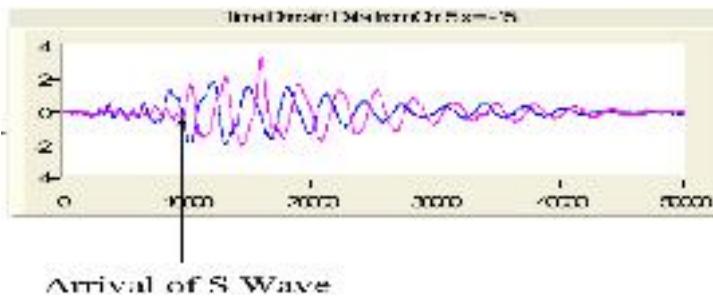

**Figure 2.13 Arrival of S wave**

Moreover, bounty of engineering geological parameters of soil can be determined whenever shear wave and compressional wave velocity is known. The Shear Modulus (G), Constrained Modulus (M) , Poisson Ratio (v) and Young Modulus(E) of the soil profiles are calculated using the following formula:

$$G = \rho V_s^2$$

$$M = \rho V_p^2$$

$$\nu = [0.5(\frac{V_p}{V_s})^2 - 1] / [(\frac{V_p}{V_s})^2 - 1]$$

$$E = 2G(1+\nu)$$

Where,  $\rho$  is the local soil mass density (unit weight divided by gravity) obtained from the boring log information is taken 2 gm/cc for based on SPT results.

Besides, the average shear wave velocity upto 30 m depth has been determined using the following equation.

$$T_{av} = \sum \frac{H_i}{V_i}$$

$$AVS.36 = \frac{30}{T_{av}}$$

Where,  $H_i$  : Thickness of  $i$  th layer and  $\beta D = \sum H_i$   
 $V_i$ : S-wave velocity of  $i$  th layer

## Instrument List

The PS logging test equipments are listed below-

1. One Freedom NDT PC
2. Two High Sensitive Tri-axial Geophones.
3. Two set Cable/Air lineSpool
4. Wooden Plank.
5. 7kg weight Hammer.



**Figure 2.14 Freedom Data PC with P-SV Downhole Source and 1 Tri-axial Geophone Receiver used in Crosshole Seismic Investigations**

#### **Application of PS Logging Test**

Downhole Seismic (PS Logging) system is useable for providing information on dynamic soil and rock properties for earthquake design analyses for structures, liquefaction potential studies, site development, and dynamic machine foundation design. The investigation determines shear and compressional wave depth versus velocity profiles. Other parameters, such as Poisson's ratios and moduli, can be easily determined from the measured shear and compressional wave velocities. The PS Logging is a downhole method for the determination of material properties of soil and rock.

#### **2.2.2. Test Detail And Procedure Of Multi-Channel Analysis Of Surface Wave (MASW)**

MASW utilizes the frequency dependent property of surface wave velocity, or the dispersion property, for Vs profiling. It analyses frequency content in the data recorded from a geophone array deployed over a moderate distance.


The processing of MASW is schematically summarized in Figure 2.15. The principle MASW is to employ and arrange a number of sensors on the ground surface to capture propagating Rayleigh waves, which dominates two-thirds of the total seismic energy generated by impact sources. If the tested ground is not homogeneous, the observed waves will be dispersive, a phenomenon that waves propagate towards receivers with different phase velocities depending on their respective wavelength (see Figure 2.16).

From field observation, the data in space-time domain (for instance, the left plot in Figure 3.19) is transformed to frequency-velocity domain by slant-stack and Fast Fourier transform using


$$S(\omega, c) = \int e^{-i\frac{\omega}{c}x} U(x, \omega) dx$$

where  $U(x, \omega)$  is the normalized complex spectrum obtained from the Fourier transform of  $u(x, t)$ ,  $\omega$  is the angular frequency,  $c$  is the testing-phase velocity and  $S(\omega, c)$  is the slant-stack amplitude for each  $\omega$  and  $c$ , which can be viewed as the coherency in linear arrival pattern along the offset range for that specific combination of  $\omega$  and  $c$ . When  $c$  is equal to the true phase velocity of each frequency component, the  $S(\omega, c)$  will show the maximum value. Calculating  $S(\omega, c)$  over the frequency and phase-velocity range of interest generates the phase-velocity spectrum where dispersion curves can be identified as high-amplitude bands. The dispersion curve is, then, used in inversion process to determine the shear wave velocity profile of the ground.

In theory, a phase-velocity spectrum can be calculated for a known layer model  $\mathbf{m}$  and the field setup geometry. This process is called forward modeling. The inversion process tries to adjust assumed layer model as much as possible through several iterations in order to make the calculated spectrum looks similar to the dispersion curve obtained from the field test. Once the algorithm can match the calculated with the measured one, the assumed model will be considered as the true profile.

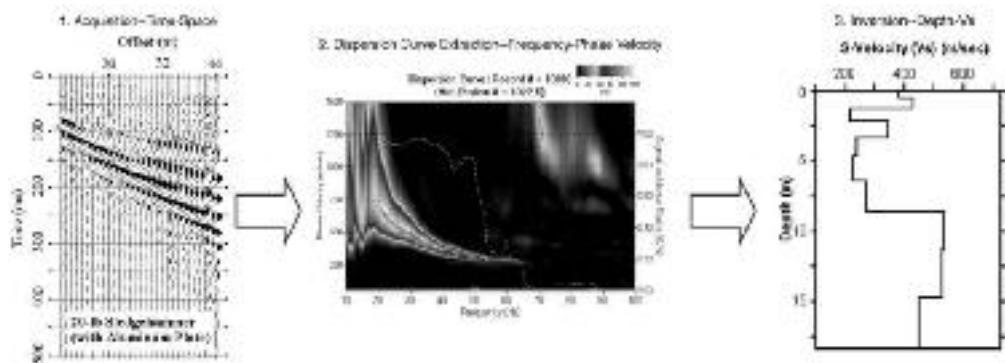

**Figure 2.15** MASW data processing (Park et al., 1999)

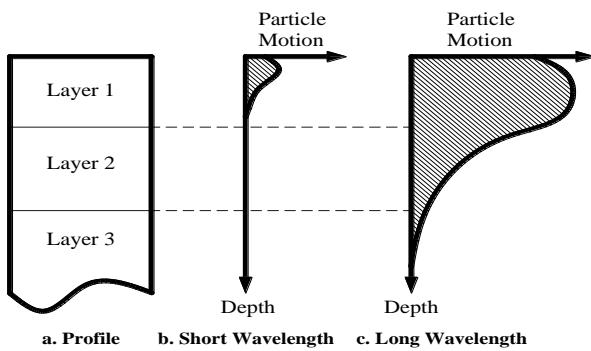


**Figure 2.16** Rayleigh wave dispersion in layer media (Rix, 1988)

### Active Source Data Acquisition


The active MASW method was introduced in GEOPHYSICS in 1999. This is the most common type of MASW survey that can produce a 2D VS profile. It adopts the conventional mode of survey using an active seismic source (e.g., a sledge hammer) and a linear receiver array, collecting data in a roll-along mode. It utilizes surface waves propagating horizontally along the surface of measurement directly from impact point to receivers. It gives this VS information in either 1D (depth) or 2D (depth and surface location) format in a cost-effective and time-efficient manner. The maximum depth of investigation ( $z_{\max}$ ) is usually in the range of 10–30 m, but this can vary with the site and type of active source used.

Seismic energy for active source surface wave surveys can be created by various ways, but we used a sledgehammer to impact a striker plate on the ground since it is a low-cost, readily available item. To signal to the seismograph when the energy has been generated, a trigger switch is used as the interface between the hammer and the seismograph. When the sledgehammer hits the ground, a signal is sent to the seismograph to tell it to start recording.

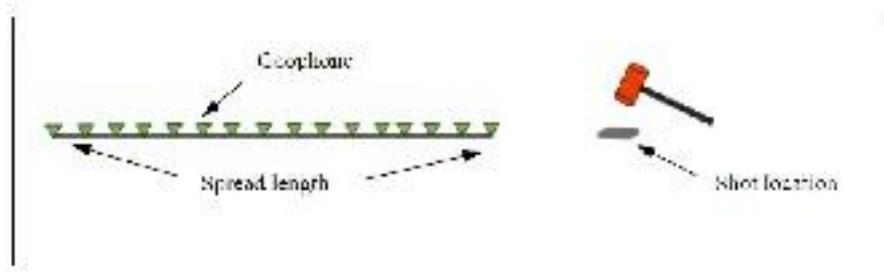

**Figure 2.17 Schematic of linear active source spread configuration**

During our field work we used 12 channels with 3m interval, 1.5 m source ( sledge hammer) offset, 1 ms sample interval, 2 seconds record length and auto trigger option. Natural frequency of Geophone is 10 Hz. And the active source spread configuration for the station 20 was like below:

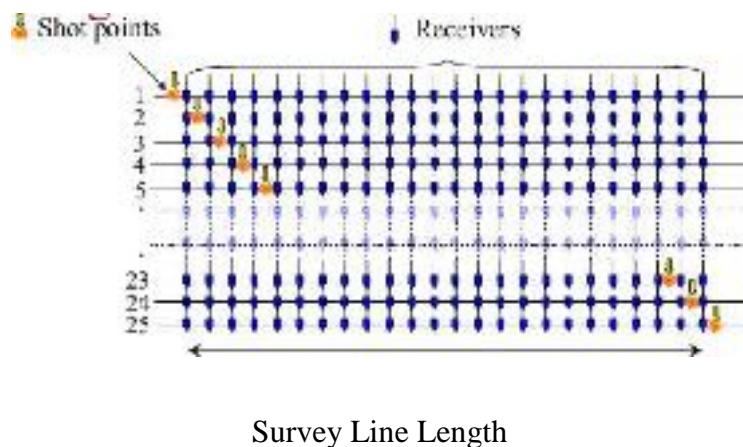

(Number of Sources= Number of Receivers + 1)



**Figure 2.18 MASW Field Data Acquisition**


At every station one data was acquired by stacking (6 times hammer hit) to enhance the data quality.

### Analysis of MASW

In the phase velocity analysis, SPAC (Spatial Autocorrelation) method (Okada, 2003) is employed. Okada (2003) shows Spatial autocorrelation function  $\rho(\omega, r)$  is expressed by Bessel function.

$$\rho(\omega, r) = J_0(\omega r / c(\omega)) \quad \text{--- (1)}$$

Where,  $r$  is the distance between receivers,  $\omega$  is the angular frequency,  $c(\omega)$  is the phase velocity of the waves,  $J_0$  is the first kind of Bessel function. The phase velocity can be obtained at each frequency using equation (1). Figure 3-20 shows an example of dispersion curve of the survey, the frequency range between 15 and 50 Hz.

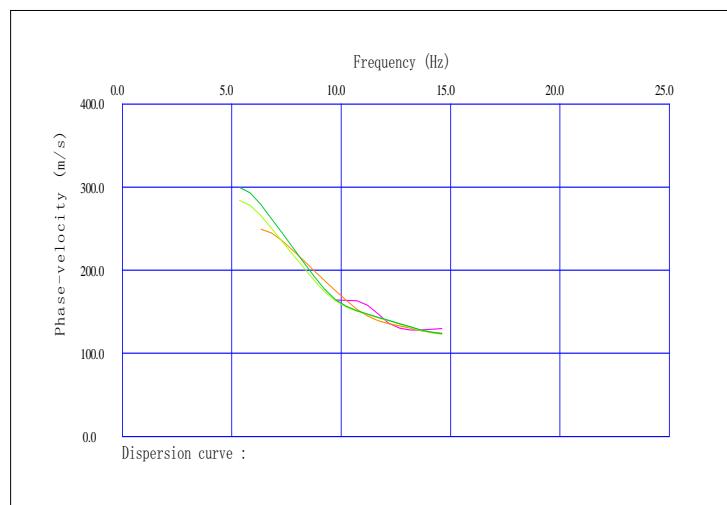



**Figure 2.19 Dispersion Curve**

A one-dimensional inversion using a non-linear least square method has been applied to the phase velocity curves. In the inversion, the following relationship between P-wave velocity ( $V_p$ ) and Vs (Kitsunezaki et. Al., 1990):

$$V_p = 1.29 + 1.11Vs \quad \text{--- (2)}$$


Where  $V_p$  and  $V_s$  are the P-wave velocity and S-wave velocity respectively in (km/sec).

These calculations are carried out along the measuring line, and the S-wave velocity distribution section was analyzed, then summarized to one dimensional structure; SeisImager software can also give a 2-D velocity model (for active), a sample of which is shown in Fig. 2.20.

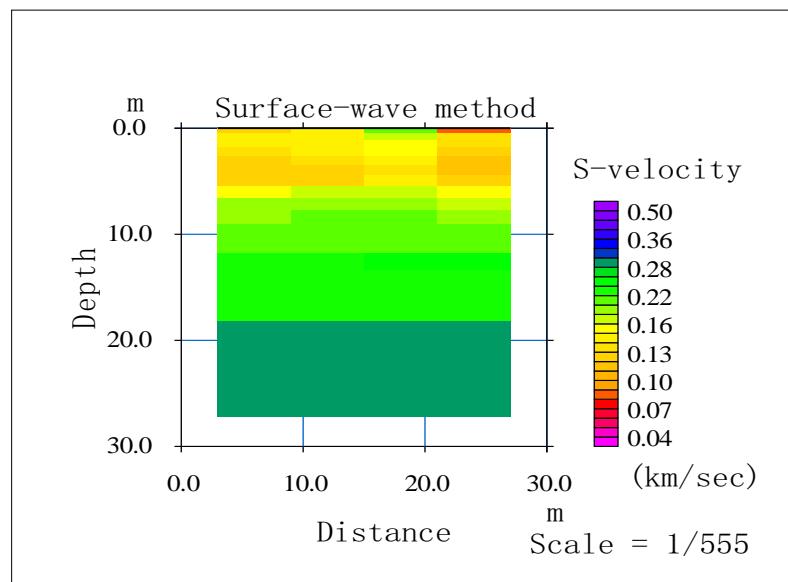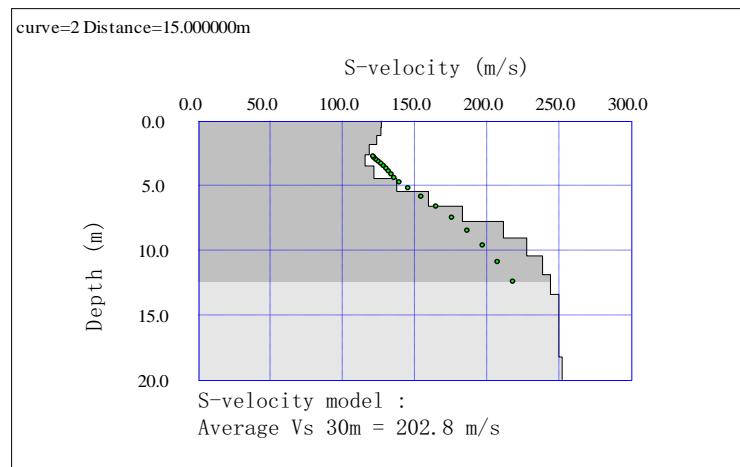


**Figure 2.20 One dimensional Velocity Structure and 2 D velocity Model**

Figure 2.21 shows an example of dispersion curve for passive MASW and phase velocity versus frequency as a sample. A one dimensional inversion using a non-linear least square method has been applied to the phase velocity curves and one dimensional S-wave velocity structures down (Figure 2.22).

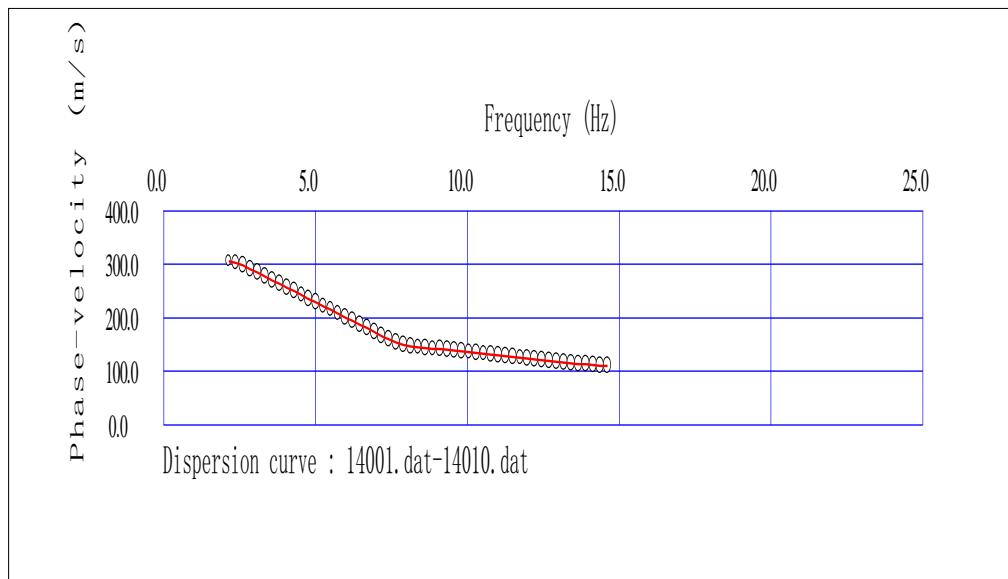

**Figure 2.21 Dispersion Curve for Passive MASW**

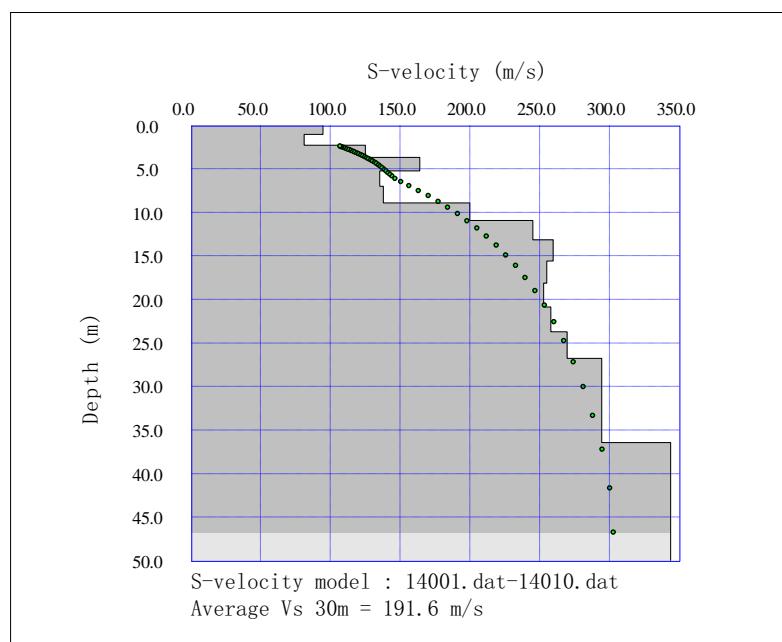

**Figure 2.22 One dimensional velocity structure for Passive MASW**

### Calculation of AVS 30

The AVS30 can be calculated as follows:

$$T_{30} = \sum(H_i/V_i)$$

$$AVS\ 30 = (30/T_{30})$$

Where,  $H_i$ = Thickness of the  $i$  th layer and  $\sum H_i = 30$

$V_i = S$  wave velocity of the  $i$  th layer

### 2.2.3. Test Detail And Procedure Of Microtremor Measurement (Single Microtremor)

Microtremor method is a practical and economical seismic survey since it has potential to explore deep soils without a borehole. Microtremors are the phenomenon of very small vibrations of the ground surface even during ordinary quiet time as a result of a complex stacking process of various waves propagating from remote man-made vibration sources caused by traffic systems or machineries in industrial plants and from natural vibrations caused by tidal and volcanic activities. Observation of microtremors can give useful information of dynamic properties of the site such as predominant period, amplitude, peak ground acceleration and shear wave velocity.

#### Single Microtremor observation

##### Method

1) The transfer function of surface layer

$$S_{Hv} = \frac{\text{Hor. spectrum at surface}}{\text{Hor. spectrum at base}} = \frac{S_{Hs}}{S_{Hb}}$$

2) Vertical component of MT is affected by Rayleigh wave at surface, but no effect at base and no amplification of vertical waves.  
Define the effect of Rayleigh wave as;

$$S_{Vv} = \frac{\text{Ver. spectrum at surface}}{\text{Ver. spectrum at base}} = \frac{S_{Vs}}{S_{Vb}}$$

3) To eliminate the effect of Rayleigh wave, define new transfer function as;

$$S_{Hv} = \frac{S_{Hs}}{S_{Hb}} - \left( \frac{S_{Vs}}{S_{Vb}} \right)^{1/2} \left( \frac{S_{Vs}}{S_{Vb}} \right)$$

$$H/V \text{ spectrum} = \frac{Hs}{Vs} = \frac{\sqrt{F_{1s} \cdot F_{2s}}}{F_{1b}}$$

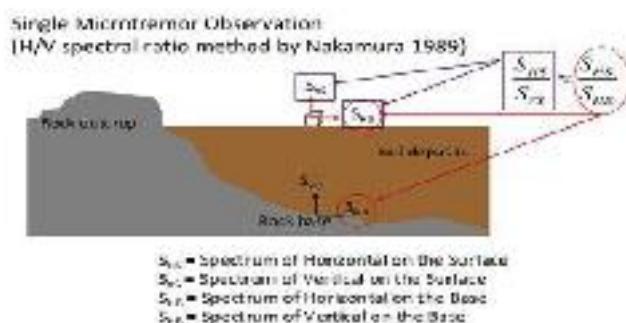


Figure 2.23 Fundamental of Single Microtremor observation

## Field Data Acquisition System


Microtremor observations are performed using portable equipment, which is equipped with a super-sensitive sensor, a wire comprising a jack in one site and USB port in another site, and a laptop computer is also used. The microtremor equipment has been set on the free surface on the ground without any minor tilting of the equipment. The N-S and E-W directions are properly maintained following the directions arrowed on the body of the equipment. The sampling frequency for all equipments is set at 200Hz. The low-pass filter of 40Hz is set in the data acquisition unit. Like the seismometer or accelerometer, the velocity sensor used can measure three components of vibrations: two horizontal and one vertical. The natural period of the sensor is 2 sec. A global positioning system (GPS) is used for recording the coordinates of the observation the available frequency response range for the sensor is 0.5-20Hz. sites. The length of record for each observation was 10~20 min. In all fields of this project this data acquisition system has be applied.



**Figure 2.24 Field data acquisition of Single microtremor**

### 2.2.4. Standard Penetration Test (SPT) Method

The Standard Penetration test (SPT) is a common in situ testing method used to determine the geotechnical engineering properties of subsurface soils. The test procedure is described in the British Standard BS EN ISO 22476-3, ASTMD1586. A short procedure of SPT N-value test is described in the following paragraph.

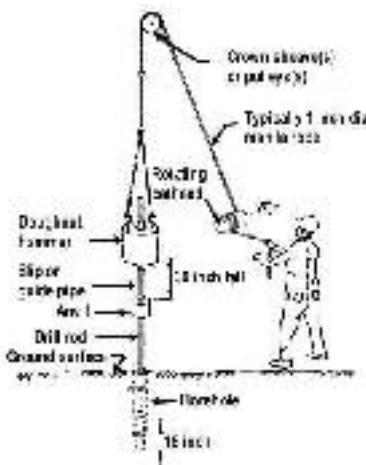


**Figure 2.25 The SPT sampler in place in the boring with hammer, rope and cathead (Adapted from Kovacs, et al., 1981)**

The test in our field uses a thick-walled sample tube, with an outside diameter of 50 mm and an inside diameter of 35 mm, and a length of around 650 mm. This is driven into the ground at the bottom of a borehole by blows from a slide hammer with a weight of 63.5 kg (140 lb) falling through a distance of 760 mm (30 in). The sample tube is driven 150 mm into the ground and then the number of blows needed for the tube to penetrate each 150 mm (6 in) up to a depth of 450 mm (18 in) is recorded. The sum of the number of blows required for the second and third 6 in. of penetration is termed the "standard penetration resistance" or the "N-value". In cases where 50 blows are insufficient to advance it through a 150 mm (6 in) interval the penetration after 50 blows is recorded. The blow count provides an indication of the density of the ground, and it is used in many empirical geotechnical engineering formulae.

The main objective of SPT is as follows:

- Boring and recording of soil stratification.
- Sampling (both disturbed and undisturbed).
- Recording of SPT N-value
- Recording of ground water table.

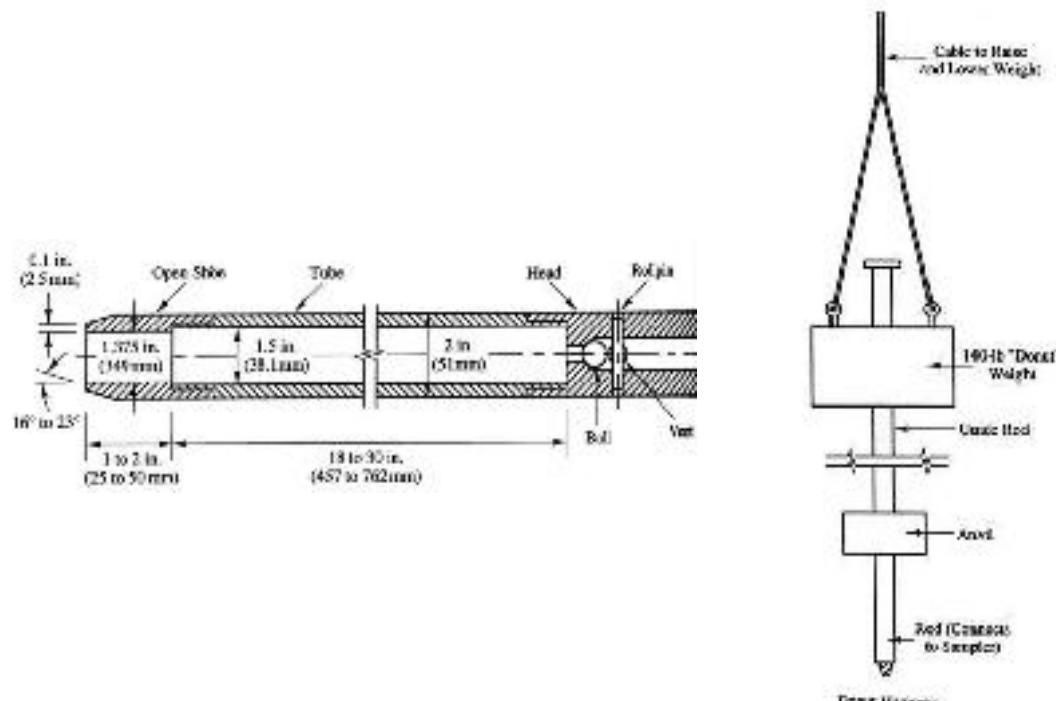

**Figure 2.26 SPT Sampler and Donut Hammer**

### 3. GEOPHYSICAL AND GEOTECHNICAL SURVEY

#### 3.1. GEOPHYSICAL INVESTIGATIONS

The main objectives of these investigation to estimate local site effects against earthquakes and the task has been segregated by three-fold: 1) To determine shear wave velocity profile at various sites, 2) To classify soil conditions according to seismic design specifications and 3) To analyze soil amplifications in the area. Field measurements of shear wave velocities were conducted in Mirsharai Upazila and described in below.

Shear wave velocity profile ( $V_s$  profile) in the field were carried out by three geophysical exploration methods namely 1) downhole seismic test (PS logging), 2) Multichannel Analysis of Surface Wave (MASW) and 3) Single Microtremor.

Downhole seismic test is a direct measurement method for obtaining the shear wave velocity profile of soil stratum. Multichannel analysis of surface waves (MASW) is a non-invasive technique which can be used to determine the  $V_s$  profile at sites. Single Microtremor is used to determine predominant period and compare with  $V_s$  data. In this project, the downhole seismic, MASW and Single Microtremor tests were performed at 15, 20 and 30 locations respectively. Geophysical investigations activities and field data acquisition are shown in Figure-3.1.





**Figure 3.1 Geophysical investigations activities and field data acquisition**

### 3.1.1. MASW Survey Result

To predict subsurface shear-wave interval velocities, multi-spectral analyses of surface waves (MASW) are popularly used. Shear wave velocities can also extract additional velocity-related information such as mechanical properties of soils and rocks. In general, MASW data compare favorably to other geophysical methods for predicting interval velocities. Furthermore, comparisons to vertical seismic profiles correlate well with MASW predicted shear wave interval velocities. In this perspective, MASW test has been completed at twenty (20) different locations at Mirsharai Upazilla by 15<sup>th</sup> February to 21<sup>st</sup> February and field raw data has been processed and also interpreted. Location of MASW tests are shown in Figure-3.2 and Table- 3.1. The investigation and results of the MASW test activities and result are enclosed in Appendix A and B at tabular and also graphical format.

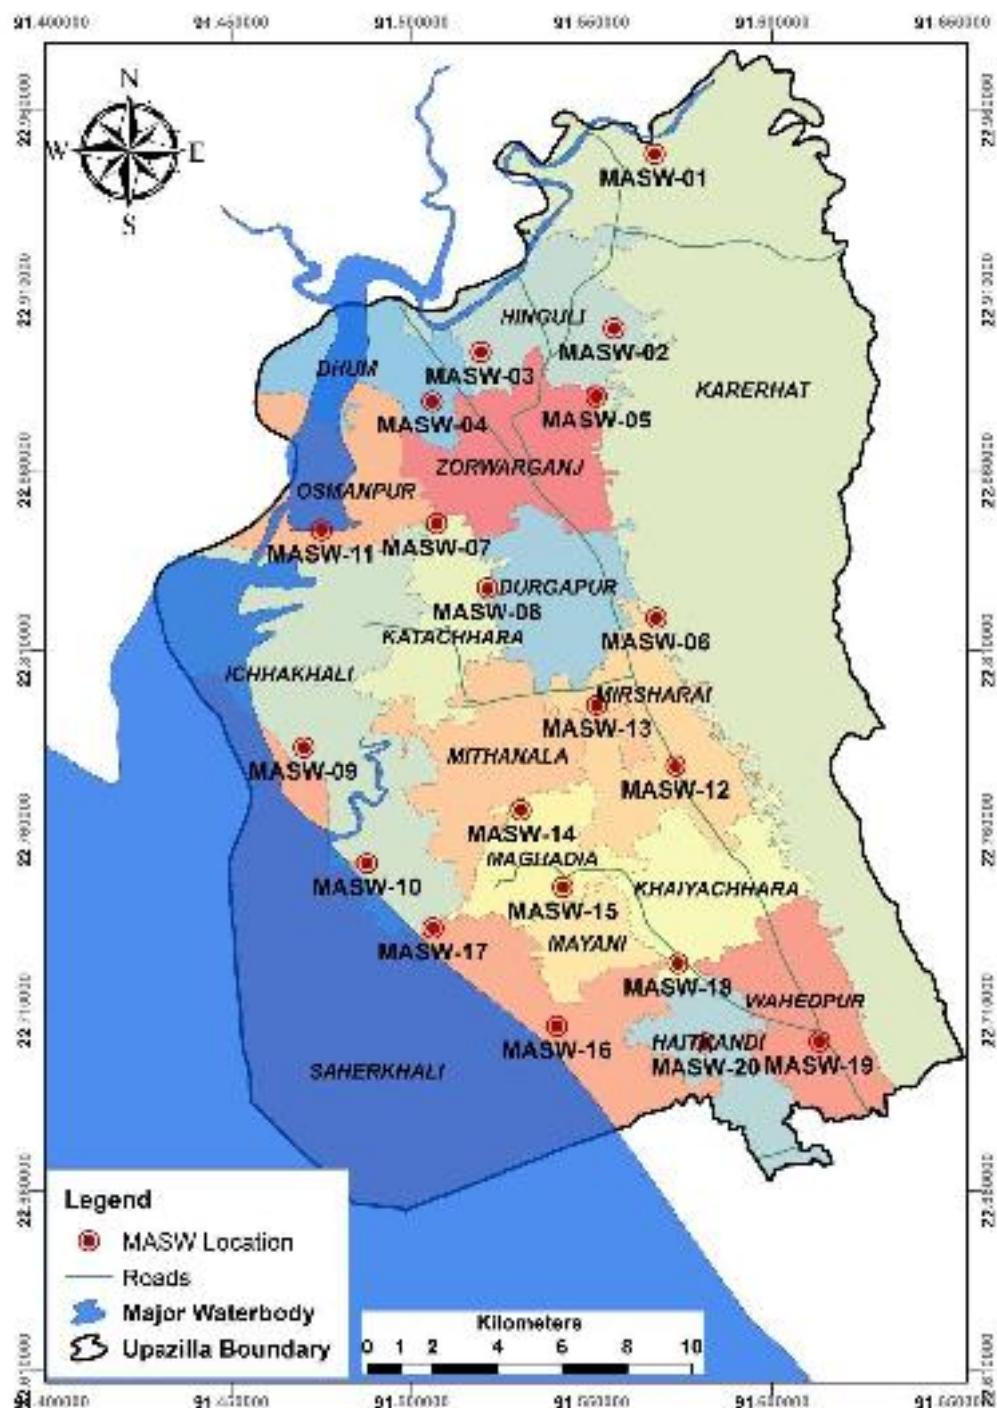


Figure 3.2 Location for MASW survey

Table-3.1 MASW survey location

MASW_ID	Location	Latitude	Longitude
MASW-01	Olinagar L.B. Adorsho High School	22.9479045	91.5673217
MASW-02	Middle Azomnogor, Hinguli	22.89947	91.55612
MASW-03	Jamalpur, Barayarhat Pourashava	22.892964	91.519036
MASW-04	Naherpur, Dhum Union	22.879295	91.505672
MASW-05	Khilmurali, Jorawargonj	22.880663	91.551181
MASW-06	Mohamaya Lake Gate, Mirshorai	22.819062	91.567814
MASW-07	Temohoni, Katachara Union	22.84534	91.506941
MASW-08	Uttav, Katachara Union	22.833622	91.519465
MASW-09	Veribadh, Ichakhali	22.783081	91.469953
MASW-10	BEZA, Ichakhali	22.75094	91.48756
MASW-11	Muhuri Project, Veribadh	22.843563	91.47481
MASW-12	Mirshorai College, Mirshorai	22.77799	91.57322
MASW-13	Bishwo Darbar, Amantola	22.794934	91.551293
MASW-14	Tegoria, Magadia	22.765763	91.530332
MASW-15	Moddhom Magadia Miabari, Magadia	22.74429	91.54198
MASW-16	Veribadh, Saherkhali	22.70568	91.5403
MASW-17	Bamansundar Khal, Shaherkhali, BEZA	22.733001	91.50586
MASW-18	N Hatkumli, Joberhazi Road, Haitkandi	22.72324	91.57393
MASW-19	Choto kamal Daho, Kankir hat bazar road, Wahedpur	22.70142	91.61302
MASW-20	Monir hut, East Hait Kandi	22.70559	91.58147

Table- 3.2 Summary of MASW Test Result


MASW-01		MASW-02		MASW-03		MASW-04		MASW-05	
Depth (m)	Velocity (m/s)								
0	161	0	158	0	137	0	109	0	138
1.7	163	1.7	187	1.7	149	1.7	121	1.7	156
3.8	164	3.8	209	3.8	160	3.8	129	3.8	178
6.3	166	6.3	221	6.3	185	6.3	171	6.3	212
9.2	176	9.2	244	9.2	216	9.2	201	9.2	240
12.5	186	12.5	269	12.5	241	12.5	224	12.5	261
16.3	194	16.3	288	16.3	262	16.3	238	16.3	278
20.4	200	20.4	301	20.4	274	20.4	250	20.4	289
25	205	25	317	25	290	25	270	25	296
30	205	30	317	30	290	30	270	30	296
AVS 30 - 183.8 m/s		AVS 30 - 250.7 m/s		AVS 30 - 217.6 m/s		AVS 30 - 191.9 m/s		AVS 30 - 232.6 m/s	

Table- 3.2 Summary of MASW Test Result (continue)

MASW-06		MASW-07		MASW-08		MASW-09		MASW-10	
Depth (m)	Velocity (m/s)								
0	119	0	117	0	123	0	110	0	132
1.7	122	1.7	127	1.7	125	1.7	122	1.7	138
3.8	155	3.8	130	3.8	142	3.8	131	3.8	132
6.3	207	6.3	144	6.3	175	6.3	154	6.3	149
9.2	244	9.2	165	9.2	201	9.2	177	9.2	172
12.5	266	12.5	197	12.5	219	12.5	195	12.5	199
16.3	289	16.3	221	16.3	234	16.3	212	16.3	219
20.4	312	20.4	244	20.4	241	20.4	226	20.4	237
25	326	25	262	25	248	25	234	25	263
30	326	30	262	30	248	30	234	30	263
AVS 30 - 225.2 m/s		AVS 30 - 181.1 m/s		AVS 30 - 194.1 m/s		AVS 30 - 177.2 m/s		AVS 30 - 186.1 m/s	
MASW-11		MASW-12		MASW-13		MASW-14		MASW-15	
Depth (m)	Velocity (m/s)								
0	134	0	156	0	113	0	130	0	151
1.7	141	1.7	159	1.7	122	1.7	136	1.7	154
3.8	144	3.8	160	3.8	125	3.8	159	3.8	168
6.3	149	6.3	176	6.3	159	6.3	183	6.3	189
9.2	161	9.2	211	9.2	192	9.2	210	9.2	212
12.5	175	12.5	238	12.5	214	12.5	230	12.5	233
16.3	187	16.3	265	16.3	236	16.3	242	16.3	251
20.4	194	20.4	286	20.4	257	20.4	249	20.4	265
25	210	25	318	25	287	25	254	25	281
30	210	30	318	30	287	30	254	30	281
AVS 30 - 170.9 m/s		AVS 30 - 222.7 m/s		AVS 30 - 190.6 m/s		AVS 30 - 204.2 m/s		AVS 30 - 217.2 m/s	
MASW-16		MASW-17		MASW-18		MASW-19		MASW-20	
Depth (m)	Velocity (m/s)								
0	113	0	94	0	120	0	117	0	116
1.7	111	1.7	103	1.7	124	1.7	125	1.7	122
3.8	130	3.8	140	3.8	142	3.8	139	3.8	130
6.3	151	6.3	175	6.3	161	6.3	180	6.3	143
9.2	172	9.2	207	9.2	179	9.2	207	9.2	161
12.5	190	12.5	217	12.5	200	12.5	230	12.5	185
16.3	199	16.3	220	16.3	213	16.3	247	16.3	209
20.4	203	20.4	221	20.4	236	20.4	262	20.4	233
25	206	25	221	25	263	25	291	25	250
30	206	30	221	30	263	30	291	30	250
AVS 30 - 168.1 m/s		AVS 30 - 178.9 m/s		AVS 30 - 186.0 m/s		AVS 30 - 201.8 m/s		AVS 30 - 175.4 m/s	



Velocity below 160 m/s  
Velocity 241 m/s to 280 m/s



Velocity 160 m/s to 200 m/s  
Velocity above 280 m/s



Velocity 201 m/s to 240 m/s

The shear wave velocity is a fundamental parameter required to define the dynamic properties of soils. If the soil velocity is less than 180m/s, it can be said as loose or soft soil. Estimation of shear wave velocity (Vs) / average shear wave velocity (AVS) and mapping is a way to characterize varying site conditions, and it can also be used to model earthquake-related ground shaking (e.g., Petersen and others, 1997; 1999; Wills and others, 2000). Estimation of AVS aims to generate a map of estimated shear wave velocities for the upper 30m of the subsurface. Further this map can be used for seismic site response analysis i.e., to determine peak ground acceleration (PGA) and spectral acceleration (SA) values of both bedrock and ground surface.

According to MASW test results S-wave velocity more than 180 m/s varies from 6.3m to 12.5m depth, which is suitable for foundation (Table-3.2). Foundation depth should be varies from around 6m to 13m in overall Mirsharai Upazila.

### **3.1.2. Down-Hole Seismic (PS Logging) Test Results**

As a fundamental parameter, shear wave velocity is required to define the dynamic properties of soils. If the soil velocity is less than 180m/s, it can be said as loose or soft soil. Estimation of shear wave velocity (Vs) / average shear wave velocity (AVS) and mapping is a way to characterize varying site conditions, and it can also be used to model earthquake-related ground shaking. Estimation of AVS aims to generate a map of estimated shear wave velocities for the upper 30m of the subsurface. Further this map can be used for seismic site response analysis i.e., to determine peak ground acceleration (PGA) and spectral acceleration (SA) values of both bedrock and ground surface. In this context, Downhole seismic test data acquisition has been completed at Dohar Upazilla in fifteen (15) different locations on date 19<sup>th</sup> February to 27<sup>th</sup> February 2018. Location of MASW tests are shown in Figure- 3.3 and Table-3.3. Field data has been processed, and the investigation of downhole seismic test is enclosed in Appendix C and D at tabular and also graphical format.

Downhole seismic (PS Logging) data shows S-wave velocity more than 180 m/s at different depth in different locations at Mirashari Upazila, which varies from 6 to 15m at different locations (Table 3.4).

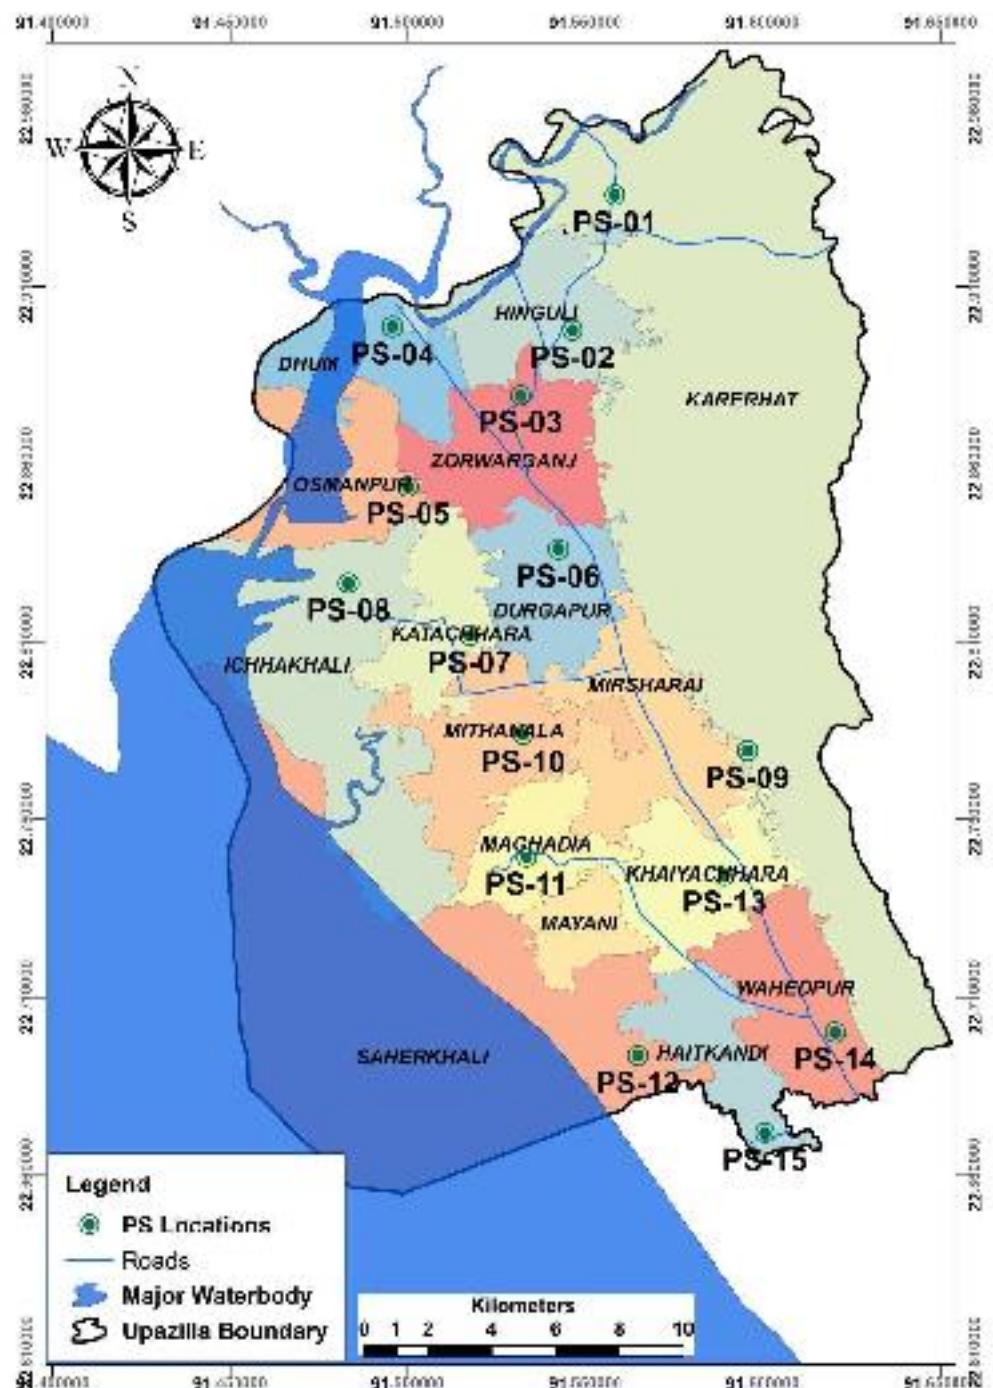


Figure 3.3 Location for PS Logging test

Table-3.3 Location of Downhole Seismic (PS logging) test

PS_ID	Borehole_ID	Location	Latitude	Longitude
PS-01	BHM02	Choturua, Ward-1, Korerhat	22.93579	91.55832
PS-02	BHM07	Khil hinguli Govt. Primary School	22.89774	91.5464
PS-03	BHM11	Imampur Titabot tola Furkania Madrasha	22.87949	91.53175
PS-04	BHM12	Bono Chowdhury Jame Mosque, Mobarokgun, Dhoom	22.89871	91.49581
PS-05	BHM20	39 no. East Shahedpur Govt. Primary School, Azampur	22.85378	91.50001
PS-06	BHM25	Jaforer Poultry Farm, Choitonner Hat, Durgapur	22.83615	91.54239
PS-07	BHM27	Abdus Sattar Bhuiyar Hat Govt. Primary school, Kata chora	22.81188	91.51746
PS-08	BHM35	Vanguni Bazar Baitunnur Jame Mmosque, Ichakhali	22.82661	91.48335
PS-09	BHM38	Ichakhali Economic Zone Office, Ichakhali	22.76242	91.46612
PS-10	BHM56	Hazi Badiul Alam Chowdhury Govt. Primary School, Mithanala	22.78397	91.53249
PS-11	BHM60	90 no. Maghadia NC Govt. Primary School, Maghadia	22.74951	91.53351
PS-12	BHM69	Dhoomkhali, Shaherkhali	22.69363	91.56484
PS-13	BHM72	Morjida Masima Taluk, Borotakia	22.74442	91.58926
PS-14	BHM79	West Wahedpur Molla para Mosque	22.7002	91.62035
PS-15	BHM84	South Baliadi Govt. Primary School	22.67191	91.60059

Table- 3.4 Summary of Downhole Seismic (PS Logging) Test Result

	PS01 (BH-M02)	PS02 (BH-M07)	PS03 (BH-M11)	PS04 (BH-M12)	PS05 (BH-M20)
Depth(m)	Velocity (m/s)				
1.5	218.20	177.77	133.62	112.81	106.07
3	331.38	168.47	149.36	118.24	96.89
4.5	370.07	180.21	161.78	122.49	153.29
6	191.51	212.53	223.61	88.25	185.62
7.5	303.65	221.51	222.10	183.28	151.84
9	380.95	231.22	228.56	190.27	163.51
10.5	168.56	244.62	304.54	186.40	177.56
12	287.94	237.01	230.00	164.56	128.19
13.5	307.22	234.49	334.73	178.43	215.39
15	288.55	249.24	230.64	192.25	287.39
16.5	336.65	246.72	430.52	211.59	211.44
18	288.86	297.56	383.87	230.90	230.80
19.5	432.76	277.81	431.70	259.73	192.57
21	576.49	292.18	192.63	288.69	384.16
22.5	863.26	277.54	307.82	260.05	226.95
24	1151.69	256.41	165.17	144.70	575.91
25.5	577.60	249.64	288.83	308.19	861.95
27	577.95	249.92	576.73	289.20	576.49
28.5	865.44	264.83	385.03	241.03	
30		270.07	385.02	385.36	

Table- 3.4 Summary of Downhole Seismic (PS Logging) Test Result (continue)

	PS06 (BH-M25)	PS07 (BH-M27)	PS08 (BH-M35)	PS09 (BH-M48)	PS10 (BH-M56)
Depth(m)	Velocity (m/s)				
1.5	126.97	166.16	90.25	177.72	118.34
3	120.13	135.32	95.98	272.26	116.54
4.5	161.38	135.58	123.12	378.50	157.67
6	126.93	136.90	125.60	390.89	156.78
7.5	153.25	187.51	206.10	377.53	277.39
9	128.01	253.95	143.36	380.55	150.03
10.5	146.32	236.31	209.85	273.34	202.70
12	164.71	239.92	229.45	287.76	118.57
13.5	286.95	243.96	197.44	307.03	223.46
15	287.78	252.88	144.40	230.82	168.71
16.5	230.90	262.14	211.53	259.62	349.49
18	384.07	243.30	383.36	288.47	296.69
19.5	288.68	233.23	240.50	231.00	287.76
21	288.89	226.92	192.72	384.49	375.30
22.5	231.39	222.26	211.93	288.67	249.48
24	289.11	242.41	288.86	288.72	178.13
25.5	433.17	240.38	212.06	307.94	215.34
27	231.57	238.21	289.02	288.79	398.42
28.5	308.52	249.91	481.14	231.11	361.03
30	385.75	246.42	577.25	288.83	221.66

Table- 3.4 Summary of Downhole Seismic (PS Logging) Test Result (continue)

	PS11 (BH-M60)	PS12 (BH-M69)	PS13 (BH-M72)	PS14 (BH-M79)	PS15 (BH-M84)
Depth(m)	Velocity (m/s)				
1.5	95.82	119.45	69.50	112.96	78.35
3	184.71	146.61	100.65	166.44	199.44
4.5	140.38	125.42	144.21	169.63	157.09
6	113.89	113.97	183.79	126.76	140.67
7.5	220.13	175.49	243.16	158.47	174.99
9	127.61	190.19	281.87	283.31	226.95
10.5	190.90	256.53	177.60	210.14	153.72
12	164.30	285.91	144.13	191.69	562.21
13.5	197.06	154.33	168.15	187.07	333.34
15	381.64	191.97	164.93	287.39	164.65
16.5	197.51	146.51	226.50	197.66	187.21
18	192.19	230.43	144.57	164.93	164.80
19.5	240.11	226.41	430.84	197.84	230.53
21	192.34	192.33	384.23	192.43	192.29
22.5	192.38	230.73	231.25	216.41	192.36
24	288.30	192.42	384.92	288.42	192.37
25.5	274.63	168.42	371.03	480.06	288.38
27	288.46	164.99	385.12	288.67	230.83
28.5	178.77		385.33	259.87	288.51
30	384.47		192.99	192.60	384.48

### **3.1.3. Single Microtremor Test Results**

Microtremor observations were performed using portable equipment, which is equipped with a ultra-sensitive sensor, a wire comprising a jack in one side and USB port in another side, and a laptop computer with GEODAS (Geophysical Data Acquisition System) made by Buttan Service Co. Japan, is used for the data acquisition.

The microtremor equipment has been set on the free surface on the ground without any minor tilting of the equipment. The N-S and E-W directions are properly maintained following the directions arrowed on the body of the equipment. The sampling frequency for all the measurements is set at 200 Hz. The low-pass filter of 50 Hz is set in the data acquisition unit. Like the seismometer or accelerometer, the velocity sensor used can measure three components of vibration: two horizontal and one vertical. The natural period of the sensor is 2 sec. The available frequency response range for the sensor is 0.5–20 Hz.

A global positioning system (GPS) is used for recording the coordinates of observation sites.

Three-components (NS, EW, and UD) of microtremors were observed during 10 minute.

Location of Microtremor tests are shown in Figure- 3.4 and Table- 3.5. Field data has been processed, and the investigation of microtremor tests are enclosed in Appendix E and F at tabular and also graphical format.

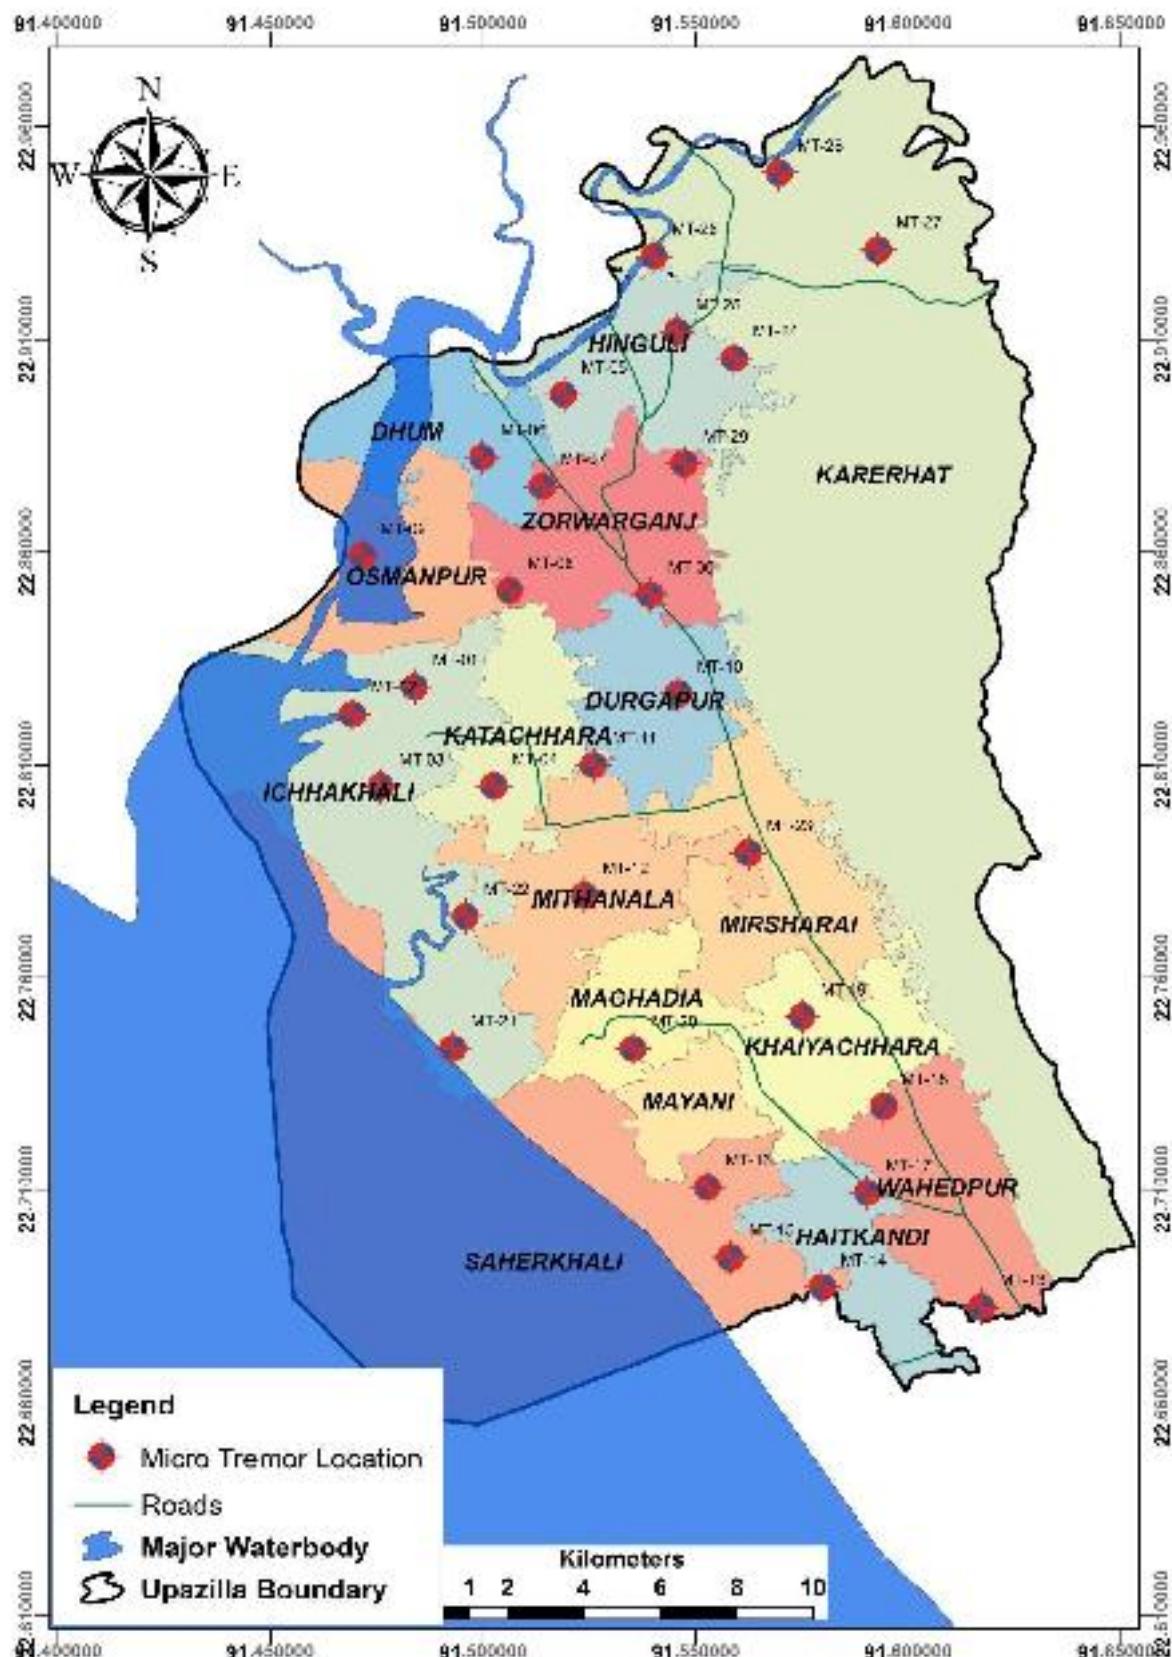



Figure 3.4 Location for single Microtremor survey

Table-3.5 Location of single Microtremor survey

MT_ID	Location	Lat	Long
MT-01	Ichakhali, Shahebjir Nagar	22.828280	91.483920
MT-02	Vaggoni, Ichakhai	22.821860	91.469320
MT-03	Susham Khal, Ichakhai	22.804900	91.475900
MT-04	Bariakhali, Katachhara	22.805010	91.502565
MT-05	Ganakchara, Dhum	22.897080	91.518910
MT-06	Moulavi bazaar, Dhum	22.882330	91.499810
MT-07	Naherpur, Dhum	22.875480	91.513950
MT-08	Shahedpur, Zorwarganj	22.851020	91.506260
MT-09	Azampur, Osmanpur	22.859180	91.471640
MT-10	Harihpur, Durgapur	22.826680	91.546010
MT-11	Massapukur, Kattachara	22.809930	91.526050
MT-12	Middle Mithanala, Mithanala	22.779276	91.523874
MT-13	Mohalonga, Wahedpur	22.676150	91.614850
MT-14	Uttar bogachotor, Saherkhali	22.683210	91.578450
MT-15	Dhumkhali, Saherkhali	22.694140	91.558220
MT-16	Abdul Qaium Road, Shaherkhali	22.710640	91.552810
MT-17	Kaochua, Haitkandi	22.709420	91.590450
MT-18	Gasbaria, Khaiyachhara	22.729670	91.594240
MT-19	Sayedali, Khaiyachhara	22.750810	91.575130
MT-20	Jafrabad, Maghadia	22.743280	91.535330
MT-21	Chorsorod, Maghadia	22.743330	91.492900
MT-22	Rahmatabad, Ichhakhali	22.774370	91.495900
MT-23	Mirsharai	22.789326	91.562447
MT-24	Islampur, Hinguli	22.905580	91.559140
MT-25	Taltola, Hinguli	22.911810	91.545650
MT-26	Katagong, Karerhat	22.929550	91.540200
MT-27	Nolkho, Karerhat	22.931180	91.592860
MT-28	West Olinagar, Karerhat	22.949200	91.569680
MT-29	Khilmurali, Zorwargonj	22.880850	91.547340
MT-30	Mohanagar, Zorwargonj	22.850040	91.539260

To meet the project demand thirty Single Microtremor (MT) surveys were carried out throughout the project area to derive the fundamental/peak period. This information is crucial to avoid building resonance effect during an earthquake. It is found that the peak period ranges from 0.6 to 2.5 second. There exists a rule of thumb that the fundamental period of the buildings should not coincide with the peak period of the ground surface and building's fundamental period is ( $N/10$ ), where  $N$  is number of storey. Therefore, each and every peak period value can be utilized for the corresponding building height. However, the unions located to the south of Mirsharai Upazila mostly characterized by high peak period value (Figure 3.5). Moreover, this information of peak period will be further correlated with the

Spectral Acceleration value to be derived from Probabilistic Seismic Hazard Assessment to propose the suitable building height for the project area.

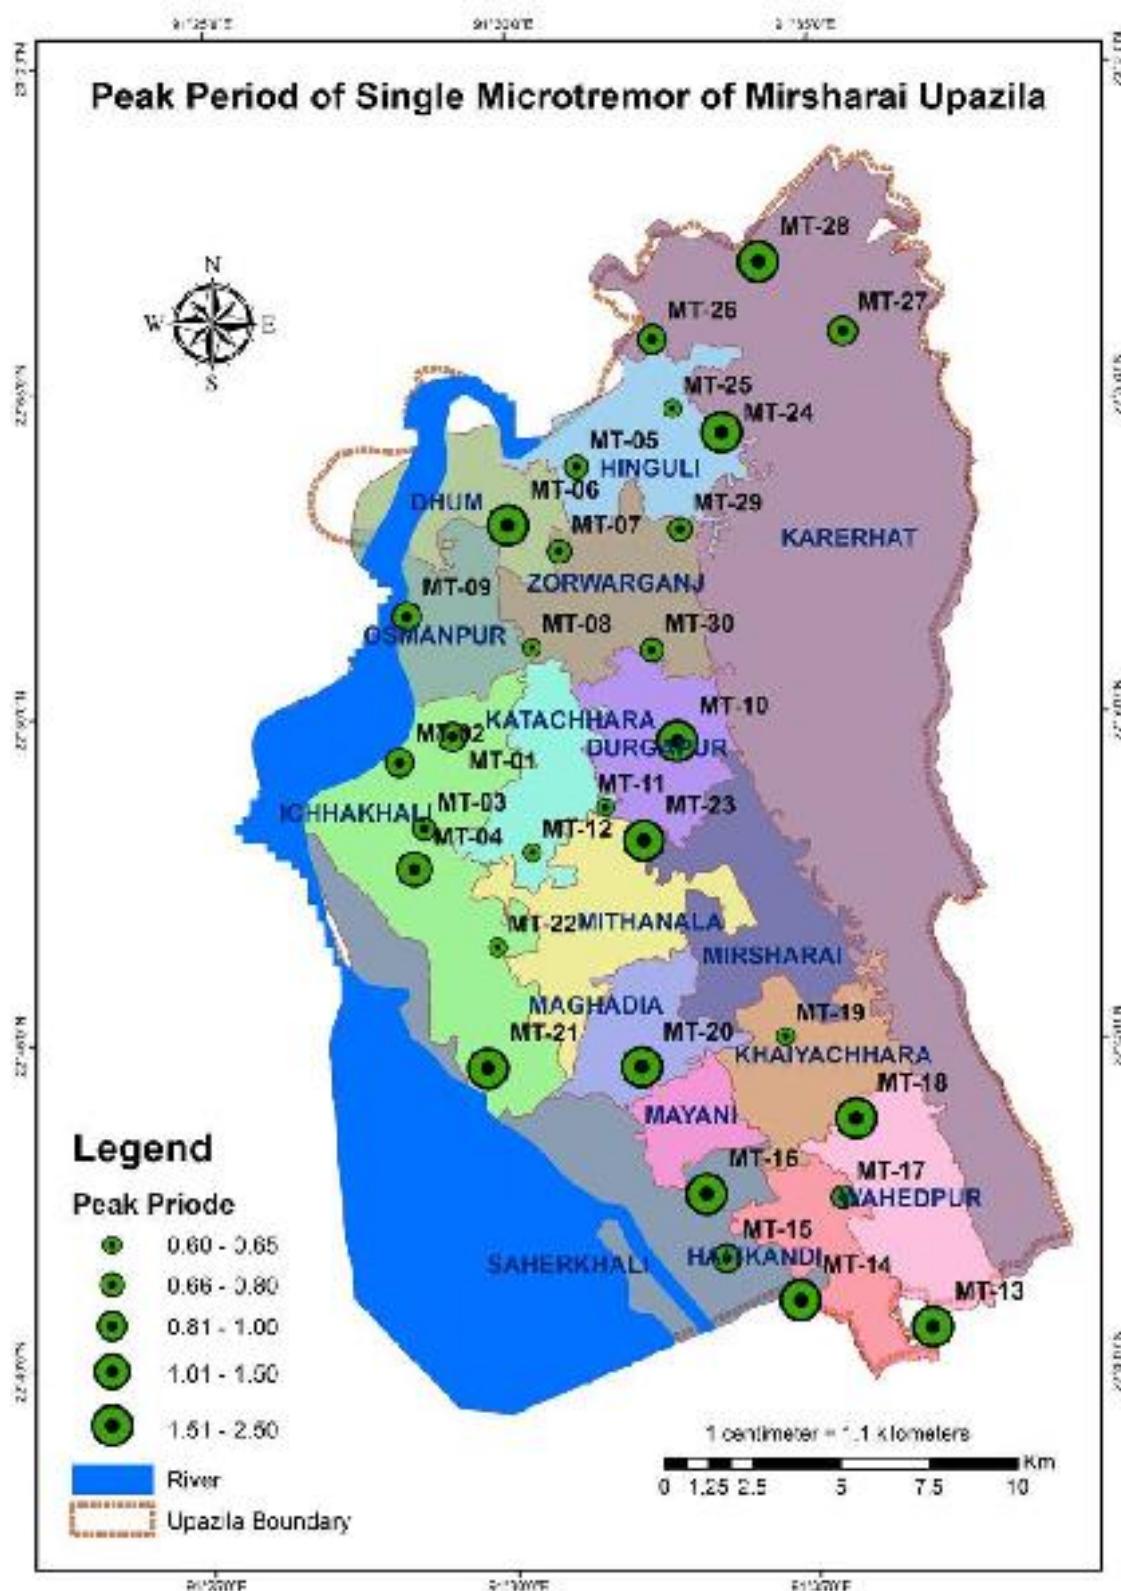

**Figure 3.5 Peak Periods for Single Microtremor of Mirsharai Upazila**

### 3.2. GEOTECHNICAL INVESTIGATIONS

To ensure safety of human beings and materials, geotechnical investigations have become an essential component of every construction, it includes a detailed investigation of soil strength, composition, water content, and other important soil characteristics. The standard penetration tests were conducted in order to know subsurface geological conditions. The borings with SPT were carried out at 85 points at Mirsharai Upazila Figure-3.6.

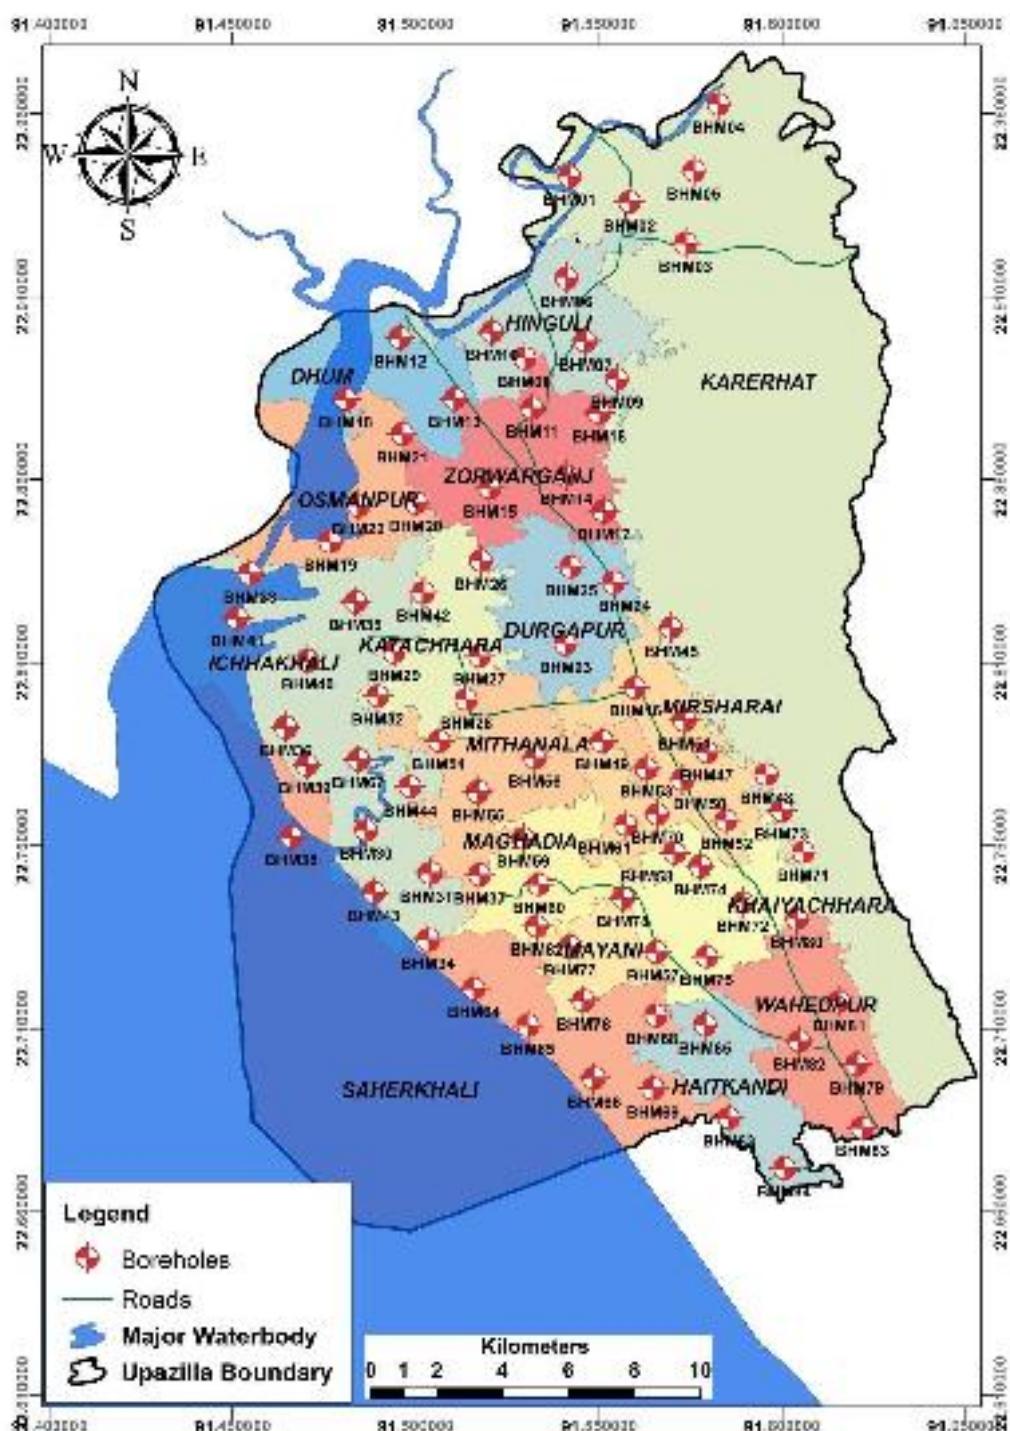


Figure 3.6 Borehole Location for SPT test

### 3.2.1. Standard Penetration Test (Spt) Log Analysis And Interpretation

SPT is a common in-situ testing method used to determine the geotechnical engineering properties of subsurface soils. It was developed in the late 1920s and has been used extremely in North and South America, the United Kingdom, Japan, and elsewhere. Because of this long record of experience, the SPT is well-established in engineering practice. It is performed inside exploratory boring using inexpensive and readily available equipment, and thus adds little cost to a site characterization program.

All the borings has to be conducted and preparation of field bore log by visual classification has to be done in the presence of the experienced technical personnel. The borehole records have to be taken that include soil type, nature of sample, soil moisture content and consistency, SPT blow counts (N Value), ground water observation and apparent origin (fill, alluvium, recent sediments, etc.) and daily field logs have been prepared. The bore locations are given in following table-3.6 and the geotechnical activities and borehole log are enclosed in the Appendix G and H.

Table-3.6 Location of Borehole for SPT test

Borehole_ID	Location	Latitude	Longitude
BHM01	West Joar Roshidia Govt. Primary School	22.94282	91.54206
BHM02	Choturua, Ward-1, Korerhat	22.93579	91.55832
BHM03	Giamara gram, Bagan road, Korerhat	22.92456	91.57372
BHM04	Bishowtila Jame mosque, Olinogor, Korerhat	22.9626	91.58258
BHM05	Poshchim olinogor, Korerhat	22.94435	91.5759
BHM06	Ajomnogor Community Clinic, Hinguli	22.91506	91.54119
BHM07	Khil hinguli Govt. Primary School	22.89774	91.5464
BHM08	Jamalpur, Baraiarhat Pourashava	22.89317	91.5297
BHM09	East Mehedi Nagar (Forrest Office)	22.88751	91.55489
BHM10	West Hinguli, Gonokchora	22.90032	91.52085
BHM11	Imampur Titabot tola Furkania Madrasha	22.87949	91.53175
BHM12	Bono Chowdhury Jame Mosque, Mobarokgun, Dhoom	22.89871	91.49581
BHM13	Banglabazar, Shantor road, Dhoom	22.88204	91.51064
BHM14	163 no. Fayezullah master Govt. Primary School	22.86107	91.54115
BHM15	Alhaz Bodiu alam Chowdhury Govt. Primary School	22.85769	91.52032
BHM16	Khil murari, ward no. 5, Zorargonj	22.8783	91.55009
BHM17	Shonapahar, murari, Zorargonj	22.85143	91.55145
BHM18	Guccho gram M.A. Haider Primary School, Osmanpur	22.88176	91.4809
BHM19	Bashkhali, Veribadh, Muhuri Project, Osmanpur	22.84304	91.47659
BHM20	39 no. East Shahedpur Govt. Primary School, Azampur	22.85378	91.50001
BHM21	East Moregang Jame Mosque, Osmanpur	22.87252	91.49651
BHM22	Patacoat, Azampur, Osmanpur	22.85292	91.48433
BHM23	68 north durgapur Primary School, Varoddaj hat	22.81511	91.54094
BHM24	East Raypur Baitul Aman Jame Mosque, Durgapur	22.83193	91.55396
BHM25	Jaforer Poultry Farm, Choitonner Hat, Durgapur	22.83615	91.54239
BHM26	Tetuiana Nath Para, Durgapur	22.83779	91.51776

BHM27	Abdus Sattar Bhuiyar Hat Govt. Primary school, Kata chora	22.81188	91.51746
BHM28	Bamon Shundor Govt. Primary School, Kata Chora	22.79988	91.51379
BHM29	Ahmed Ali Miar Hat Govt Primary School, Kata Chora	22.81297	91.49413
BHM30	Gudammar tek, Ichakhali	22.76421	91.48643
BHM31	Char shorot Sharbojonin Charnatia Durga Mondir, Ichakhali	22.75251	91.50399
BHM32	Jobayeda Islam Nurani Islamia madrasha	22.80081	91.48951
BHM33	Muhuri Project, Sluice Gate, Ichakhali	22.83434	91.45464
BHM34	Bamonshundor Forrest Bit Office, Shaherkhali	22.7343	91.50339
BHM35	Vanguni Bazar Baitunnur Jame Mmosque, Ichakhali	22.82661	91.48335
BHM36	Chunumijar Tek, Ichakhali	22.79233	91.46452
BHM37	94 no. Hasim Nagar Govt. Primary School,	22.75204	91.51743
BHM38	Ichakhali Economic Zone Office, Ichakhali	22.76242	91.46612
BHM39	Lodiakhali, Ichakhali	22.78207	91.47032
BHM40	Sony Mijer tek, Tekerhat Bazar,Ichakhali	22.81053	91.47058
BHM41	Ichakhali Economic Zone, Ichakhali	22.82266	91.44786
BHM42	Kazigram govt. Primary School, Ichakhali	22.82931	91.50229
BHM43	Rajamiar Farm, Char Shorot, Ichakhali	22.74718	91.48854
BHM44	Rahmatabad, Ichakhali	22.77602	91.49851
BHM45	Mohamaya Eco Park, Durgapur	22.81944	91.56983
BHM46	Mithachora Bazar , Mirshorai	22.80319	91.5599
BHM47	South Talbaria, Mirshorai	22.78553	91.57944
BHM48	East Ambaria, Mirshorai	22.7794	91.59575
BHM49	Ora Kazi Mijibari Jame Mosque, Mirshorai	22.78863	91.55093
BHM50	Mirshorai Degree College, Mirsorai	22.77792	91.57289
BHM51	North Talbaria Govt. Primary School, Mirshorai	22.79426	91.57335
BHM52	Hamid Ali Jame Mosque, East Khoiachora	22.76701	91.58471
BHM53	Khankaye Latifia Madrasha, Mirshorai	22.7811	91.56298
BHM54	Rabiul Hossain Govt. Primary School	22.78867	91.50636
BHM55	Chairman Bari, West Muliyah	22.77471	91.51698
BHM56	Hazi Badiul Alam Chowdhury Govt. Primary School, Mithanala	22.78397	91.53249
BHM57	Mayani Bogla Kumar Primary School, Mayani	22.73095	91.56573
BHM58	West Khoiachora Munipara, Jame Mosque	22.758	91.57073
BHM59	3 Ghoriatola, Jame mosque, Maghadia	22.76206	91.5293
BHM60	90 no. Maghadia NC Govt. Primary School, Maghadia	22.74951	91.53351
BHM61	Sheker Taluk, Middle Maghadia	22.76571	91.55742
BHM62	Kazir Taluk Govt. Primary School, Maghadia	22.73803	91.53299
BHM63	Komor ali Union High School, Komor Ali Union Bazar	22.68562	91.58553
BHM64	Katakhali Beribadh, Shekerkhali	22.72091	91.51587
BHM65	Beri Badh, Shekerkhali	22.71091	91.53063
BHM66	North Dhoom Khali, Gazaria, Shekerkhali	22.69645	91.54869
BHM67	Ichakhali Khalpar,Ichakhali	22.78354	91.48431
BHM68	Shaherkhali High School, Shaherkhali	22.71369	91.56564
BHM69	Dhoomkhali, Shaherkhali	22.69363	91.56484
BHM70	West Gobania, Mirshorai	22.76866	91.56601

BHM71	Shonaichora, Khoiachora	22.75824	91.60582
BHM72	Morjida Masima Taluk, Borotakia	22.74442	91.58926
BHM73	Khoiachora Waterfall Road, Khoiachora	22.76957	91.59991
BHM74	Said Ali Govt. Primary School	22.75439	91.57765
BHM75	Majeda Huq High School, Mayani	22.72981	91.57939
BHM76	Shah Abdul Majid Govt. Primary School, West Mayani	22.7176	91.54582
BHM77	West Mayani Shahid Kamal Uddin Govt. Primary School	22.73242	91.54217
BHM78	13 no. Mayani Union Complex Building	22.7457	91.55657
BHM79	West Wahedpur Molla para Mosque	22.7002	91.62035
BHM80	Beltola, Wahedpur	22.74	91.604
BHM81	Sheker Taluk, Middle Maghadia	22.71732	91.61549
BHM82	Maizgao	22.70669	91.6047
BHM83	Jafrabad Govt. Primary School, Wahedpur	22.68304	91.62183
BHM84	South Baliadi Govt. Primary School	22.67191	91.60059
BHM85	Hait kandi High School	22.71106	91.57895

While boring and SPT testing, soil samples are being visually classified in the following way:

<b>Sieve</b>	<b>Soils</b>	<b>Designations</b>
+No 4 (4.76mm)	Gravel	
No.4 to No 10(2.00mm)	Coarse	Sand
No. 10 to No 40 (0.42mm)	Medium	Sand
No. 40 to No 200 (0.07mm)	Fine	Sand
No.200	Silt or Clay	

Some soil has one dominant lithology with minuscule amount of other soil type. In such cases, minor soil sample are written in the following manner with along with dominant soil type.

- |           |           |
|-----------|-----------|
| 1. Trace  | 1 to 10%  |
| 2. Little | 10 to 25% |
| 3. With   | 25 to 35% |

SPT- N value is also note down while SPT Testing. Then the collected soil samples are being cross checked with SPT-N values to ensure quality data collection.

Based on N-values, other very useful soil parameters may be obtained from the co-relation charts given by different research workers. Two such useful co-relations for cohesive and non-cohesive soils after K. Terzaghi are given below:

Table-3.7 Values of Relative Density (Dr.), Friction Angle and Unit Weight of Non-cohesive soil based on N-values

N-values	Condition	Relative Density	Angle of Internal friction (Degree)	Moist Unit Weight (Pcf)
0-4	Very Loose	0-15%	28°	70-100
4-10	Loose	15-35%	28°-30°	95-125
10-30	Medium dense	35-65%	30°-36°	110-130
30-50	Dense	65-85%	36°-41°	110-140
Over 50	Very dense	85-100%	Over 41°	> 130

Table-3.8 Values of Unconfined Compressive Strength based on N-values for Cohesive Soil (Approximate):

N-values	Condition	Unconfined Compressive Strength (Tsf)
Below 2	Very soft	Below 0.25
2-4	Soft	0.25-0.50
4-8	Medium stiff	0.50-1.00
8-16	Stiff	1.00-2.00
16-32	very stiff	2.00-4.00
Over 32	Hard	over 4.00

In the above table the shear strength of cohesive soil is equal to  $\frac{1}{2}$  of unconfined compressive strength and the angle of shearing resistance is equal to zero. It should be remembered that the co-relation for cohesive soil is not always much reliable.

*The litholog are already written down in a standard format and has been attached in the appendix H.*

### 3.2.2. Subsurface 3D model of different layers through Geotechnical investigation

According to  $250\text{m} \times 250\text{m}$  grid pattern, Standard penetration test locations are selected and drilling for identifying the geological characteristic of sub-surface soft sedimentary rocks. Description of different layer of the soil, its sedimentary characteristics, structure, and lithology are reflected in 3D model. Engineering properties of different soil layer: SPT value, soil strength and foundation layer etc are also being described. Computing all the results of soil properties and geotechnical properties preparation of 3D model for sub surface information of different layers of the area can be done by using GIS.


Lithological succession encountered in the boreholes reveals that geologically the study area is very complex as the eastern part is high terrace zone on the other hand western part is flat land area which finally ended up in bay of bangle. The borelogs encompasses eight distinct lithofacies, denoted as layers1 to layer8 and each layer has distinct lithological characteristics and standard penetration test blow counts (SPT-N) as described in Figure-3.7a.

a.


#### Lithological Description

- Layer-1: Brownish Gray Soft to Stiff Clayey SILT/Silty CLAY with Very Fine Sand
- Layer-2: Gray Loose to Medium Dense Very Fine to Fine SAND with Silt
- Layer-3: Gray Medium Dense Medium to Fine SAND
- Layer-4: Brown to Gray Medium to Very Stiff Clayey SILT with Very Fine Sand
- Layer-5: Brown to Gray Medium Dense to Very Dense Medium to Fine SAND
- Layer-6: Brown to Gray Very Stiff Clayey SILT
- Layer-7: Reddish Brown to Gray Dense to Very Dense Medium to Fine SAND
- Layer-8: Brownish Gray Very Hard CLAY/SHALE

b.

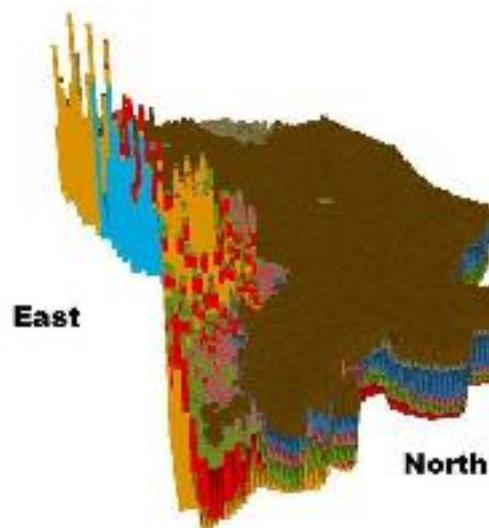

c.

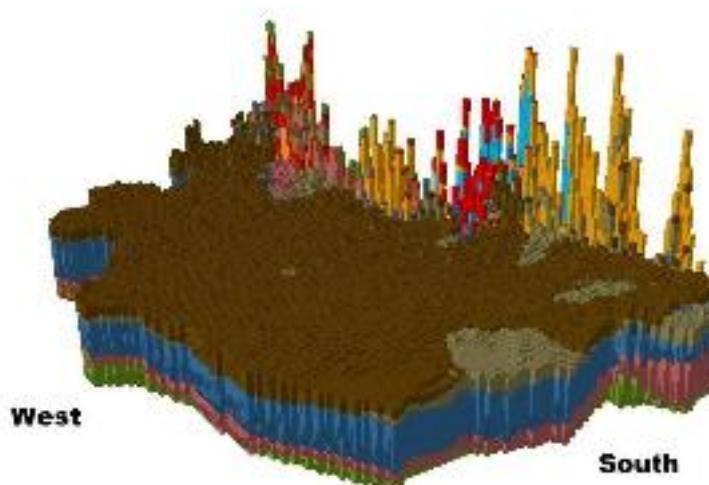

**Figure 3.7 (a) Legend and Lithologic characteristic of subsurface of Mirsharai Upazila; (b) Subsurface 3-D model showing Northeastern part; (c) Subsurface 3-D model in Southwestern direction**

Subsurface 3D model was prepared showing Northeastern part and along Southwestern direction using ArcGIS to elucidate the subsurface geological conditions of the study area as shown in Figure 3.7 b & c respectively. All 85 boreholes of 30m depth were carefully examined to delineate the spatial distribution of the subsurface lithological units of the area.

Among 8 layers; layer 1 to layer 5 is mostly present at the flat landed areas and layer 6 to layer 8 is mainly present at hilly regions of the study area. From the Figure 3.7 b & C, it can observe that Layer 1 is present at the top of the study area. However the layer is absent at the hilly regions and southern part of the flat lands of study area. A thin layer of layer 2 is present almost throughout the flat landed areas of the study area. Layer 3 which is considered as the foundation layer is the thickest layer within the flat land zone and thickness increases gradually toward southwestern part of the area. Thickness of Layer 4 gradually decreases toward western part of the study area. Layer 5 is also considered as foundation layer where layer 3 is absent especially at Karerhat Union. Thickness of the layer gradually increases toward north of the area. Layer 6 is discretely present within the area and thickness of the layer increases toward northeastern part of the area. Layer 7 and 8 mainly encountered at the eastern part of the area. Both the layers are present within the hilly regions of the study area and could not be encountered within the 30m depth zone of flat land regions. Thickness of layer 7 increases abruptly toward northeastern part of the area and the thickness of layer 8 increases abruptly toward eastern part of the area.

## 4. CONCLUSION

Earthquakes are related to faulting and tectonic instability of an area. The overall tectonics of Bangladesh and adjoining region is conducive for the frequent and recurring earthquakes. The geo tectonic setting of the country is very active seismically. These are Himalayan Arc, Shillong Plateau and Dauki fault system in the North, Burmese arc and accretionary wedges in the East, Naga-Disang-Haflong thrust zone in the Northeast. Threatened earthquake disaster inside Bangladesh may be expected from these active seismic zones outside the national boundary.

Seismically, Bangladesh is divided into three zones i.e. less risk zone (zone 1), moderate risk zone (zone2) and highly risk zone (zone3). Mirsharai Upazila at Chittagong district of Bangladesh is situated in zone 2. Besides these, this area is located between Arakan Megathrust and Sagaing fault. So, Mirsharai is moderately vulnerable to earthquake. To propitiate the risk of earthquake some initiatives have been taken by the concerned authorities. One of the projects works named “Geological Study And Seismic Hazard Assessment Under Preparation of Development Plan for Mirsharai Upazila, Chittagong District: Risk Sensitive Landuse Plan (MUDP)” which has been initiated by Urban Development Directorate.

In this project work, both the geophysical and geotechnical investigations have been conducted. The duration of the project is six months (19<sup>th</sup> December, 2017 to 18<sup>th</sup> June, 2018). In geotechnical survey 85 numbers of SPT boring (up to 30m) has been conducted in the field and the soil samples also collected from the field and laboratory tests are going on, which will complete with in few weeks. And in geophysical Survey, fifteen (15) PS Logging, twenty (20) MASW, and thirty (30) Microtremor (single array) have been investigated by using some sophisticated instruments. However, subsurface 3D model of different layers has been developed through Geotechnical investigation, which will be updated eventually by integrating other data set. Vs30 value has been determined from MASW and downhole seismic survey, which will compile with other test (velocity from N-value) values. Finally, by using these geotechnical and geophysical data, geological study and seismic hazard assessment will be prepared.

## 5. REFERENCES

- i. Anbazhagan P, Sitharam TG. Mapping of average shear wave velocity for Bangalore region: a case study. *Journal of Environmental & Engineering Geophysics* 2008;13(2):69–84.
- ii. Anbazhagan P, Sitharam TG. Seismic microzonation of Bangalore. *Journal of Earth System Science* 2008; 117(S2):833–52.
- iii. Anbazhagan P, Sitharam TG. Spatial variability of the weathered and engineering bed rock using multichannel analysis of surface wave survey. *Pure and Applied Geophysics* 2009;166(3):409–28.
- iv. Auld, B., 1977, Cross-Hole and Down-Hole Vs by Mechanical Impulse, *Journal of Geotechnical Engineering Division, ASCE*, Vol. 103, No. GT12, pp. 1381-1398
- v. Banglapedia 2015 - [http://en.banglapedia.org/index.php?title=Dohar\\_Upazila](http://en.banglapedia.org/index.php?title=Dohar_Upazila)
- vi. Kitsunezaki. C. ,N. Goto, Y. Kobayashi., T. Ikawa, M. Horike, T. Saito, T. Kurota, K. Yamane, and K. Okuzumi, 1990, Estimation of P- and S- wave velocities in Deep Soil Deposits for Evaluating Ground Vibrations in Earthquake, *SIZEN-SAIGAI-KAGAKU*,9-3,1-17 (in Japanese).
- vii. Ludwig, W.J., Nafe, J.E., and Drake, C.L., 1970, Seismic refraction, in *The Sea*, A.E. Maxwell (Editor), Vol. 4, Wiley-Interscience, New York, pp. 53-84
- viii. Miller RD, Xia J, Park CB, Ivanov J. Multichannel analysis of surface waves to map bedrock. *The Leading Edge* 1999;18(12):1392–6.
- ix. Okada, H., 2003, The microtremor survey method, *Society of Exploration Geophysicist, Tulsa*
- x. Park CB, Miller RD, Xia J. Multi-channel analysis of surface waves. *Geophysics* 1999; 64(3):800–8.

## 6. APPENDICES

Appendix A: Photographic Representation of MASW Survey Work

Appendix B: Multi-channel Analysis of Surface Wave (MASW) Test Results and Graphs

Appendix C: Photographic Representation of P-S Wave Velocity Logging Survey Work

Appendix D: P-S Wave Velocity Logging Test Results and Graphs

Appendix E: Photographic Representation of Microtremor Survey Work

Appendix F: Microtremor Test Results and Graphs

Appendix G: Photographic Representation of Geotechnical Survey (Borehole Logging) Work

Appendix H: Geotechnical Logs/ Borehole Logging Test Results and Graphs

## APPENDIX A: PHOTOGRAPHIC REPRESENTATION OF MASW SURVEY WORK





**MASW Serial No.- MASW-04**  
**Location: Naherpur, Dhum Union**  
**Coordinates: Lat-22.879295 Long- 91.505672**



**MASW Serial No.- MASW-05**  
**Location: Khilmurali, Jorawargonj**  
**Coordinates: Lat-22.8800096 Long- 91.552098256**



**MASW Serial No.- MASW-06**  
**Location: Mohamaya Lake Gate, Mirshorai**  
**Coordinates: Lat-22.819062 Long- 91.567814**



**MASW Serial No.- MASW-07**  
**Location: Temohoni, Katachara Union**  
**Coordinates: Lat-22.84534 Long- 91.506941**



**MASW Serial No.- MASW-08**  
**Location: UttarKatachara Union**  
**Coordinates: Lat-22.82728021Long- 91.520913551**



**MASW Serial No.- MASW-09**  
**Location: Veribadh, Ichakhali**  
**Coordinates: Lat-22.783081 Long- 91.469953**



**MASW Serial No.- MASW-10**

**Location: BEZA, Ichakhali**  
**Coordinates: Lat-22.75094 Long- 91.48756**



**MASW Serial No.- MASW-11**

**Location: Muhuri Project, Veribadh**  
**Coordinates: Lat-22.843563 Long- 91.47481**



**MASW Serial No.- MASW-12**

**Location: Mirshorai College, Mirshorai**  
**Coordinates: Lat-22.77799 Long- 91.57322**



**MASW Serial No.- MASW-13**  
**Location: BishwoDarbar, Amantola**  
**Coordinates: Lat-22.794934 Long- 91.551293**



**MASW Serial No.- MASW-14**  
**Location: Tegoria, Magadia**  
**Coordinates: Lat-22.765763 Long- 91.530332**



**MASW Serial No.- MASW-15**  
**Location: Moddhom Magadia Miabari, Magadia**  
**Coordinates: Lat-22.74429 Long- 91.54198**



**MASW Serial No.- MASW-16**  
**Location: Veribadh, Saherkhali**  
**Coordinates: Lat-22.70568 Long- 91.5403**



**MASW Serial No.- MASW-17**  
**Location: BamansundarKhal, Shaherkhali, BEZA**  
**Coordinates: Lat-22.733001 Long- 91.50586**



**MASW Serial No.- MASW-18**  
**Location: N Hatkumli, Joberhazi Road, Haitkandi**  
**Coordinates: Lat-22.72324 Long- 91.57393**





**MASW Serial No.- MASW-19**  
**Location: ChotokamalDaho, Kankir hat bazar road, Wahedpur**  
**Coordinates: Lat-22.70142 Long- 91.61302**





**MASW Serial No.- MASW-20**  
**Location: Monir hut, East HaitKandi**  
**Coordinates: Lat-22.70559 Long- 91.58147**


## APPENDIX B: MULTI-CHANNEL ANALYSIS OF SURFACE WAVE (MASW) TEST RESULTS AND GRAPHS

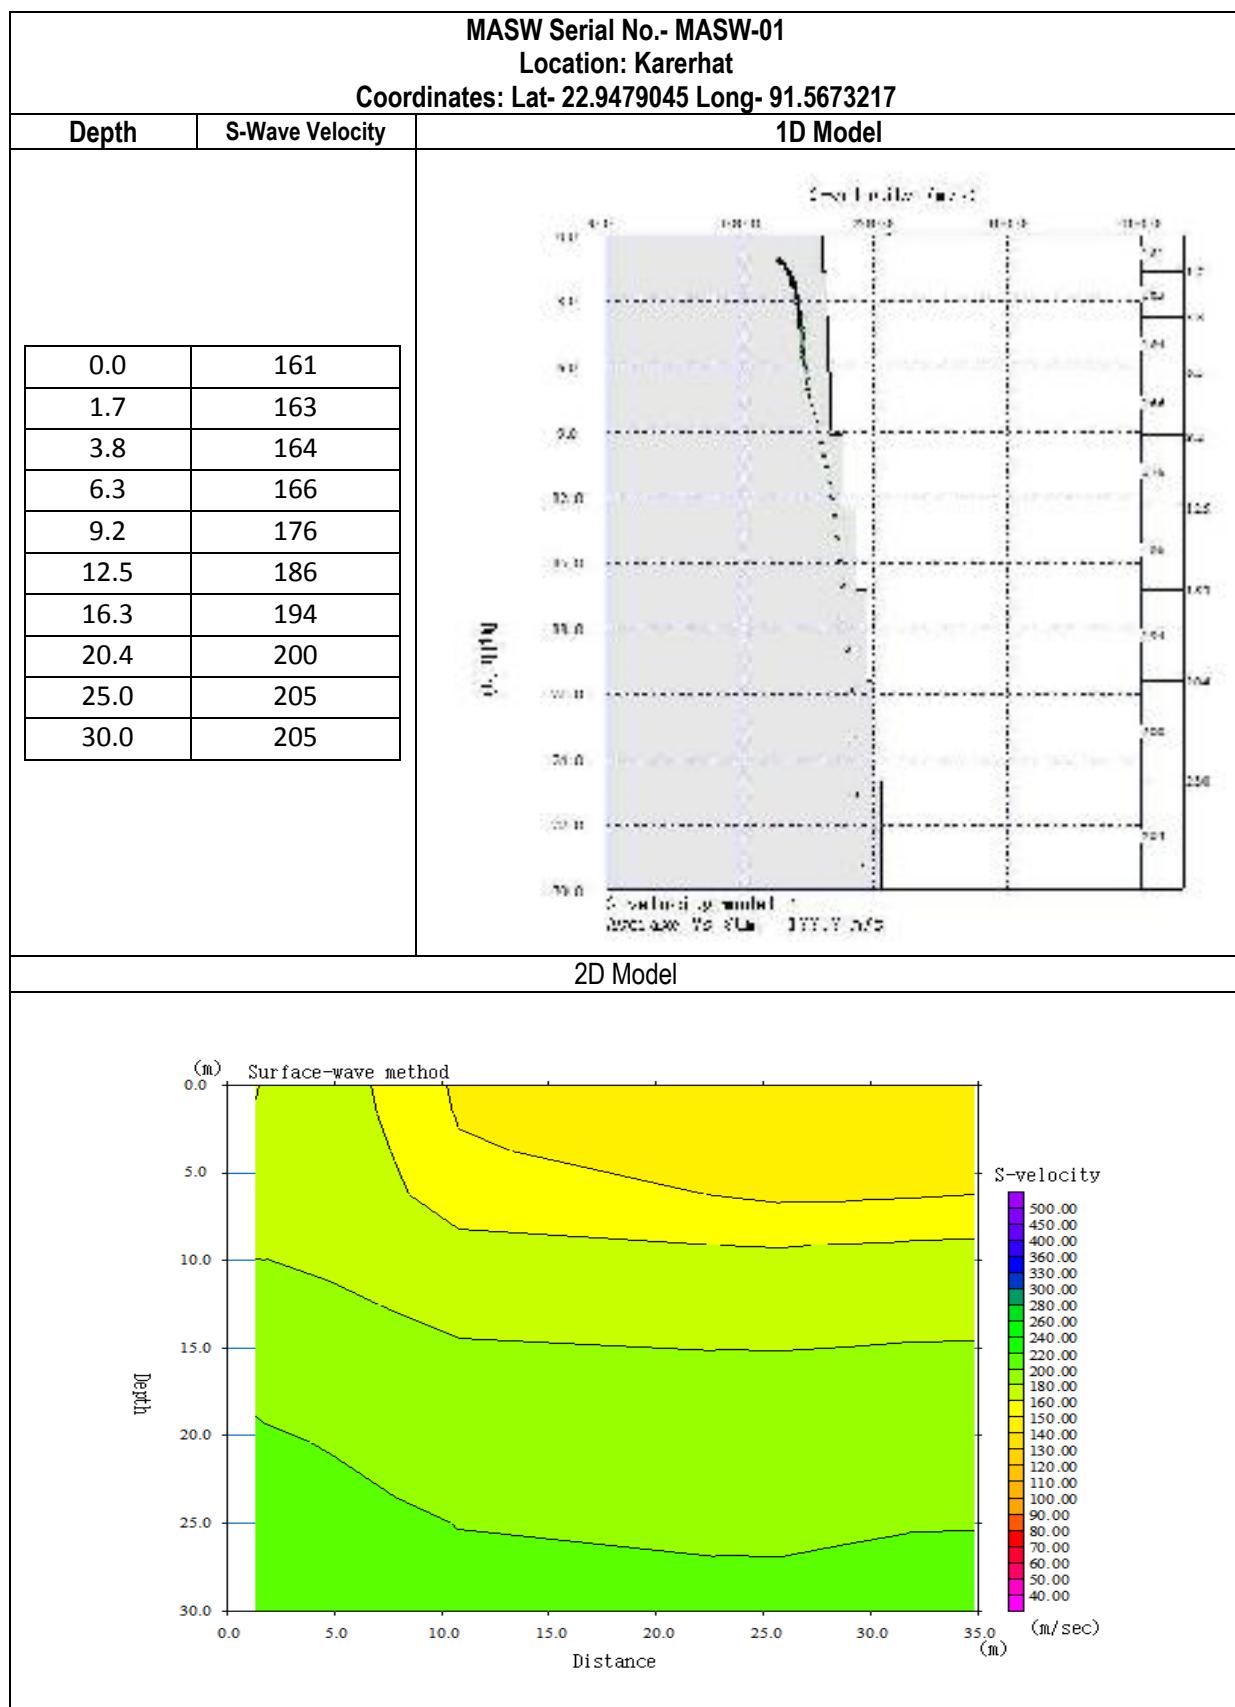


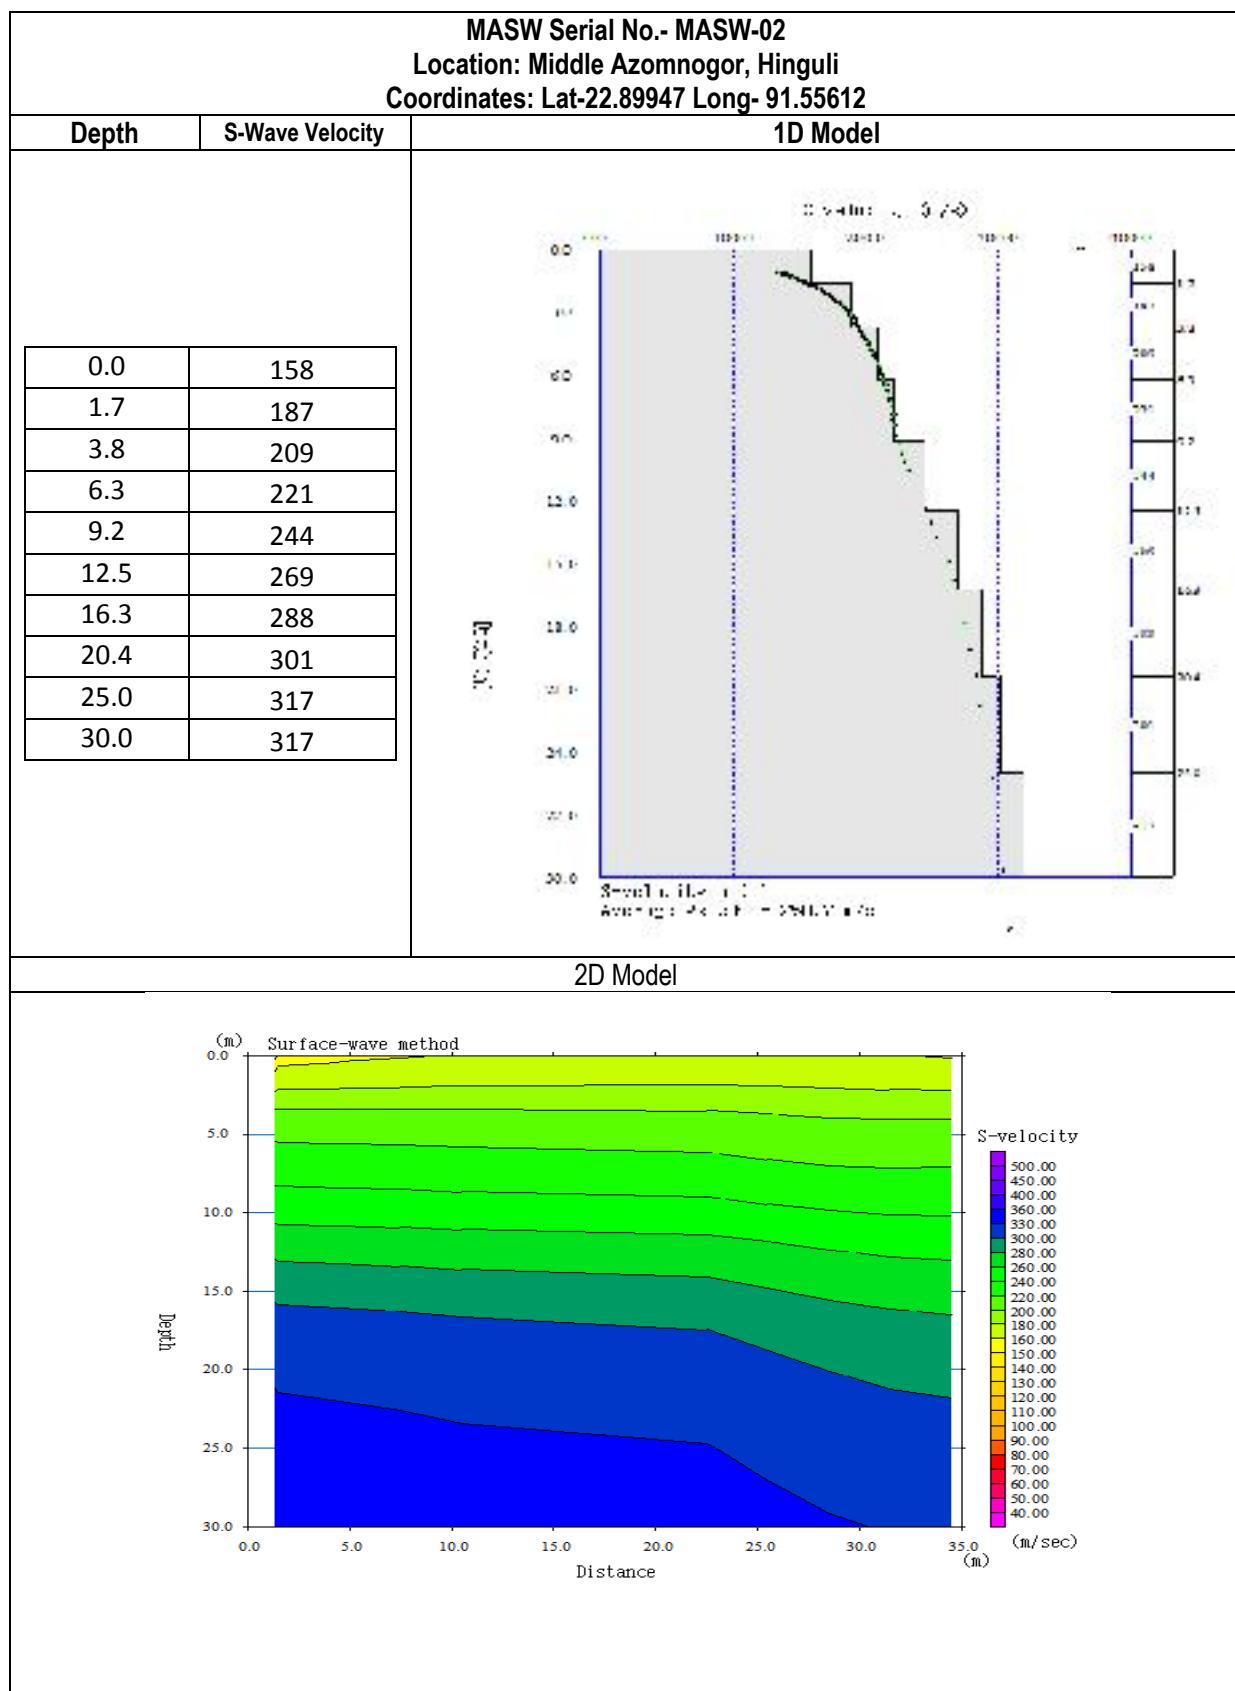

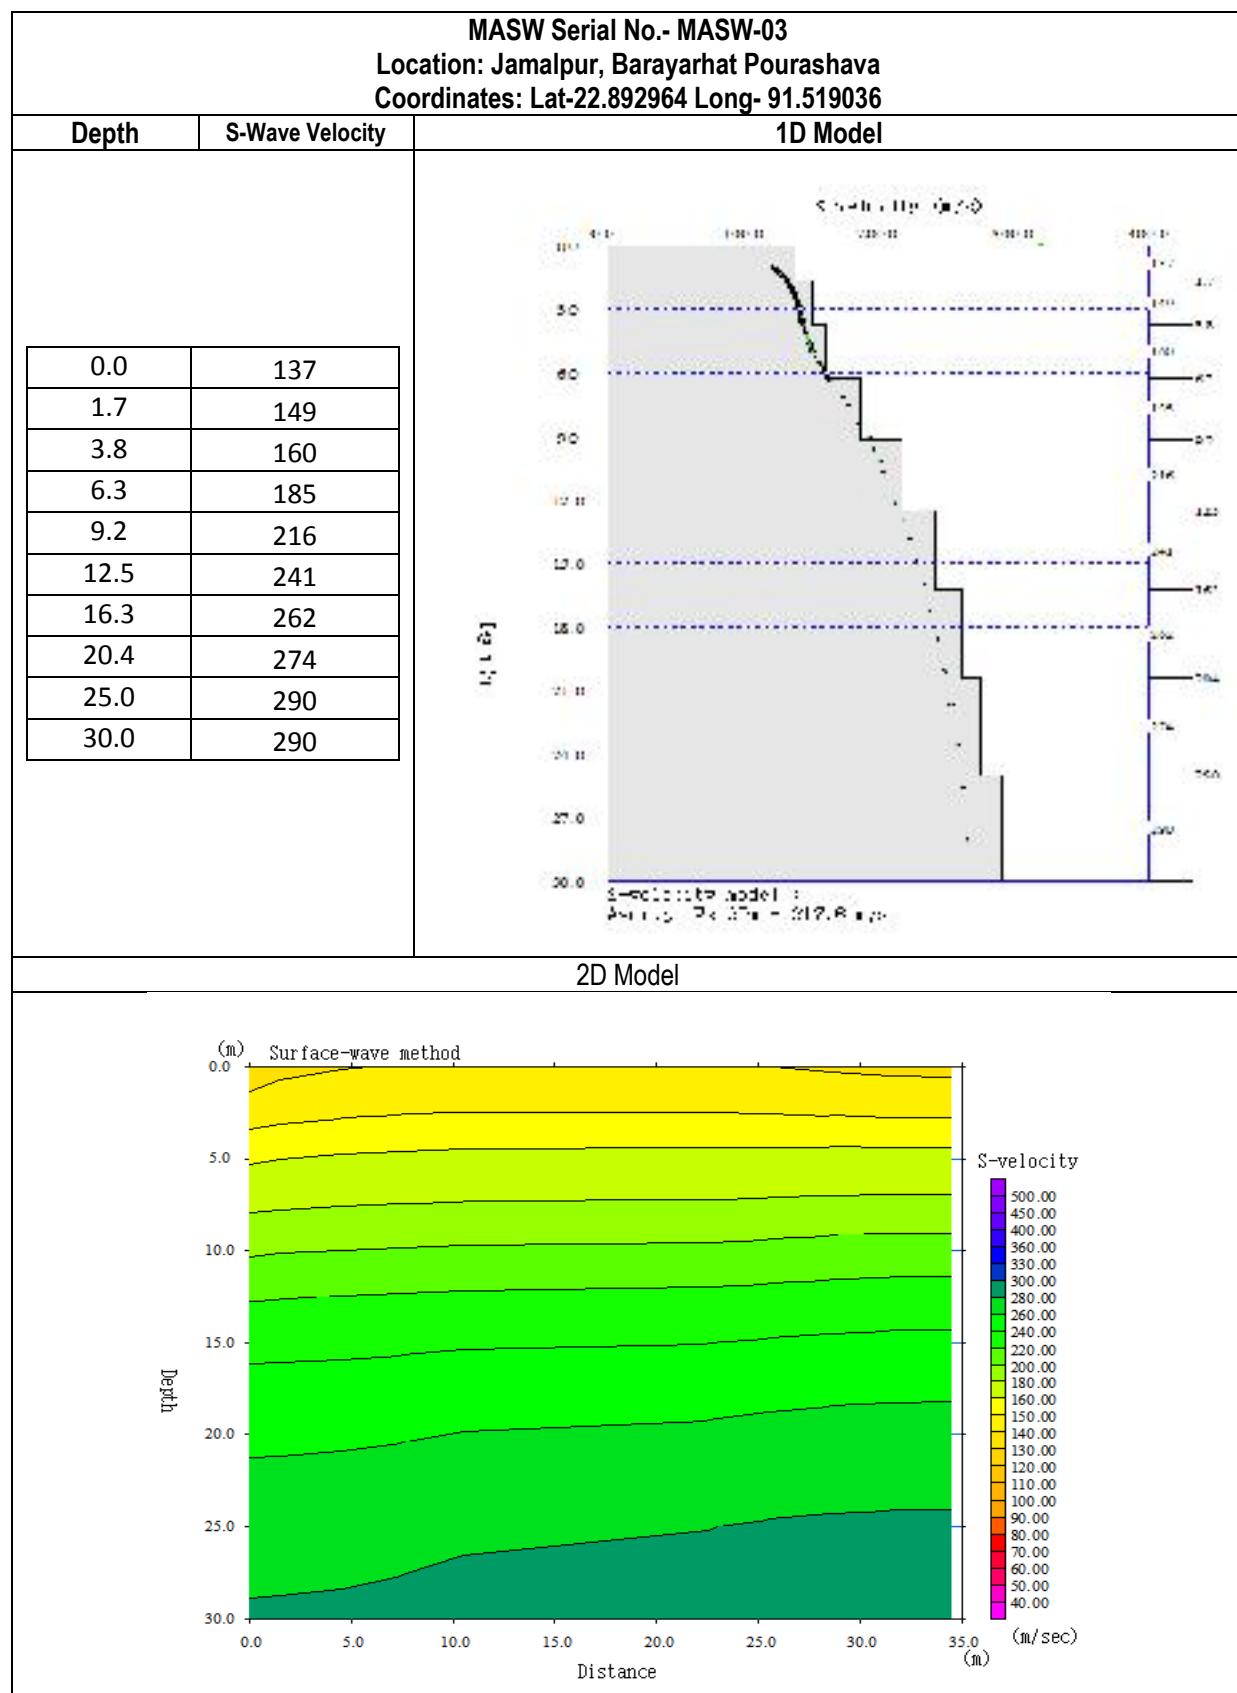


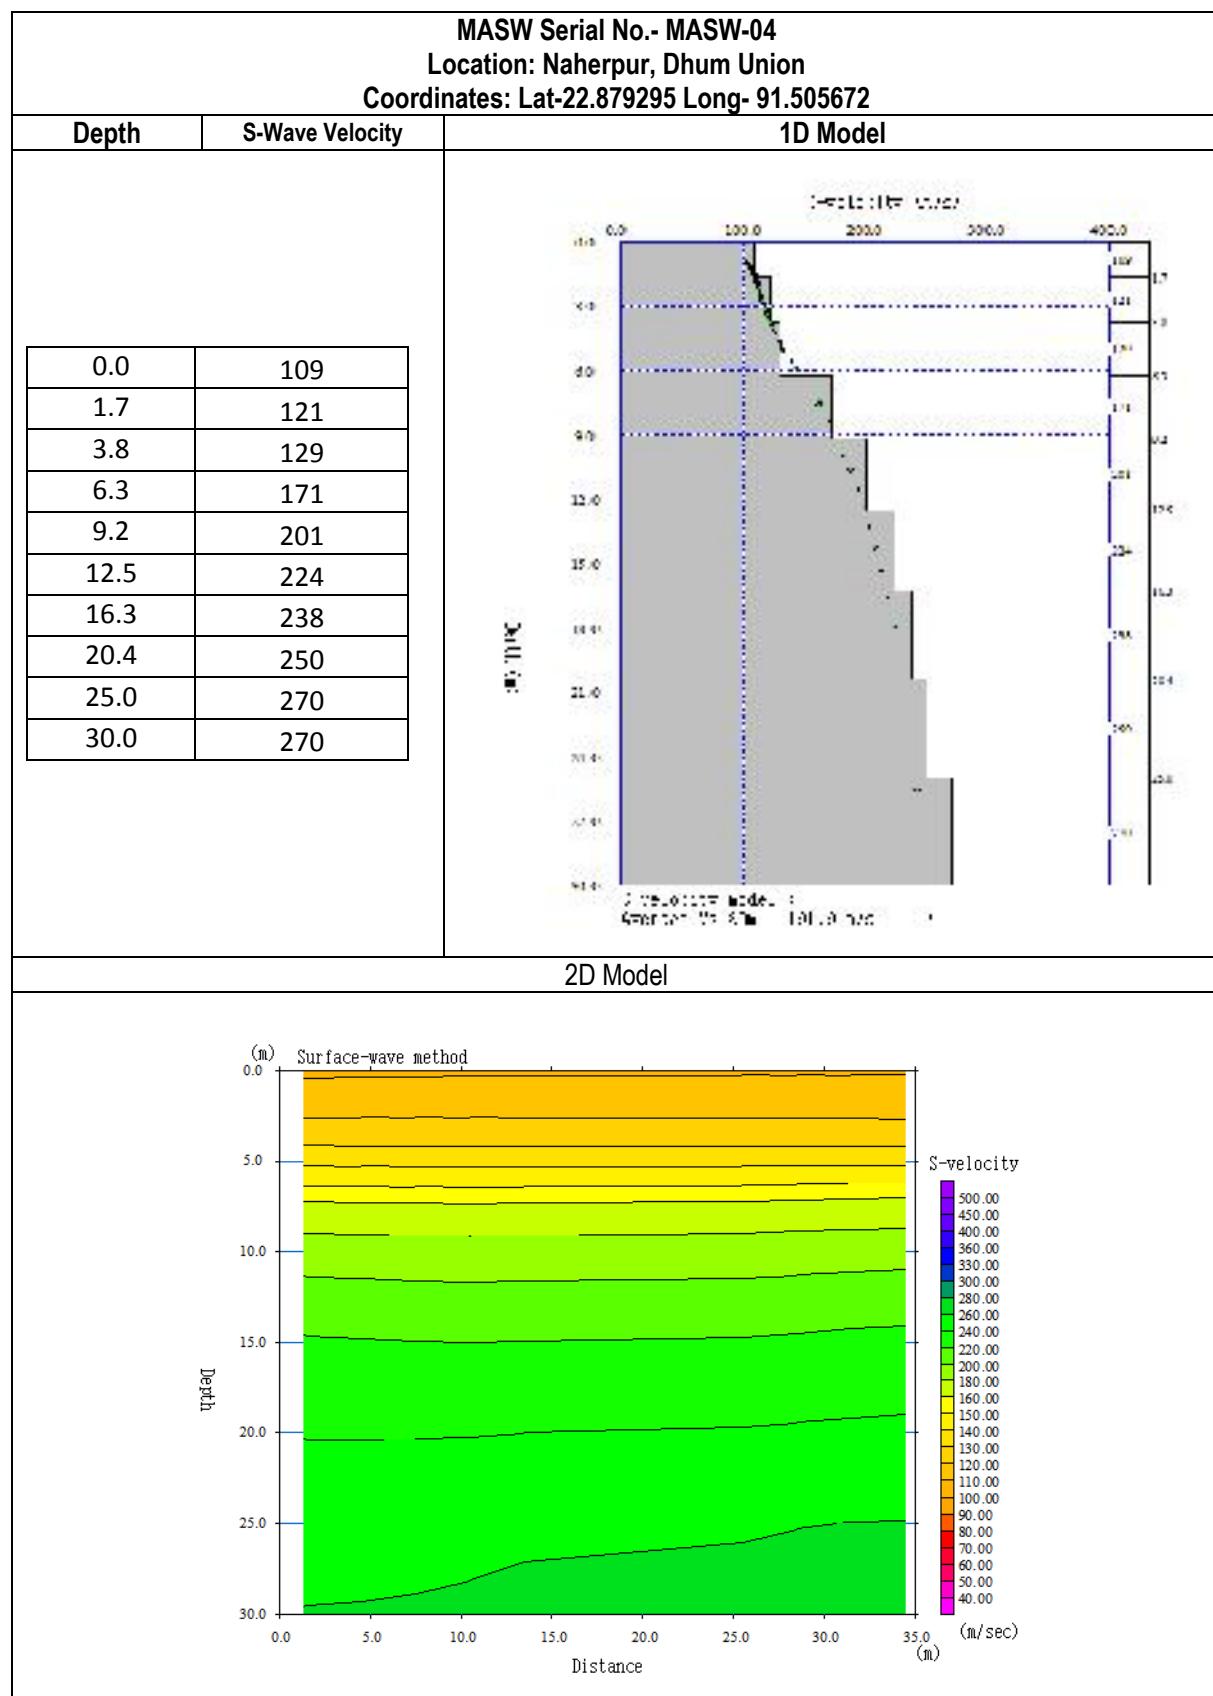


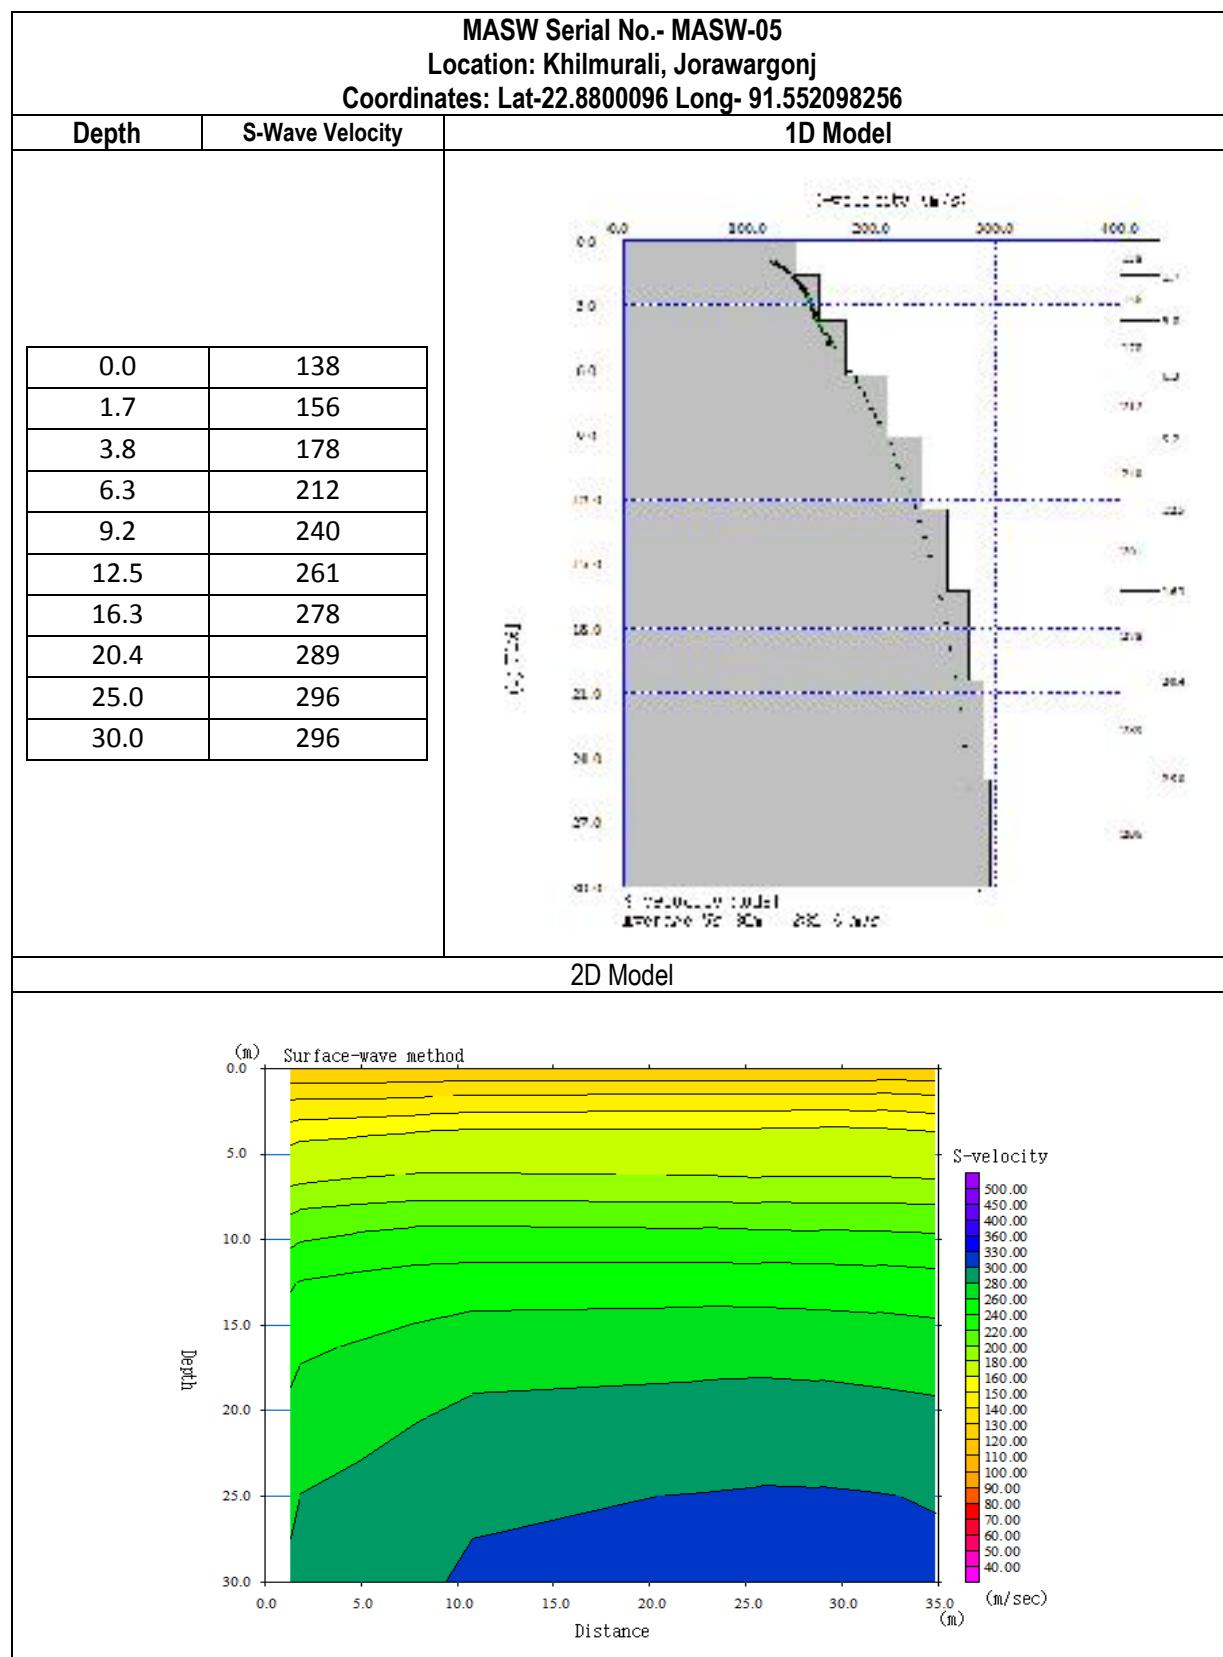

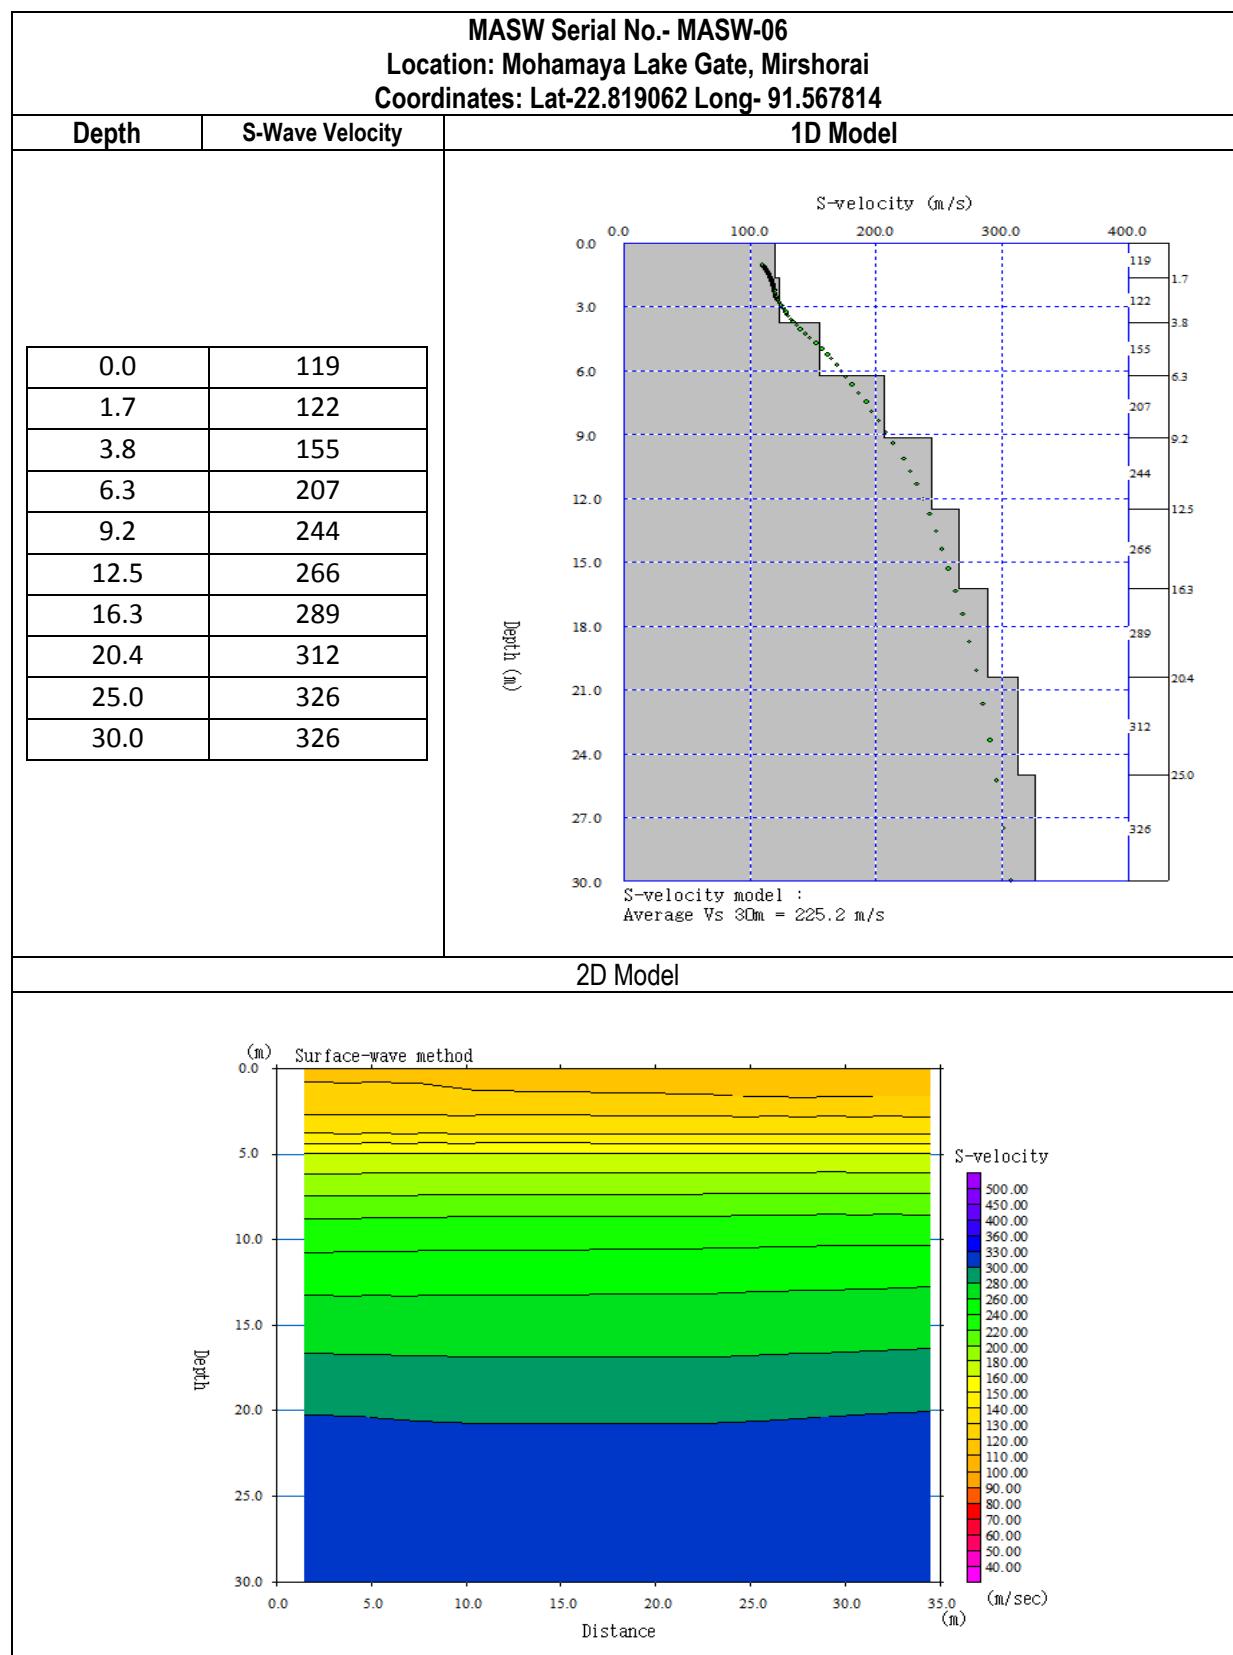



**MASW Serial No.- MASW-07**  
**Location: Temohoni, Katachara Union**  
**Coordinates: Lat-22.84534 Long- 91.506941**

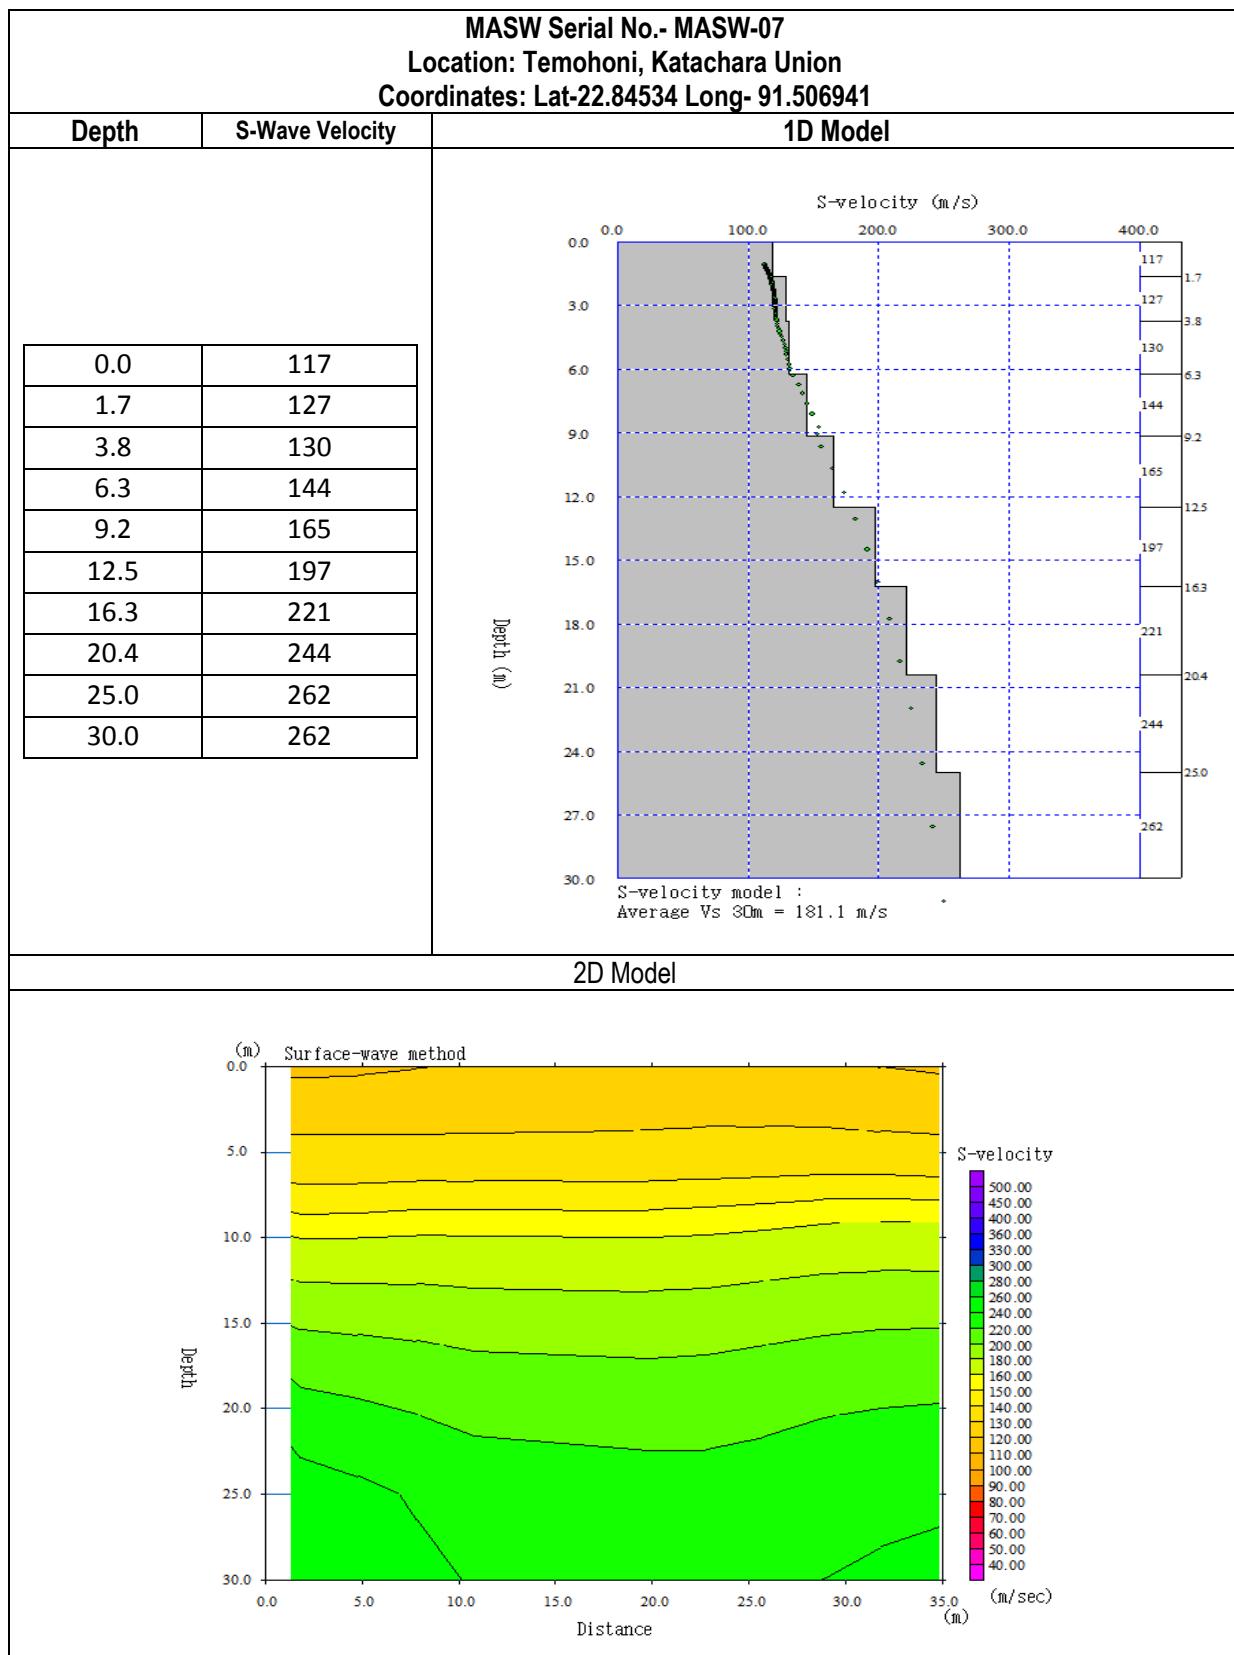

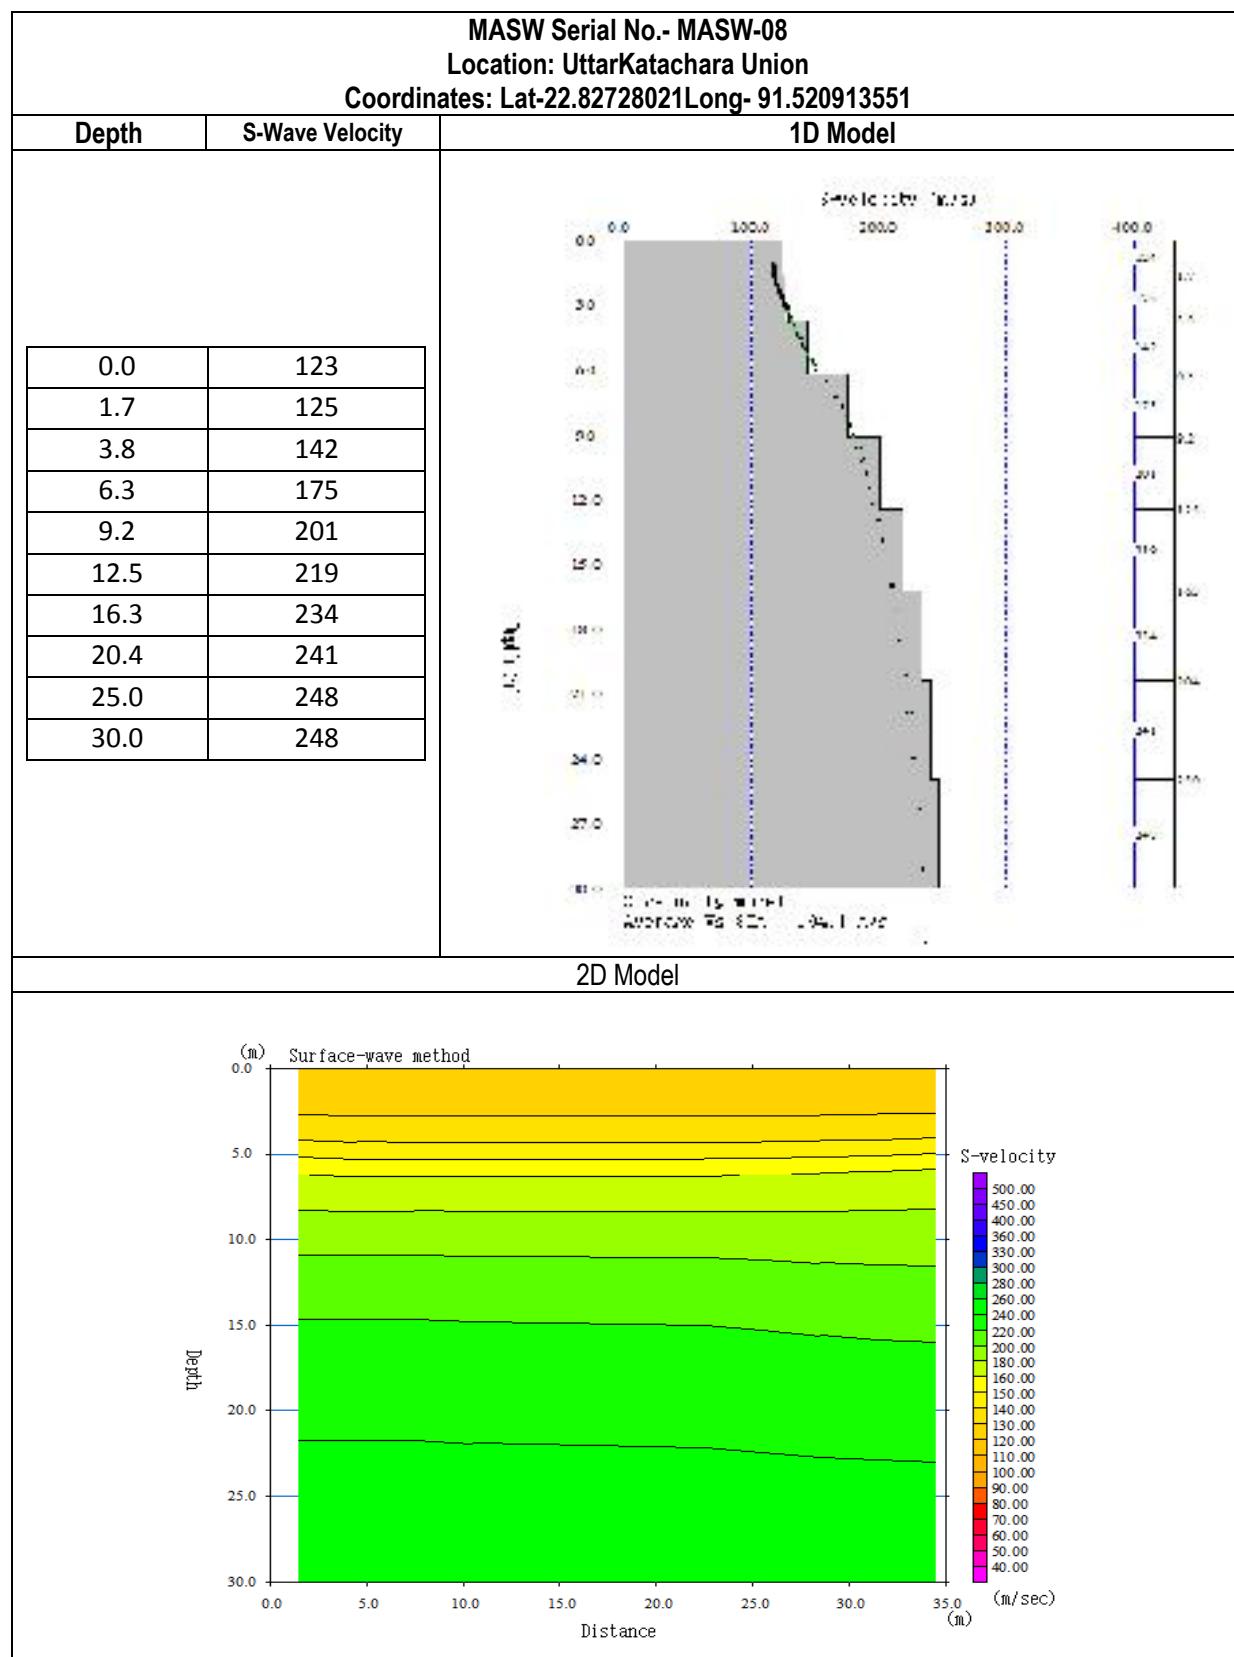



**MASW Serial No.- MASW-09**  
**Location: Veribadh, Ichakhali**  
**Coordinates: Lat-22.783081 Long- 91.469953**

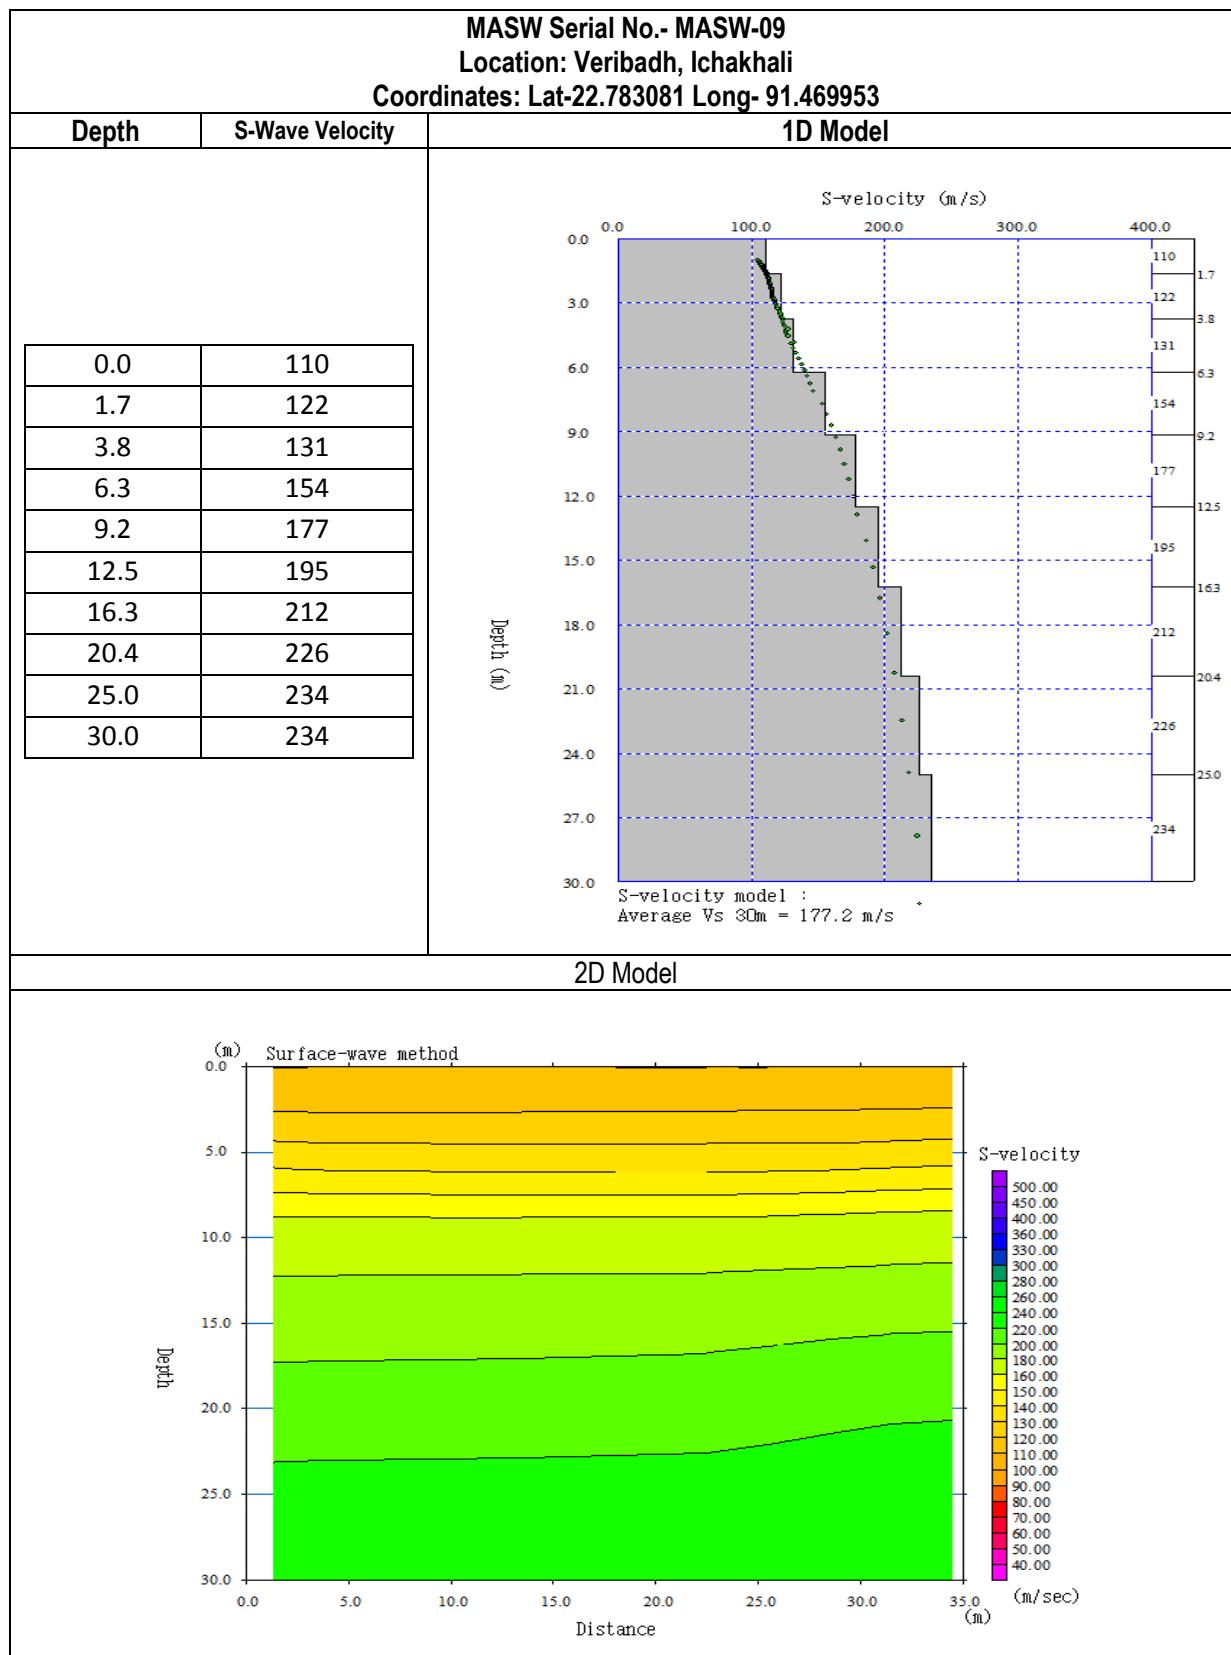

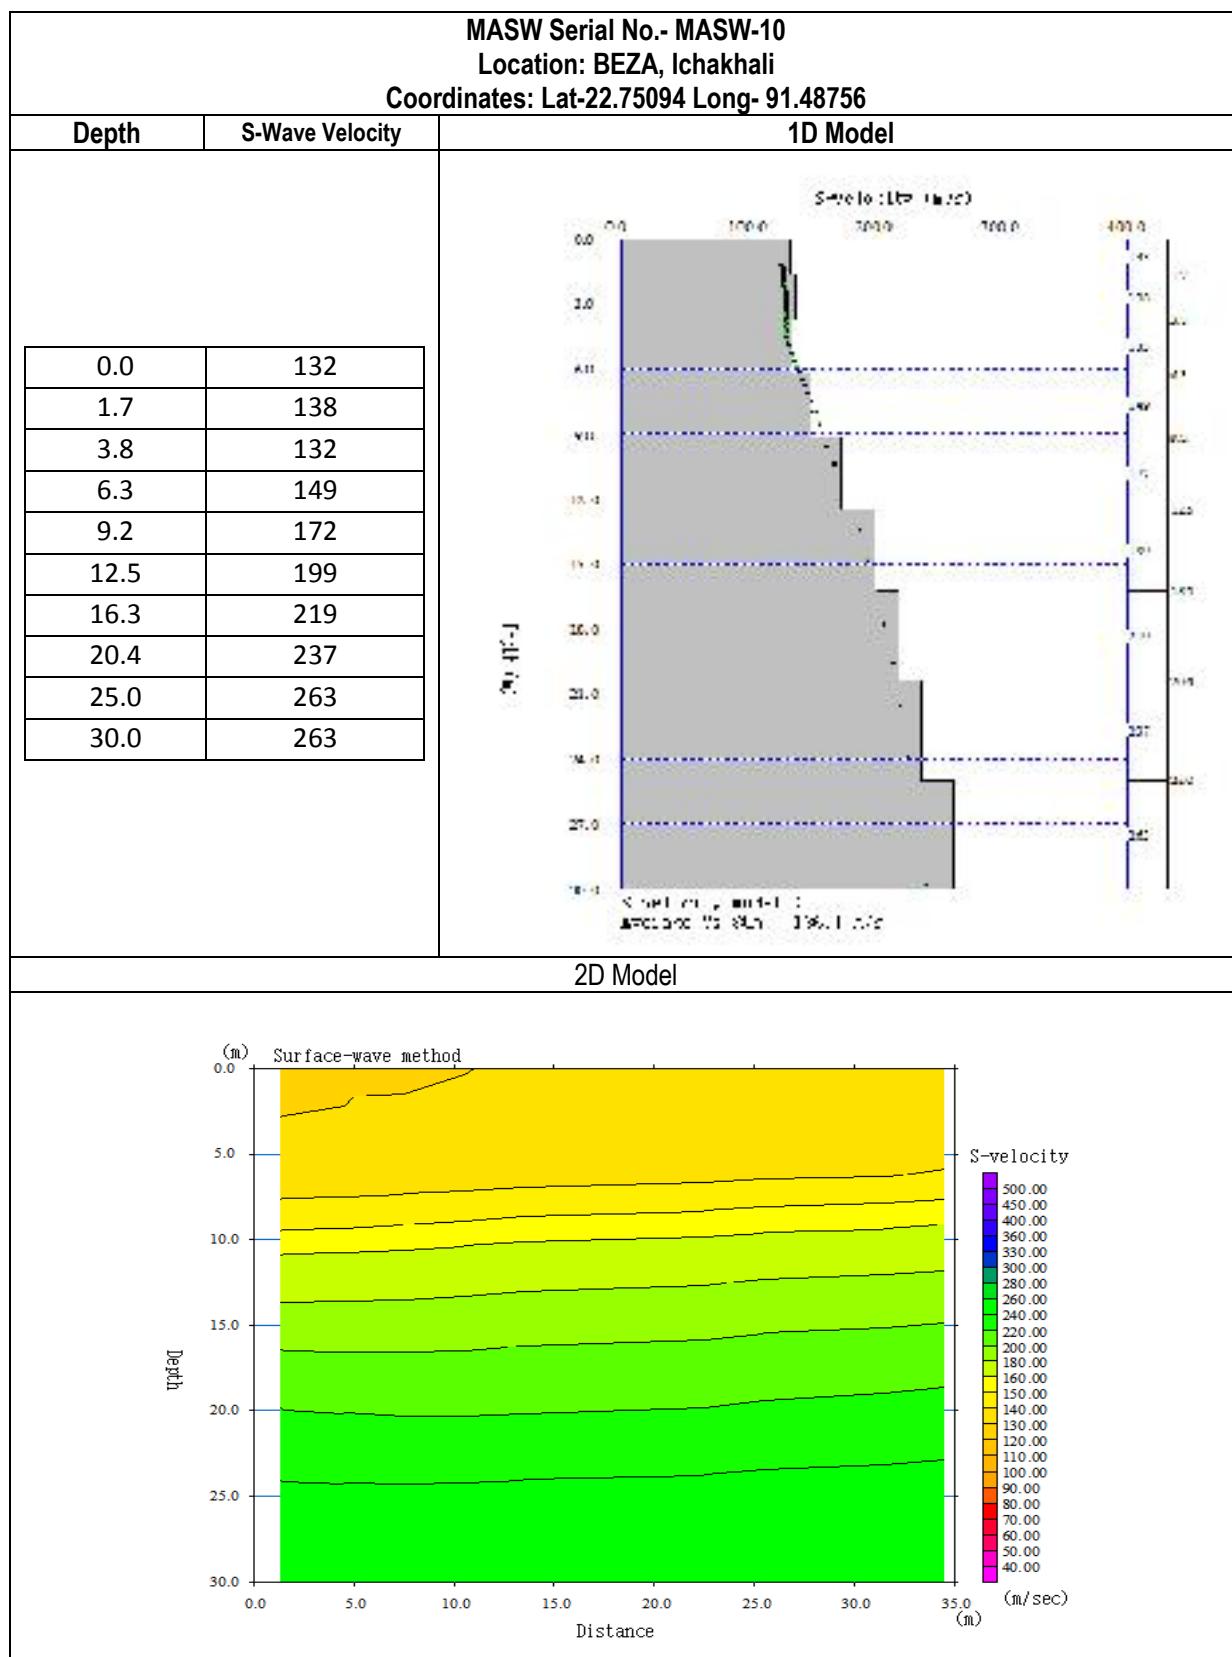


**MASW Serial No.- MASW-11**  
**Location: Muhuri Project, Veribadh**  
**Coordinates: Lat-22.843563 Long- 91.47481**

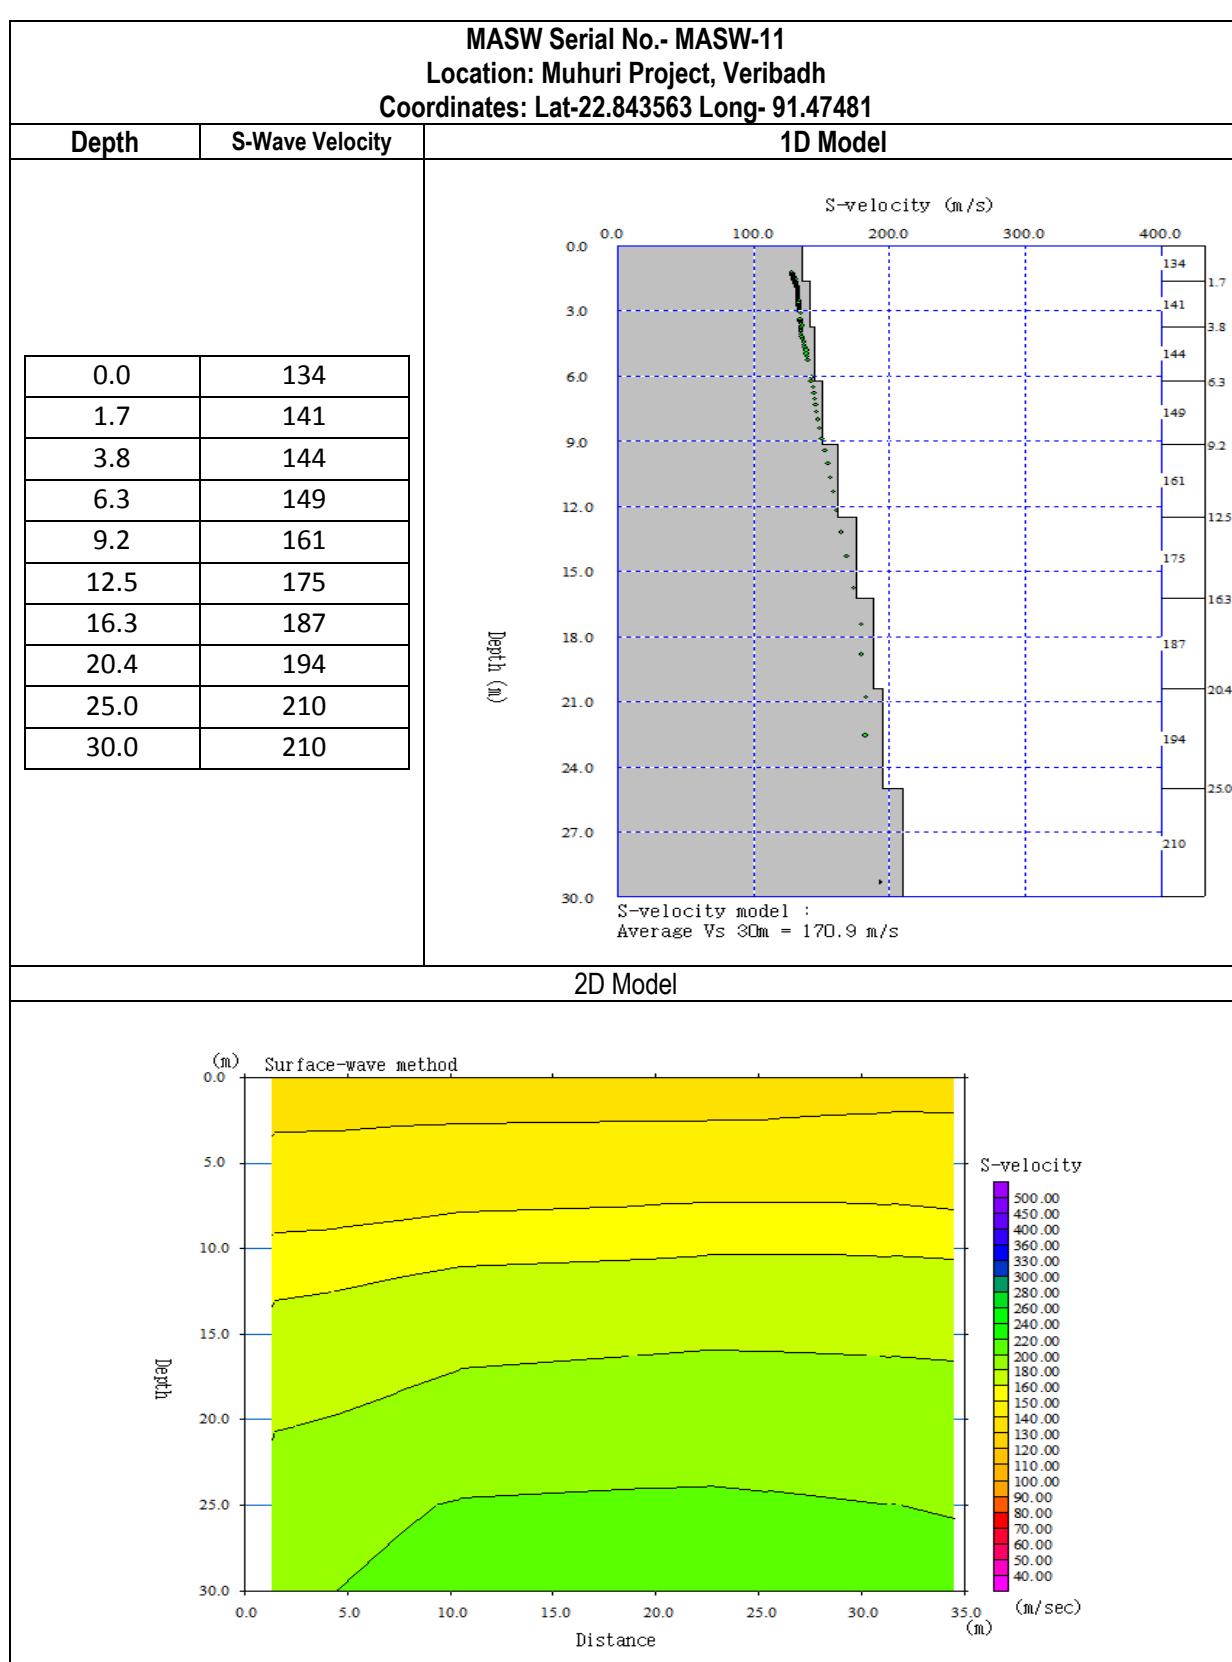


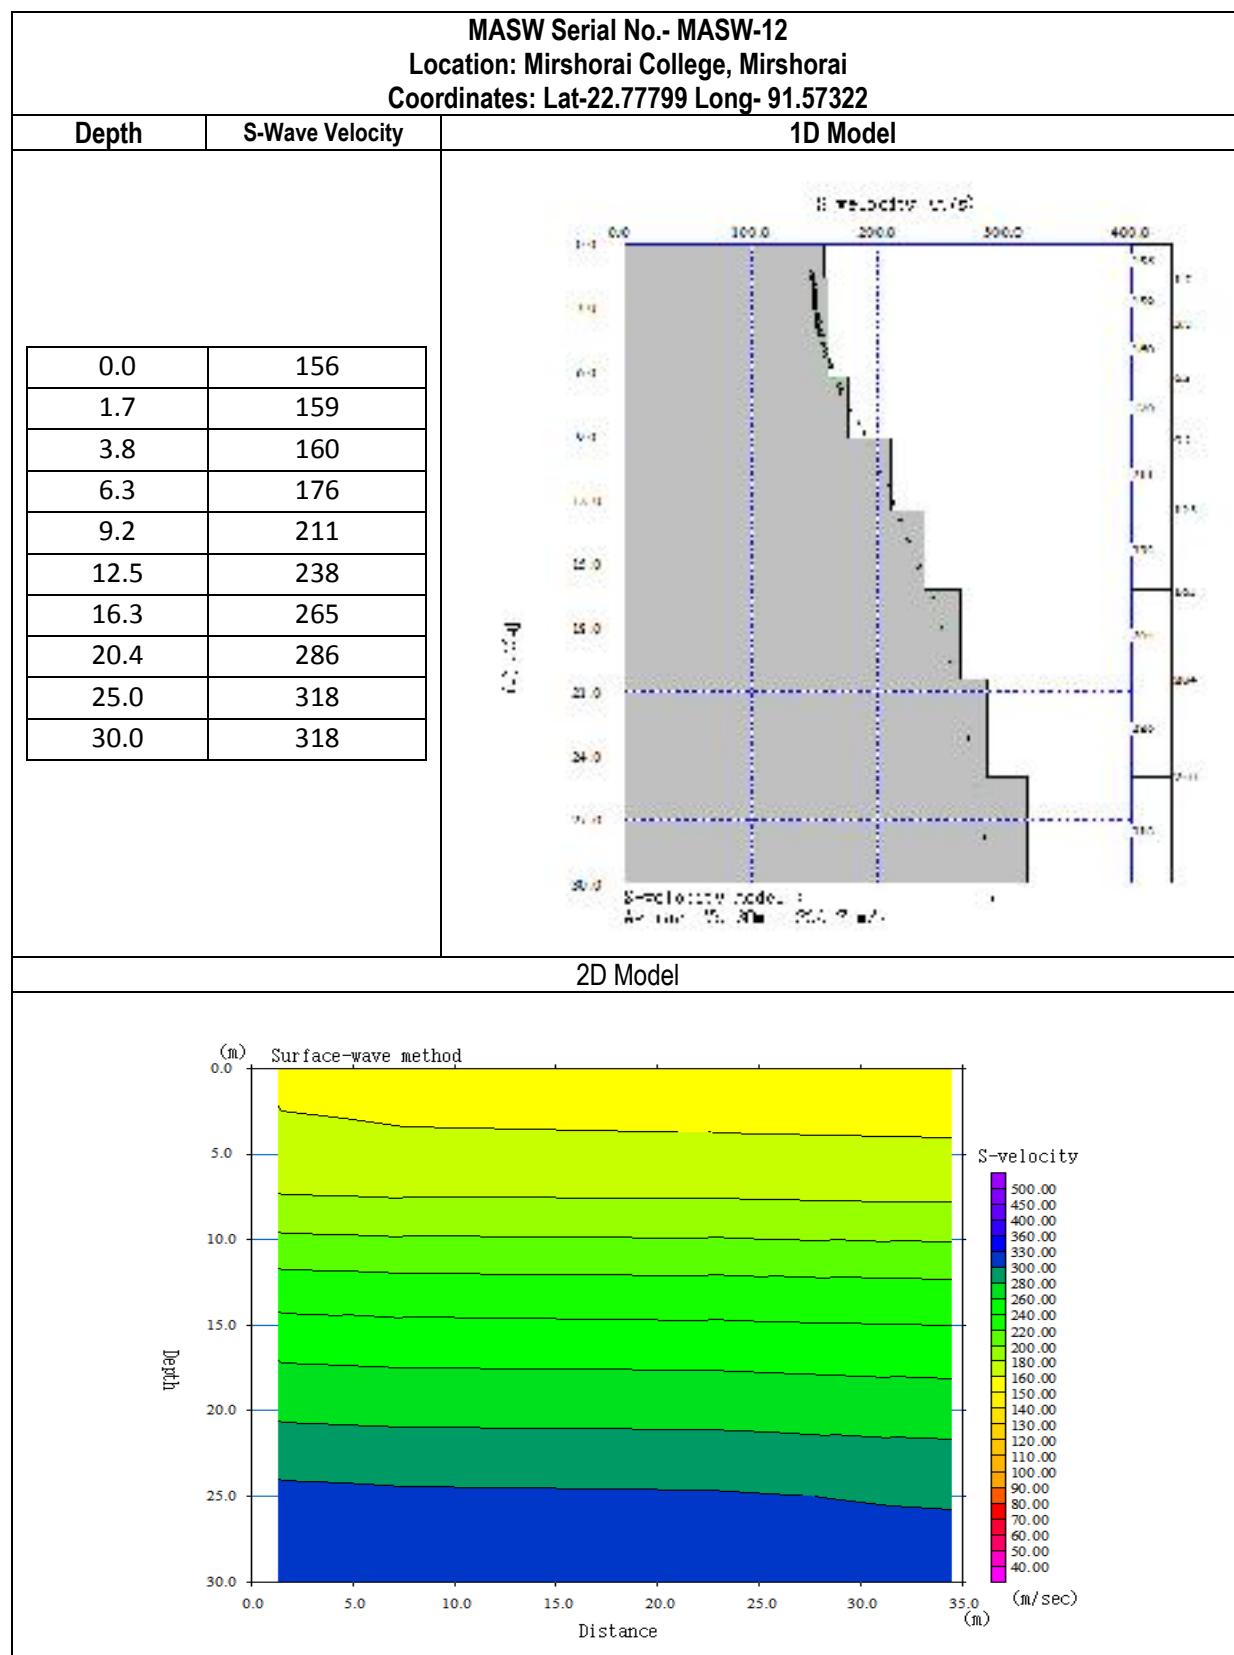



**MASW Serial No.- MASW-13**  
**Location: BishwoDarbar, Amantola**  
**Coordinates: Lat-22.794934 Long- 91.551293**

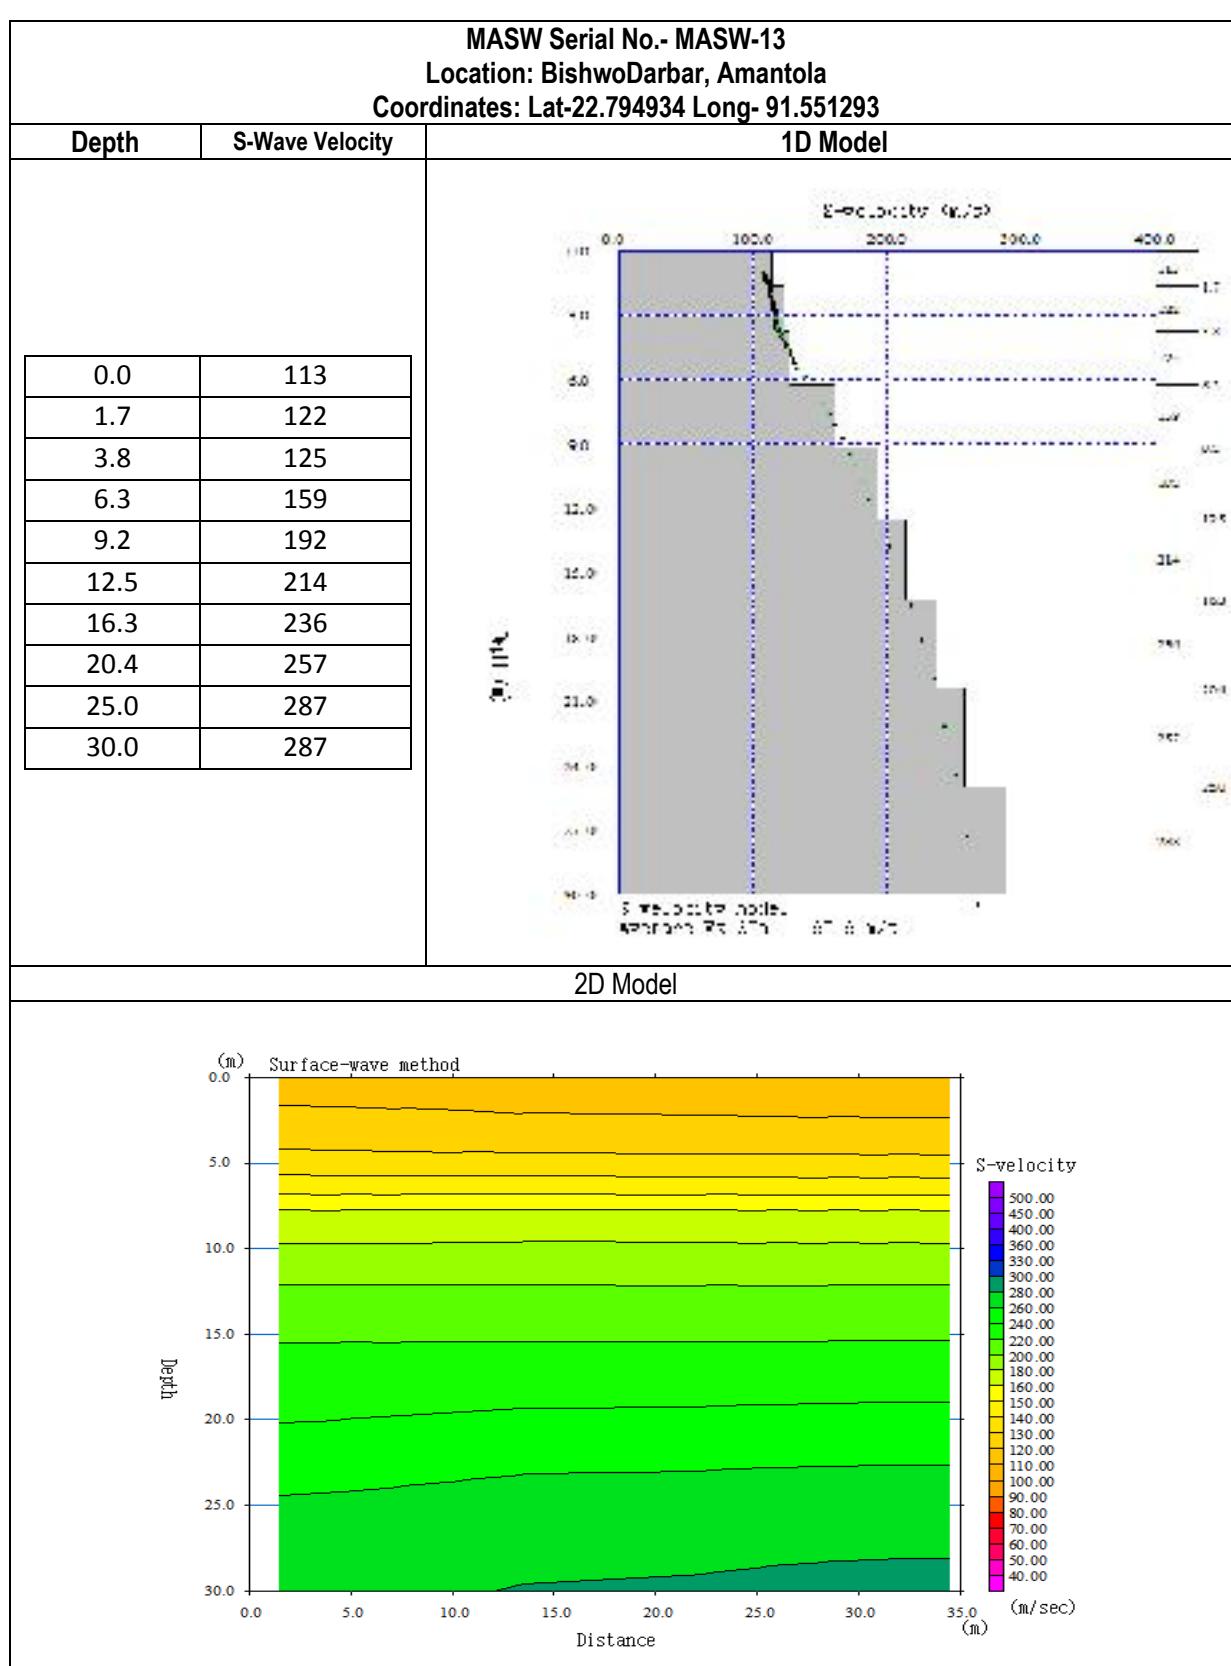



**MASW Serial No.- MASW-14**  
**Location: Tegoria, Magadia**  
**Coordinates: Lat-22.765763 Long- 91.530332**

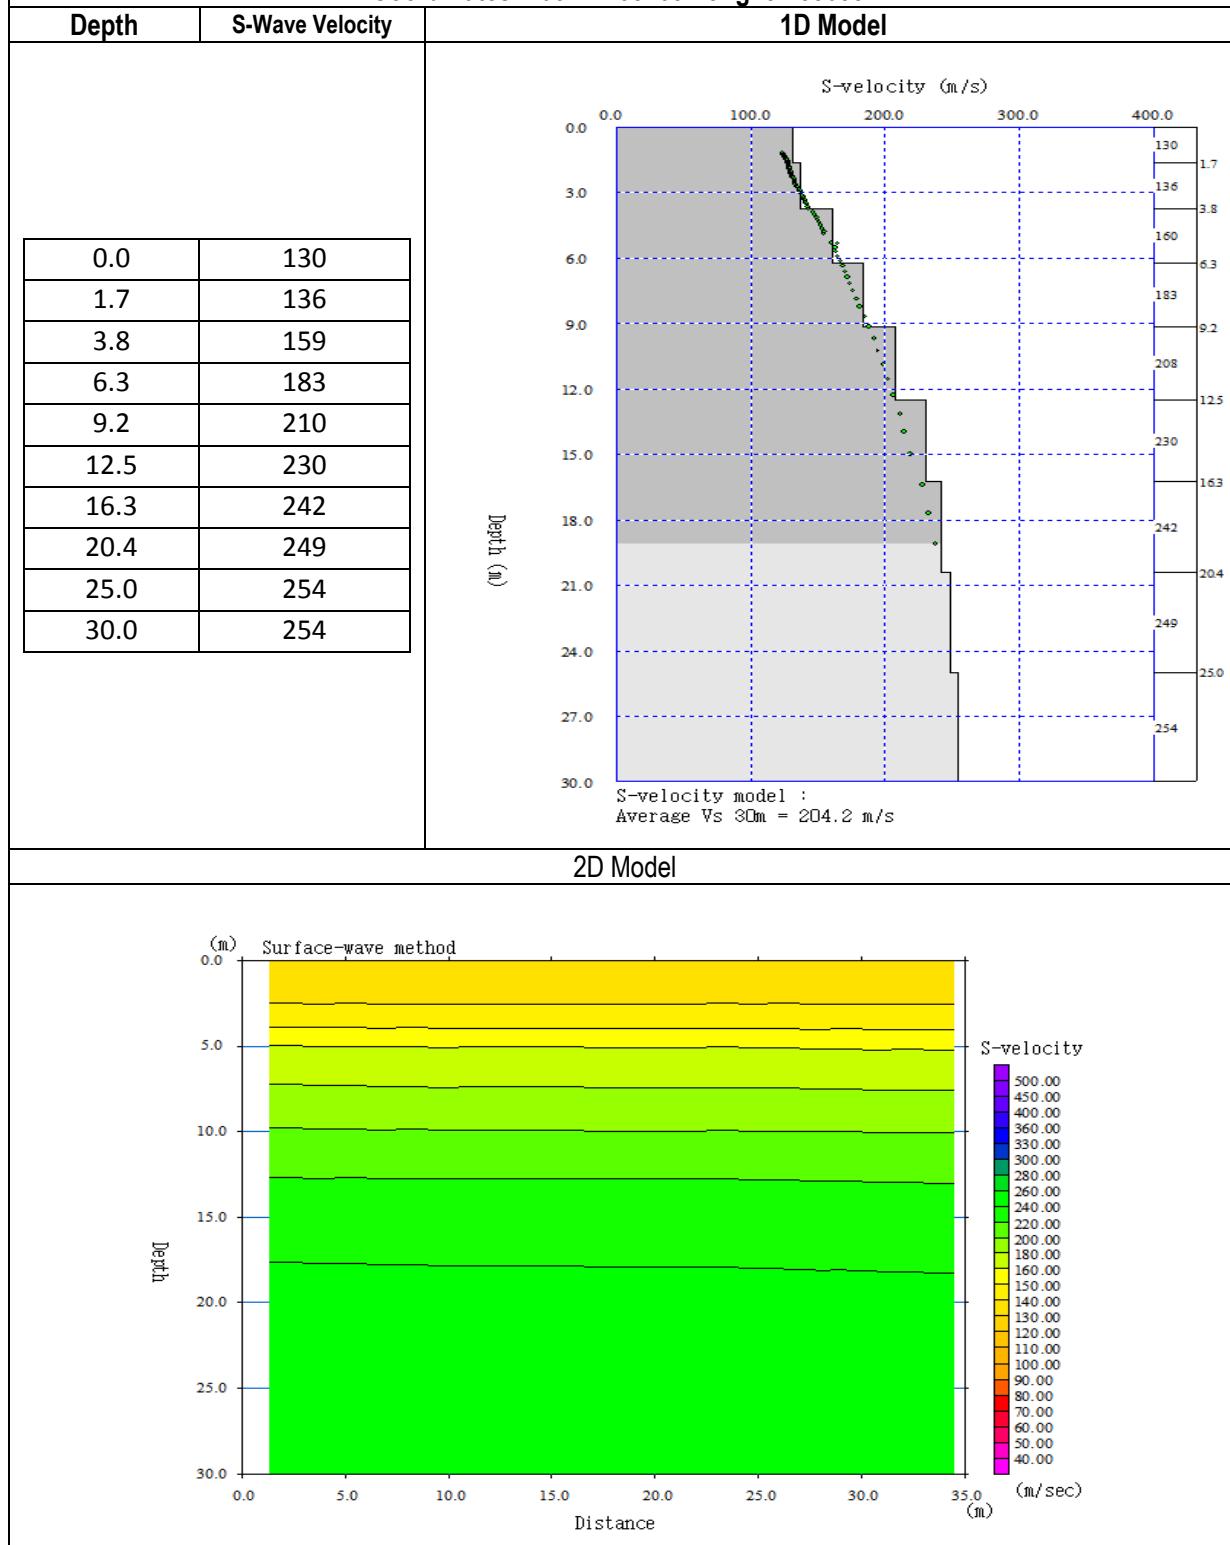


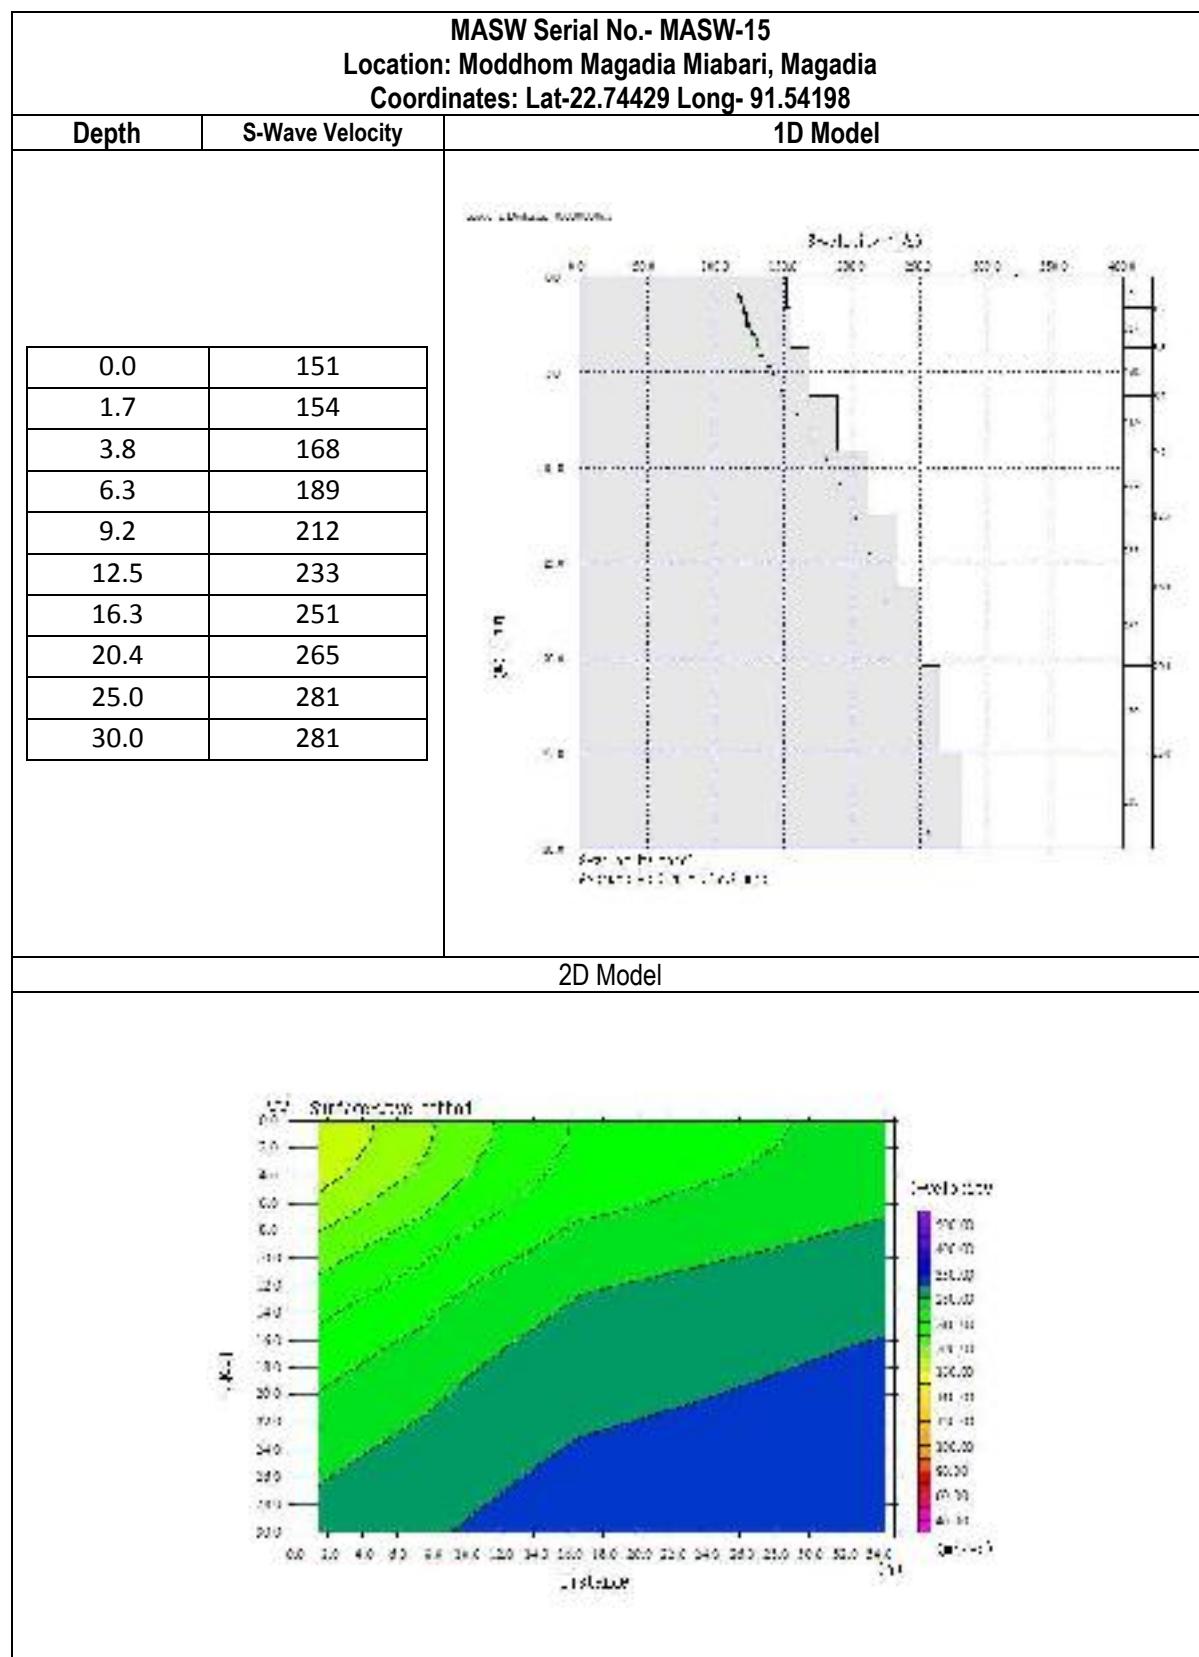

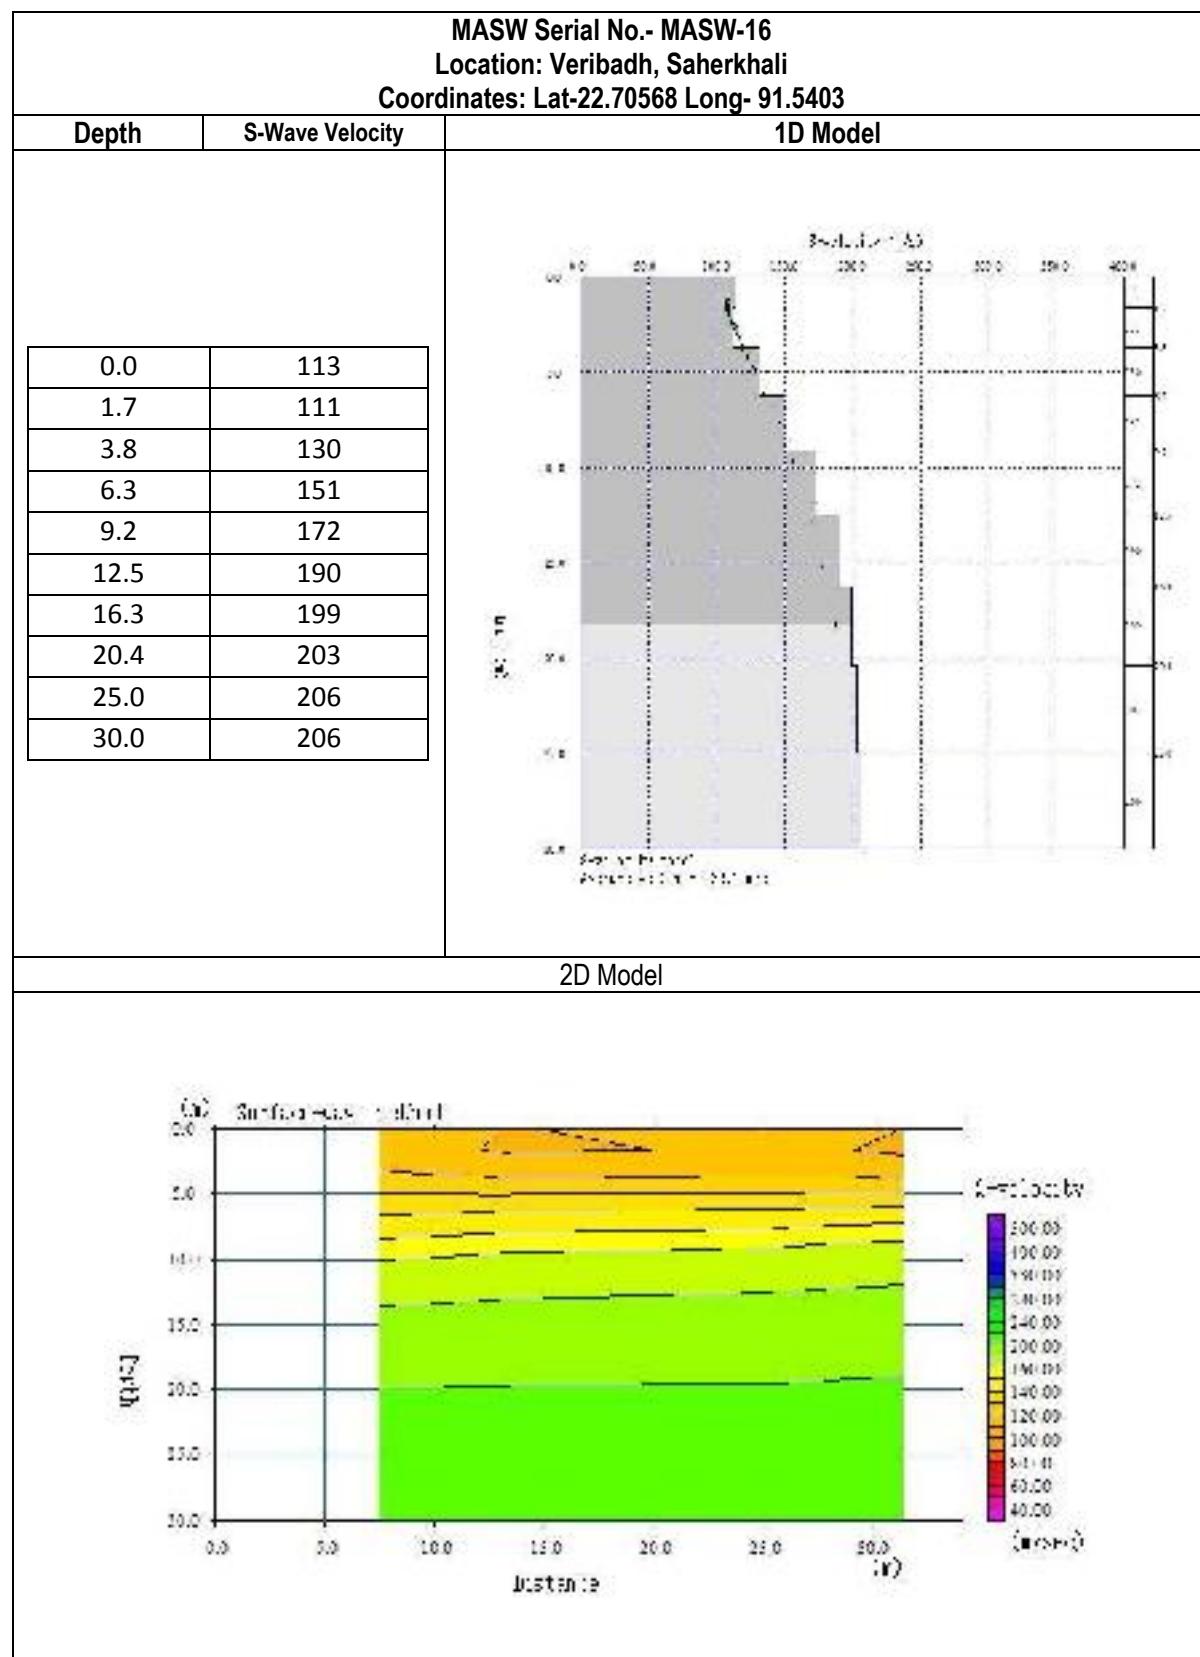


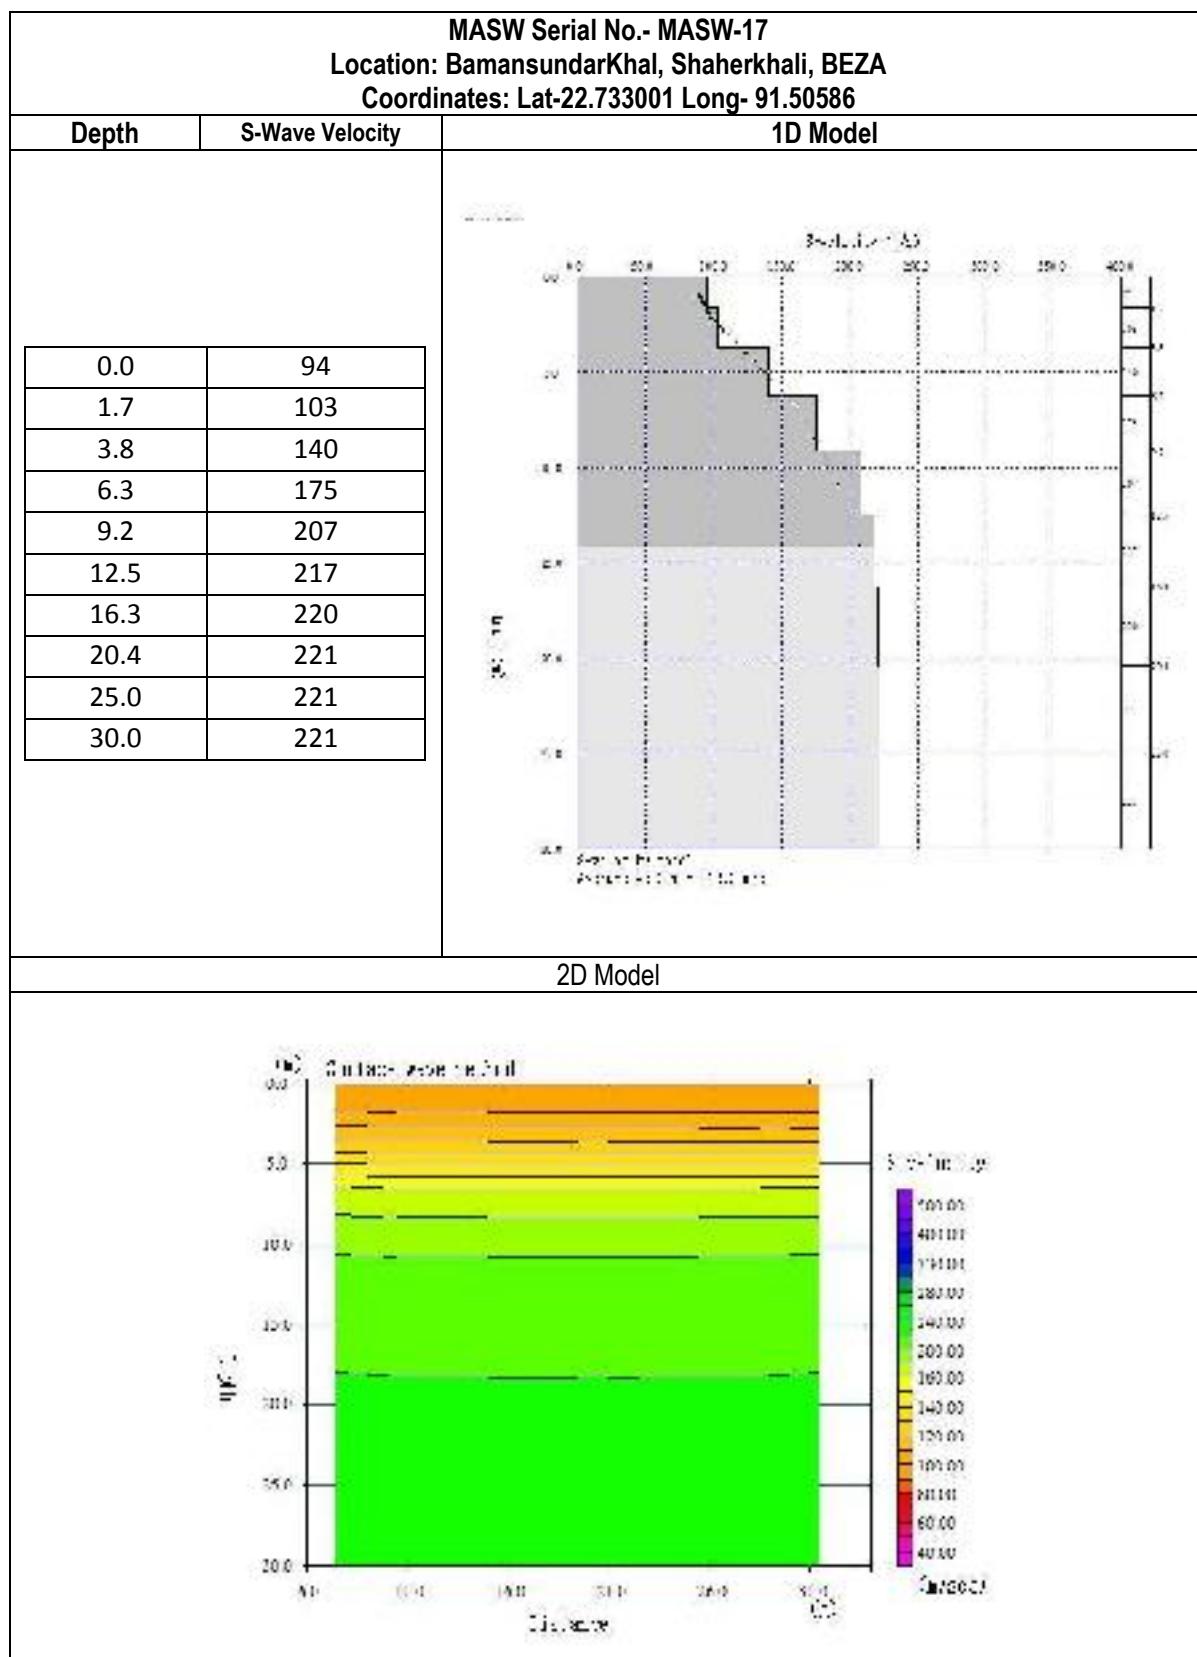

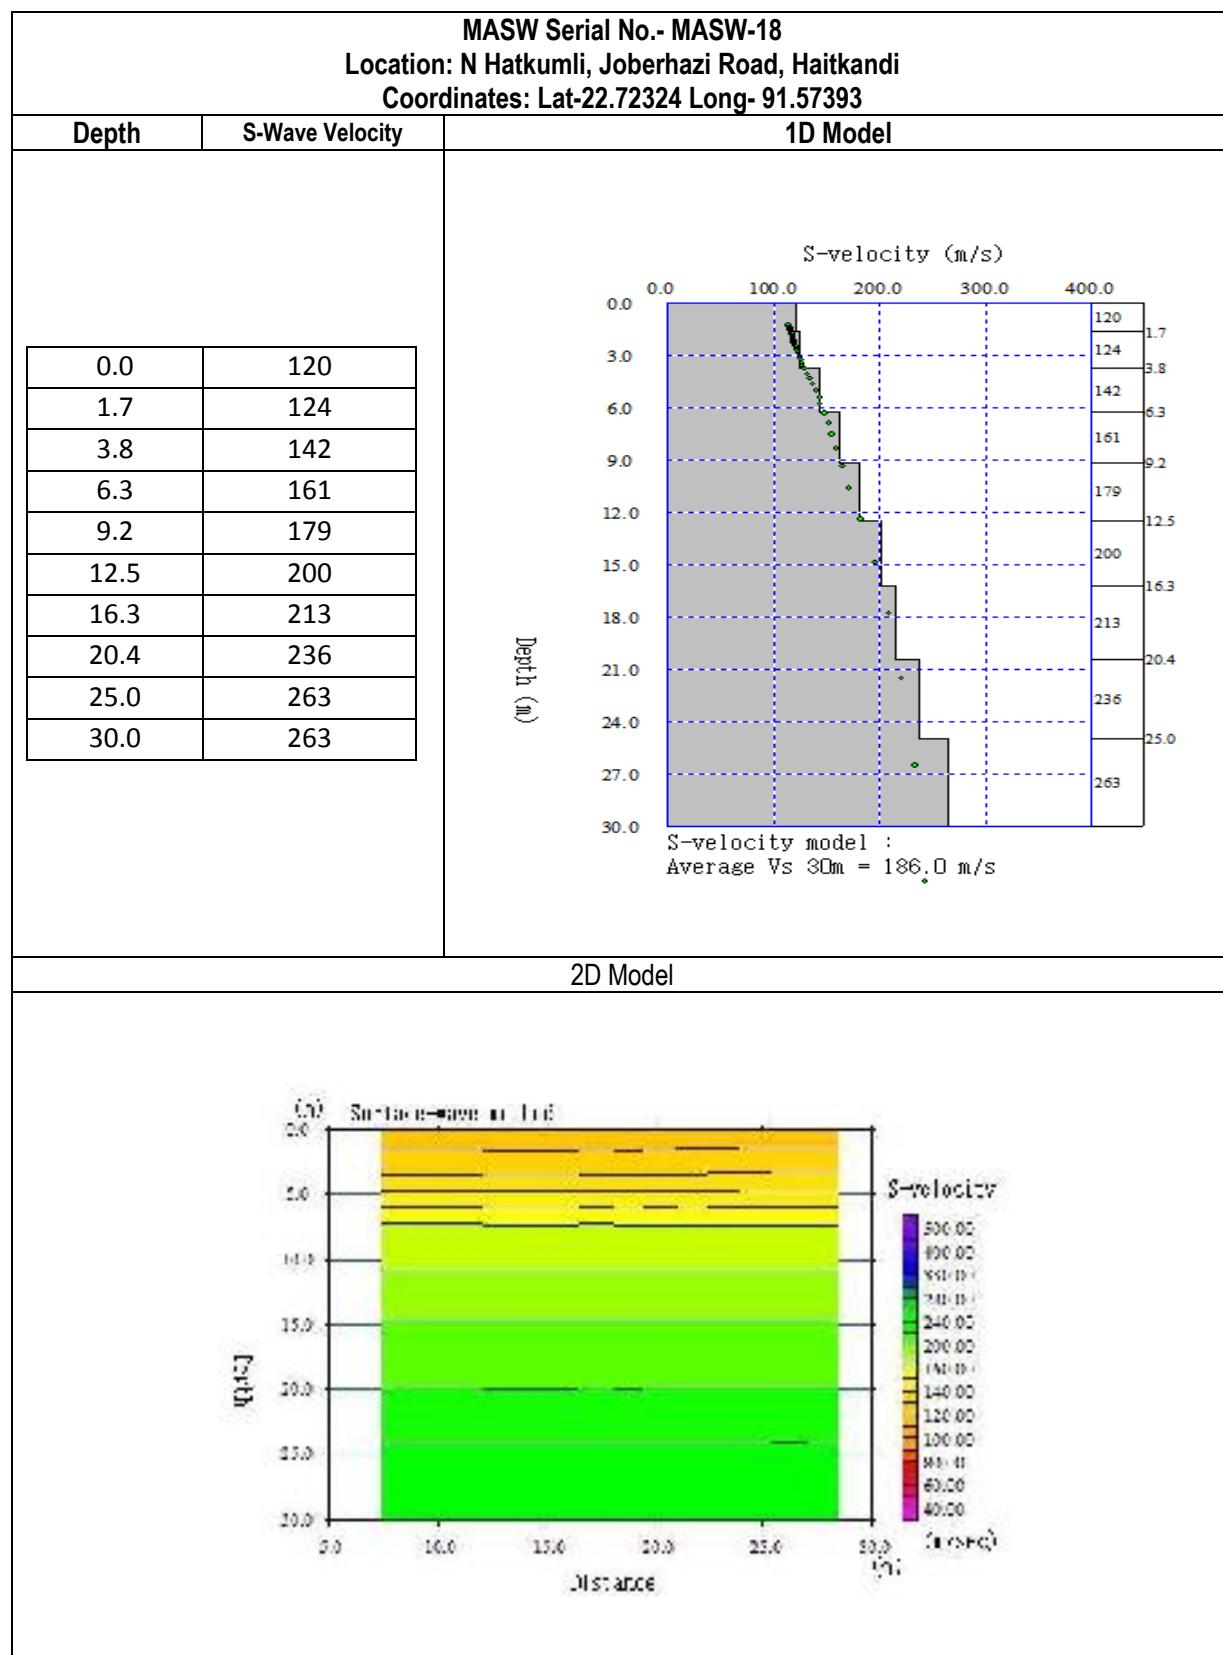

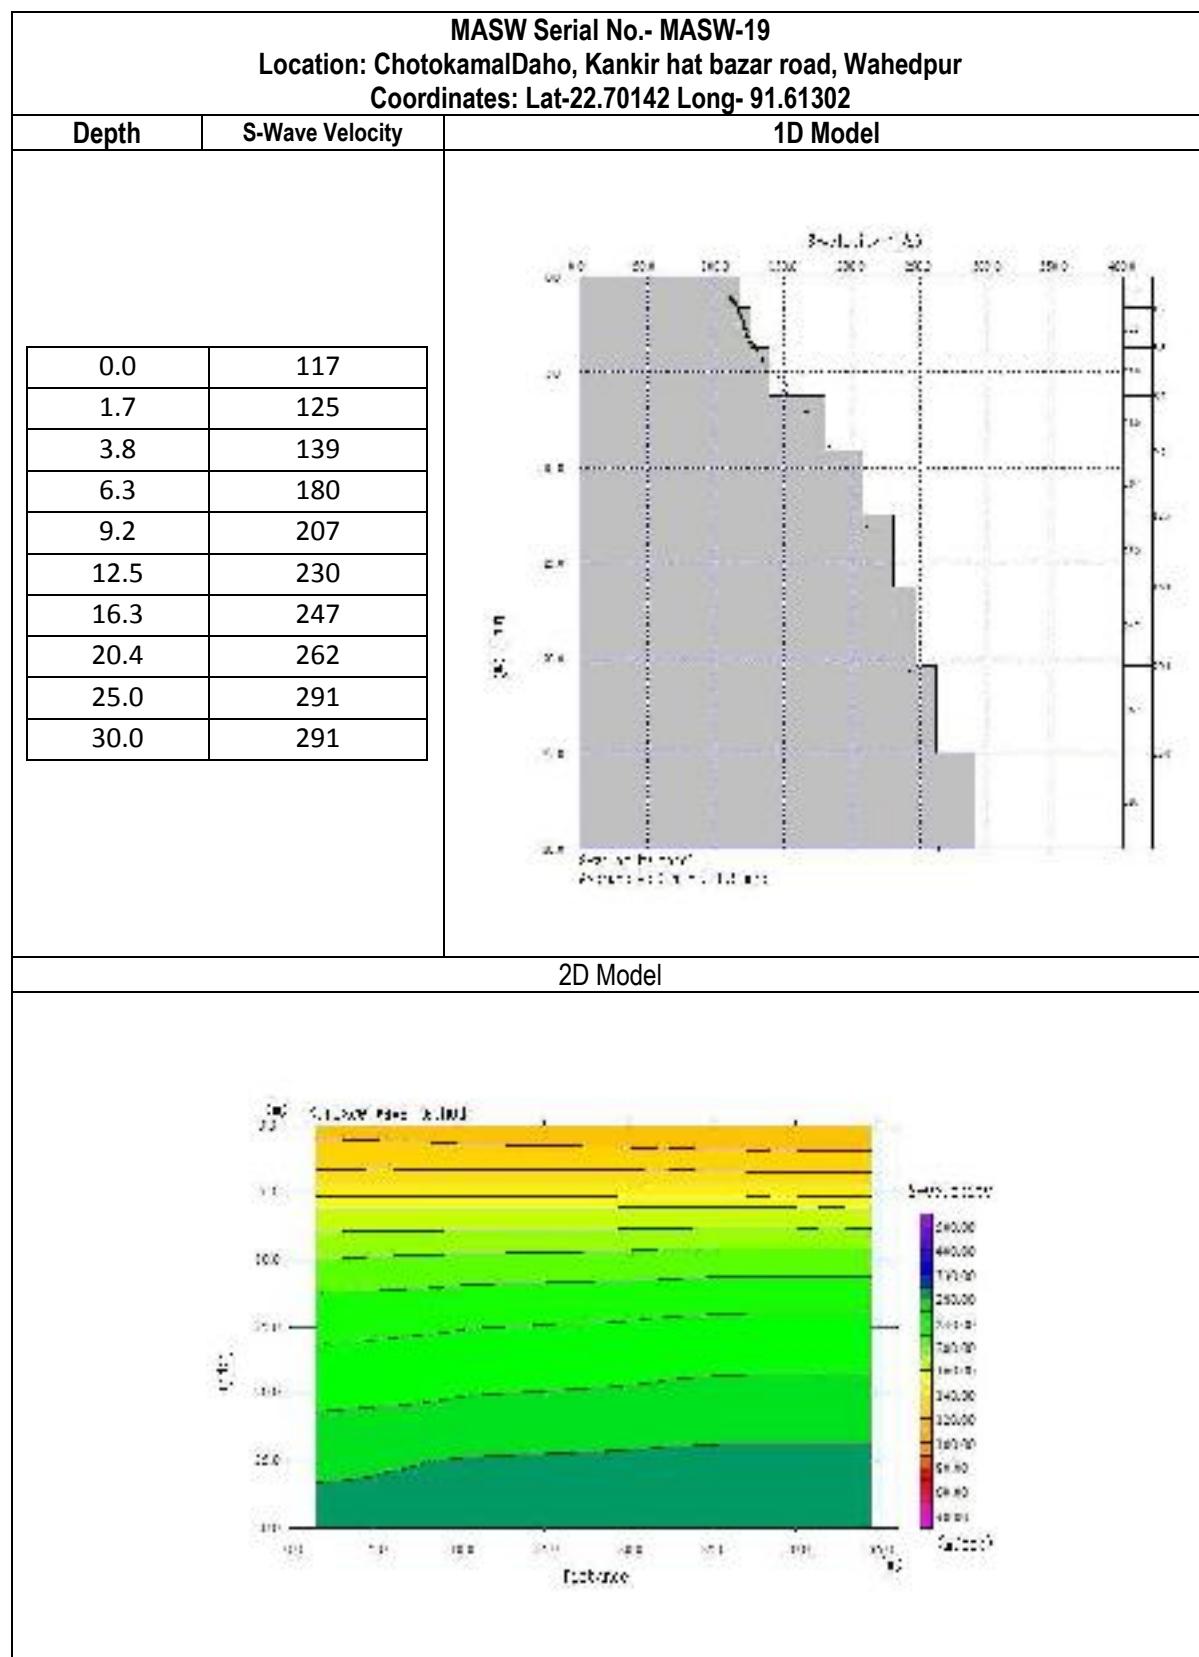

MASW Serial No.- MASW-20  
Location: Monir hut, East HaitKandi  
Coordinates: Lat-22.70559 Long- 91.58147

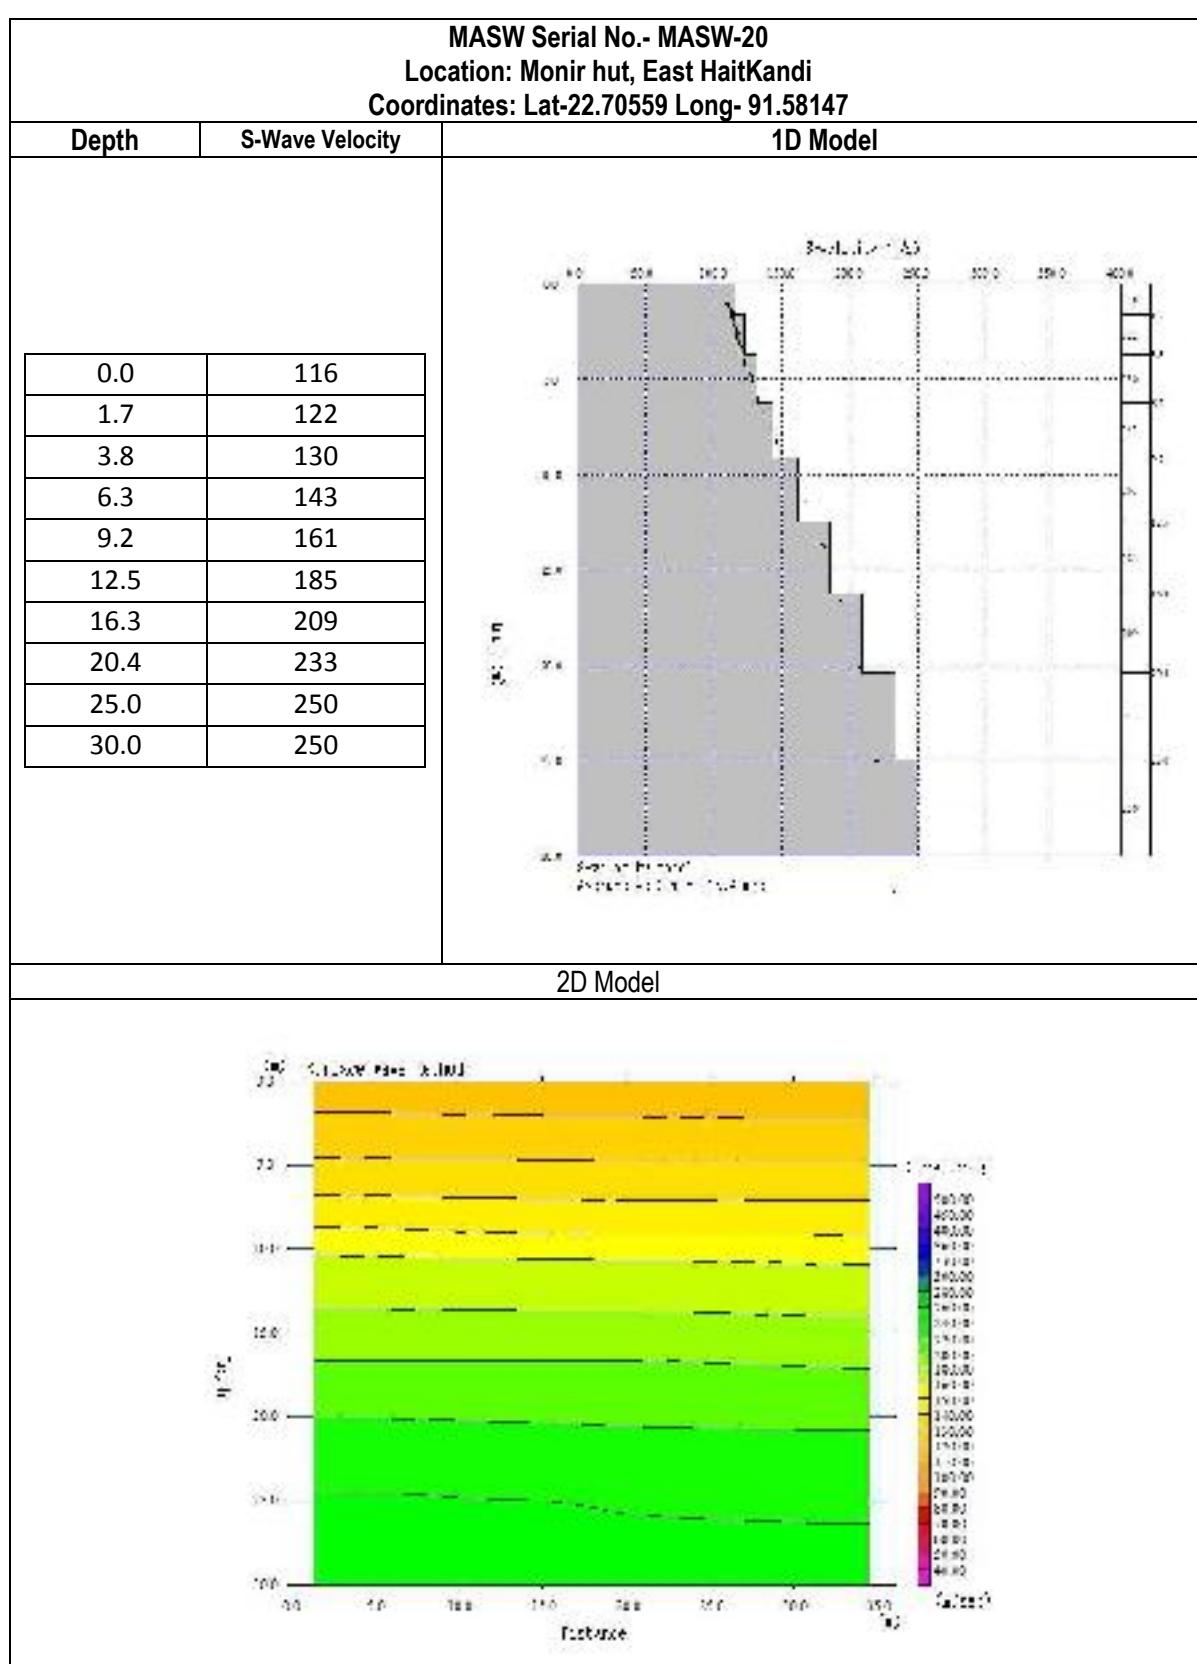

## APPENDIX C: PHOTOGRAPHIC REPRESENTATION OF P-S WAVE VELOCITY LOGGING SURVEY WORK



**PS log No: PS-01**  
Bore hole No: BH-M02  
Location : Choturua, Ward-1, Korerhat  
**Coordinates: Lat- 22.93579 Long- 91.55832**



**PS log No: PS-02**  
Bore hole No: BH-M07  
Location : Khilhinguli Govt. Primary School  
**Coordinates: Lat- 22.89774 Long- 91.5464**



**PS log No: PS-03**  
Bore hole No: BH-M11  
Location : ImampurTitabottolaFurkaniaMadrasa  
**Coordinates: Lat- 22.87949 Long- 91.53175**



**PS log No: PS-04**

Bore hole No: BH-M12

Location : Bono Chowdhury Jame Mosque, Mobarokguna, Dhoom

**Coordinates: Lat- 22.89871 Long- 91.49581**



**PS log No: PS-05**

Bore hole No: BH-M20

Location: 39 no. East Shahedpur Govt. Primary School, Azampur

**Coordinates: Lat- 22.85378 Long- 91.50001**



**PS log No: PS-06**

Bore hole No: BH-M25

Location : Jaforer Poultry Farm, Choitonner Hat, Durgapur

**Coordinates: Lat- 22.83615 Long- 91.54239**



**PS log No: PS-07**

Bore hole No: BH-M27

Location : AbdusSattarBhuiyar Hat Govt. Primary school, Kata chora

**Coordinates: Lat- 22.81188 Long- 91.51746**



**PS log No: PS-08**

Bore hole No: BH-M35

Location : Vanguni Bazar BaitunnurJameMmosque, Ichakhali

**Coordinates: Lat- 22.82661 Long- 91.48335**



**PS log No: PS-09**

Bore hole No: BH-M48

Location : East Ambaria, Mirshorai

**Coordinates: Lat- 22.7794 Long- 91.59575**



**PS log No: PS-10**

Bore hole No: BH-M56

Location : HaziBadiulAlam Chowdhury Govt. Primary School, Mithanala

**Coordinates: Lat- 22.78397 Long- 91.53249**



**PS log No: PS-11**

Bore hole No: BH-M60

Location: 90 no. Maghadia NC Govt. Primary School, Maghadia

**Coordinates: Lat- 22.74951 Long- 91.53351**



**PS log No: PS-12**

Bore hole No: BH-M69

Location : Dhoomkhali, Shaherkhali

**Coordinates: Lat- 22.69363 Long- 91.56484**



**PS log No: PS-13**  
**Bore hole No: BH-M72**  
**Location : MorjidaMasimaTaluk, Borotakia**  
**Coordinates: Lat- 22.74442 Long- 91.58926**



**PS log No: PS-14**  
**Bore hole No: BH-M79**  
**Location : West WahedpurMolla para Mosque**  
**Coordinates: Lat- 22.7002 Long- 91.62035**




**PS log No: PS-15**  
**Bore hole No: BH-M84**  
**Location : South Baliadi Govt. Primary School**  
**Coordinates: Lat- 22.67191 Long- 91.60059**


## APPENDIX D: PHOTOGRAPHIC REPRESENTATION OF P-S WAVE VELOCITY TEST RESULTS AND GRAPHS

### SHEAR WAVE VELOCITY MEASUREMENTS DOWNHOLE SEISMIC TEST (PS LOGGING)


Tested Date(dd/mm/yyyy) : 25/02/2018 Location : Choturua, Ward-1, Korerhat  PS Id : 01/BH-2 Coordinate Lat- 22.93579 Long- 91.55832 Operator : The Olson Instruments Downhole Seismic system						Source : 7kg Sledge Hammer Downhole Receiver : Tri-axial Geophone  Recording Equipment: Freedom Data PC Borehole Information : Grouted Cased Casing Diameter : 75mm PVC Casing	
Time arrival (s)	Recorded Geophone Depth from Existing Ground Level (m)	Source Saint Distance (m), R	Corrected Travel Time for Compressional Wave, $t_c = D/t/R$ (s)	Interval Time, $\Delta t_s$	Shear Wave Velocity $V_s$ , $V_s=D/t_c$ (m/s)	Average Shear Wave Velocity $V_s$ (m/s)	Graphical Representation of Vs
<i>Existing Ground Level</i>							
0.005997	-1	1.41	0.0042	0.0042	236	AVS 5	269
0.010315	-2	2.24	0.0092	0.0050	201		
0.012906	-3	3.16	0.0122	0.0030	331		
0.014633	-4	4.12	0.0142	0.0020	512		
0.018951	-5	5.10	0.0186	0.0044	228		
0.024133	-6	6.08	0.0238	0.0052	192		
0.026724	-7	7.07	0.0265	0.0027	377		
0.031042	-8	8.06	0.0308	0.0043	230		
0.033633	-9	9.06	0.0334	0.0026	381		
0.040542	-10	10.05	0.0403	0.0069	145		
0.045724	-11	11.05	0.0455	0.0052	192		
0.049179	-12	12.04	0.0490	0.0035	288		
0.051770	-13	13.04	0.0516	0.0026	383		
0.056088	-14	14.04	0.0559	0.0043	231		
0.059543	-15	15.03	0.0594	0.0035	289		
0.062997	-16	16.03	0.0629	0.0035	289		
0.065588	-17	17.03	0.0655	0.0026	385		
0.069043	-18	18.03	0.0689	0.0035	289		
0.072497	-19	19.03	0.0724	0.0035	289		
0.074224	-20	20.02	0.0741	0.0017	577		
0.075952	-21	21.02	0.0759	0.0017	576		
0.077679	-22	22.02	0.0776	0.0017	577		
0.078543	-23	23.02	0.0785	0.0009	1149		
0.079406	-24	24.02	0.0793	0.0009	1152		
0.081134	-25	25.02	0.0811	0.0017	577		
0.082861	-26	26.02	0.0828	0.0017	578		
0.084588	-27	27.02	0.0845	0.0017	578		
0.085452	-28	28.02	0.0854	0.0009	1153		
0.087179	-29	29.02	0.0871	0.0017	578		
						AVS 29	333

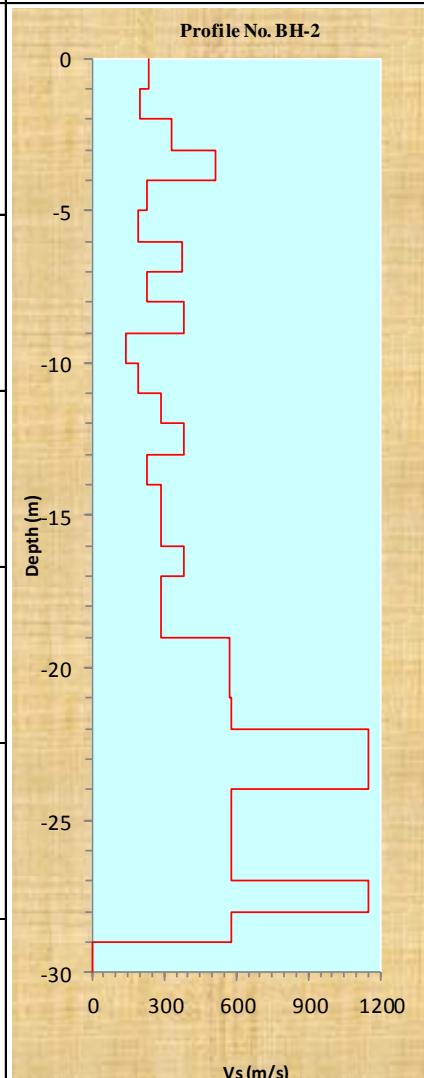

### SHEAR WAVE VELOCITY MEASUREMENTS DOWNHOLE SEISMIC TEST (PS LOGGING)

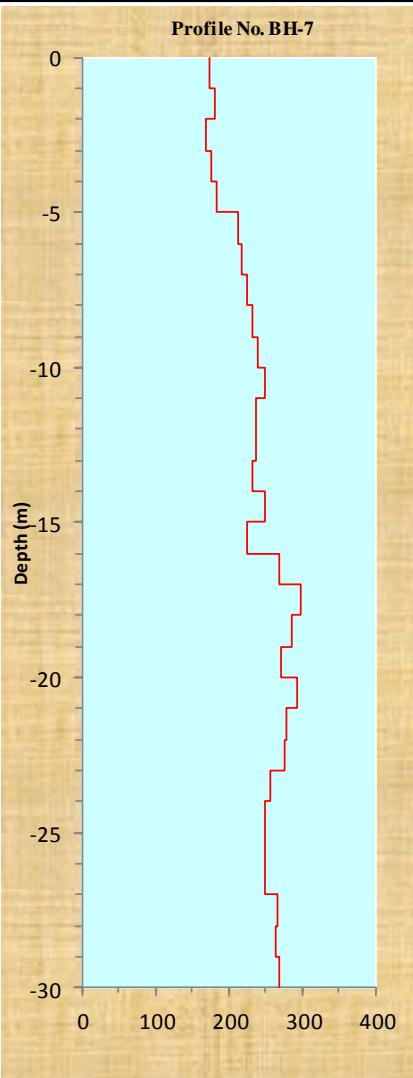Tested Date(dd/mm/yyyy) : 25/02/2018 Location : Khil hinguli Govt. Primary School  PS Id : BH-7 Coordinate Lat- 22.89774 Long- 91.5464 Operator : The Olson Instruments Downhole Seismic system						Source : 7kg Sledge Hammer Downhole Receiver : Tri-axial Geophone  Recording Equipment: Freedom Data PC Borehole Information : Grouted Cased Casing Diameter : 75mm PVC Casing	
Time arrival (s)	Recorded Geophone Depth from Existing Ground Level (m)	Source Saint Distance (m), R	Corrected Travel Time for Compressional Wave, $t_c = D/t/R$ (s)	Interval Time, $\Delta t_s$	Shear Wave Velocity $V_s$ , $V_s = D/t_c$ (m/s)	Average Shear Wave Velocity (m/s)	Graphical Representation of Vs
<i>Existing Ground Level</i>							
0.008153	-1	1.41	0.0058	0.0058	173	AVS 5 177	<b>Profile No. BH-7</b> 
0.012586	-2	2.24	0.0113	0.0055	182		
0.018123	-3	3.16	0.0172	0.0059	168		
0.023557	-4	4.12	0.0229	0.0057	177		
0.028856	-5	5.10	0.0283	0.0054	184		
0.033456	-6	6.08	0.0330	0.0047	213		
0.037967	-7	7.07	0.0376	0.0046	218		
0.042359	-8	8.06	0.0420	0.0044	225		
0.046642	-9	9.06	0.0464	0.0043	231		
0.050781	-10	10.05	0.0505	0.0042	240		
0.054761	-11	11.05	0.0545	0.0040	250		
0.058959	-12	12.04	0.0588	0.0042	237		
0.063158	-13	13.04	0.0630	0.0042	237		
0.067457	-14	14.04	0.0673	0.0043	232		
0.071456	-15	15.03	0.0713	0.0040	249		
0.075891	-16	16.03	0.0757	0.0044	225		
0.079605	-17	17.03	0.0795	0.0037	268		
0.082956	-18	18.03	0.0828	0.0034	298		
0.086454	-19	19.03	0.0863	0.0035	285		
0.090145	-20	20.02	0.0900	0.0037	270		
0.093561	-21	21.02	0.0935	0.0034	292		
0.097152	-22	22.02	0.0971	0.0036	278		
0.100756	-23	23.02	0.1007	0.0036	277		
0.104652	-24	24.02	0.1046	0.0039	256		
0.108656	-25	25.02	0.1086	0.0040	250		
0.112656	-26	26.02	0.1126	0.0040	250		
0.116654	-27	27.02	0.1166	0.0040	250		
0.120415	-28	28.02	0.1203	0.0038	266		
0.124200	-29	29.02	0.1241	0.0038	264		
0.127900	-30	30.02	0.1278	0.0037	270		

### SHEAR WAVE VELOCITY MEASUREMENTS DOWNHOLE SEISMIC TEST (PS LOGGING)

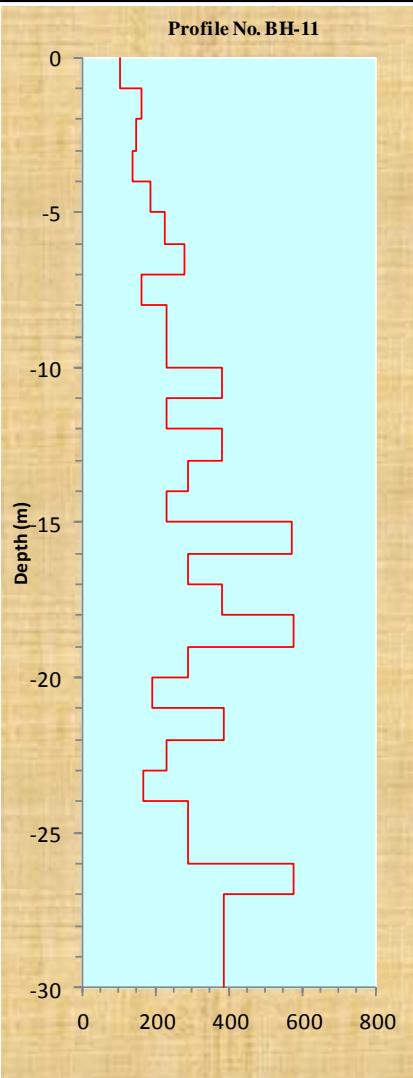Tested Date(dd/mm/yyyy) : 23/02/2018 Location : Imampur Titabot tola Furkania Madrasha  PS Id : 3/BH-11 Coordinate Lat- 22.87949 Long- 91.53175 Operator : The Olson Instruments Downhole Seismic system						Source : 7kg Sledge Hammer Downhole Receiver : Tri-axial Geophone  Recording Equipment: Freedom Data PC Borehole Information : Grouted Cased Casing Diameter : 75mm PVC Casing	
Time arrival (s)	Recorded Geophone Depth from Existing Ground Level (m)	Source Saint Distance (m), R	Corrected Travel Time for Compressional Wave, $t_c = D/t/R$ (s)	Interval Time, $\Delta t_s$	Shear Wave Velocity $V_s$ , $V_s = D/t_c$ (m/s)	Average Shear Wave Velocity (m/s)	Graphical Representation of Vs
<i>Existing Ground Level</i>							
0.013600	-1	1.41	0.0096	0.0096	104		
0.017600	-2	2.24	0.0157	0.0061	163		
0.023651	-3	3.16	0.0224	0.0067	149		
0.030567	-4	4.12	0.0297	0.0072	139		
0.035754	-5	5.10	0.0351	0.0054	185		
0.040077	-6	6.08	0.0395	0.0045	224		
0.043535	-7	7.07	0.0431	0.0036	280		
0.049587	-8	8.06	0.0492	0.0061	164		
0.053909	-9	9.06	0.0536	0.0044	229		
0.058232	-10	10.05	0.0579	0.0044	229		
0.060825	-11	11.05	0.0606	0.0026	380		
0.065148	-12	12.04	0.0649	0.0043	230		
0.067741	-13	13.04	0.0675	0.0026	382		
0.071200	-14	14.04	0.0710	0.0035	288		
0.075522	-15	15.03	0.0754	0.0043	231		
0.077251	-16	16.03	0.0771	0.0017	573		
0.080709	-17	17.03	0.0806	0.0035	288		
0.083303	-18	18.03	0.0832	0.0026	384		
0.085032	-19	19.03	0.0849	0.0017	575		
0.088490	-20	20.02	0.0884	0.0035	289		
0.093677	-21	21.02	0.0936	0.0052	193		
0.096271	-22	22.02	0.0962	0.0026	385		
0.100593	-23	23.02	0.1005	0.0043	231		
0.106645	-24	24.02	0.1066	0.0061	165		
0.110103	-25	25.02	0.1100	0.0035	289		
0.113561	-26	26.02	0.1135	0.0035	289		
0.115290	-27	27.02	0.1152	0.0017	577		
0.117883	-28	28.02	0.1178	0.0026	385		
0.120477	-29	29.02	0.1204	0.0026	385		
0.123071	-30	30.02	0.1230	0.0026	385		
						AVS 5 143	<b>Profile No. BH-11</b> 


### SHEAR WAVE VELOCITY MEASUREMENTS DOWNHOLE SEISMIC TEST (PS LOGGING)

Tested Date(dd/mm/yyyy) : 22/02/2018 Location : Bono Chowdhury Jame Mosque, Mobarokguna, Dhoom PS Id : 4/BH-12 Coordinate Lat- 22.89871 Long- 91.49581 Operator : The Olson Instruments Downhole Seismic system						Source : 7kg Sledge Hammer Downhole Receiver : Tri-axial Geophone Recording Equipment: Freedom Data PC Borehole Information : Grouted Cased Casing Diameter : 75mm PVC Casing	
Time arrival (s)	Recorded Geophone Depth from Existing Ground Level (m)	Source Saint Distance (m), R	Corrected Travel Time for Compressional Wave, $t_c = D/t/R$ (s)	Interval Time, $\Delta t_s$	Shear Wave Velocity $V_s$ , $V_s = D/t_c$ (m/s)	Average Shear Wave Velocity (m/s)	Graphical Representation of Vs
<i>Existing Ground Level</i>							
0.013996	-1	1.41	0.0099	0.0099	101	AVS 5	Profile No. BH-12
0.020039	-2	2.24	0.0179	0.0080	125		
0.027808	-3	3.16	0.0264	0.0085	118		
0.039030	-4	4.12	0.0379	0.0115	87		
0.045073	-5	5.10	0.0442	0.0063	158		
0.056295	-6	6.08	0.0555	0.0113	88		
0.060611	-7	7.07	0.0600	0.0045	224		
0.067517	-8	8.06	0.0670	0.0070	143		
0.072696	-9	9.06	0.0723	0.0053	190		
0.079602	-10	10.05	0.0792	0.0070	144		
0.083918	-11	11.05	0.0836	0.0044	229		
0.089961	-12	12.04	0.0897	0.0061	165		
0.096004	-13	13.04	0.0957	0.0061	165		
0.101183	-14	14.04	0.1009	0.0052	192		
0.106363	-15	15.03	0.1061	0.0052	192		
0.111542	-16	16.03	0.1113	0.0052	192		
0.115858	-17	17.03	0.1157	0.0043	231		
0.120174	-18	18.03	0.1200	0.0043	231		
0.123627	-19	19.03	0.1235	0.0035	288		
0.127944	-20	20.02	0.1278	0.0043	231		
0.131397	-21	21.02	0.1312	0.0035	289		
0.135713	-22	22.02	0.1356	0.0043	231		
0.139166	-23	23.02	0.1390	0.0035	289		
0.146072	-24	24.02	0.1459	0.0069	145		
0.150388	-25	25.02	0.1503	0.0043	231		
0.152978	-26	26.02	0.1529	0.0026	385		
0.156430	-27	27.02	0.1563	0.0035	289		
0.159883	-28	28.02	0.1598	0.0035	289		
0.165063	-29	29.02	0.1650	0.0052	193		
0.167653	-30	30.02	0.1676	0.0026	385		

### SHEAR WAVE VELOCITY MEASUREMENTS DOWNHOLE SEISMIC TEST (PS LOGGING)


Tested Date(dd/mm/yyyy) : 22/02/2018						Source : 7kg Sledge Hammer
Location : 39 no. East Shahedpur Govt. Primary School, Azampur						Downhole Receiver : Tri-axial Geophone
PS Id : 5/BH-20						Recording Equipment: Freedom Data PC
Coordinate Lat- 22.85378 Long- 91.50001						Borehole Information : Grouted Cased
Operator : The Olson Instruments Downhole Seismic system						Casing Diameter : 75mm PVC Casing
Time arrival (s)	Recorded Geophone Depth from Existing Ground Level (m)	Source Saint Distance (m), R	Corrected Travel Time for Compressional Wave, $t_c = D/t/R$ (s)	Interval Time, $\Delta t_s$	Shear Wave Velocity $V_s$ , $V_s = D/t_c$ (m/s)	Average Shear Wave Velocity (m/s)
<i>Existing Ground Level</i>						<b>Graphical Representation of Vs</b>
0.020659	-1	1.41	0.0146	0.0146	68	AVS 5
0.024114	-2	2.24	0.0216	0.0070	144	107
0.033614	-3	3.16	0.0319	0.0103	97	
0.037933	-4	4.12	0.0368	0.0049	204	
0.047433	-5	5.10	0.0465	0.0097	103	
0.052615	-6	6.08	0.0519	0.0054	186	
0.061252	-7	7.07	0.0606	0.0087	114	
0.066434	-8	8.06	0.0659	0.0053	189	
0.072480	-9	9.06	0.0720	0.0061	164	
0.077662	-10	10.05	0.0773	0.0052	191	
0.083708	-11	11.05	0.0834	0.0061	164	
0.091481	-12	12.04	0.0912	0.0078	128	
0.094935	-13	13.04	0.0947	0.0035	287	
0.101845	-14	14.04	0.1016	0.0069	144	
0.105299	-15	15.03	0.1051	0.0035	287	
0.109618	-16	16.03	0.1094	0.0043	230	
0.114800	-17	17.03	0.1146	0.0052	192	
0.119118	-18	18.03	0.1189	0.0043	231	
0.124300	-19	19.03	0.1241	0.0052	193	
0.129482	-20	20.02	0.1293	0.0052	193	
0.132073	-21	21.02	0.1319	0.0026	384	
0.138119	-22	22.02	0.1380	0.0061	165	
0.141574	-23	23.02	0.1414	0.0035	289	
0.143301	-24	24.02	0.1432	0.0017	576	
0.145029	-25	25.02	0.1449	0.0017	576	
0.145892	-26	26.02	0.1458	0.0009	1148	
0.147620	-27	27.02	0.1475	0.0017	576	
						Profile No. BH-20

### SHEAR WAVE VELOCITY MEASUREMENTS DOWNHOLE SEISMIC TEST (PS LOGGING)

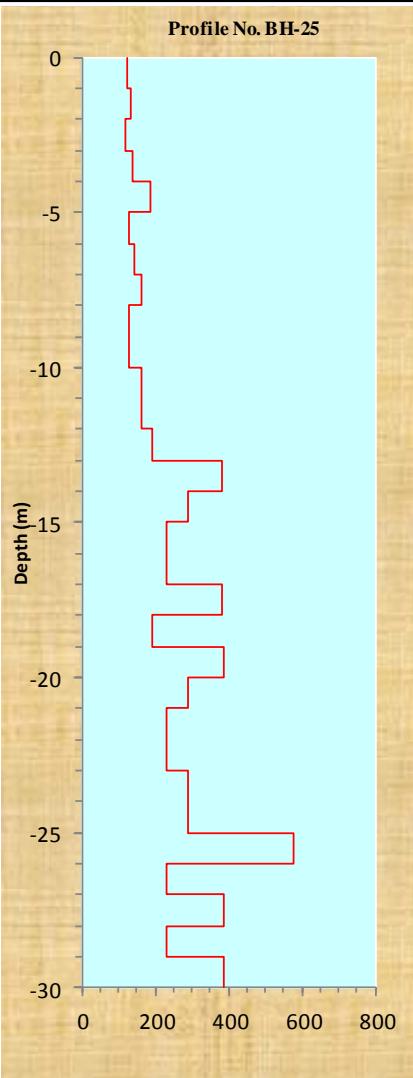Tested Date(dd/mm/yyyy) : 23/02/2018 Location : Jaforer Poultry Farm, Choitonner Hat, Durgapur PS Id : 6/BH-25 Coordinate Lat- 22.83615 Long- 91.54239 Operator : The Olson Instruments Downhole Seismic system						Source : 7kg Sledge Hammer Downhole Receiver : Tri-axial Geophone Recording Equipment: Freedom Data PC Borehole Information : Grouted Cased Casing Diameter : 75mm PVC Casing	
Time arrival (s)	Recorded Geophone Depth from Existing Ground Level (m)	Source Saint Distance (m), R	Corrected Travel Time for Compressional Wave, $t_c = D/t/R$ (s)	Interval Time, $\Delta t_s$	Shear Wave Velocity $V_s$ , $V_s = D/t_c$ (m/s)	Average Shear Wave Velocity (m/s)	Graphical Representation of Vs
<i>Existing Ground Level</i>							
0.011599	-1	1.41	0.0082	0.0082	122	AVS 5 AVS 10 AVS 15 AVS 20 AVS 25 AVS 30	<b>Profile No. BH-25</b> 
0.017639	-2	2.24	0.0158	0.0076	132		
0.025405	-3	3.16	0.0241	0.0083	120		
0.032308	-4	4.12	0.0313	0.0072	138		
0.037486	-5	5.10	0.0368	0.0054	185		
0.045252	-6	6.08	0.0446	0.0079	127		
0.052155	-7	7.07	0.0516	0.0070	143		
0.058195	-8	8.06	0.0577	0.0061	164		
0.065961	-9	9.06	0.0656	0.0078	128		
0.073727	-10	10.05	0.0734	0.0078	128		
0.079768	-11	11.05	0.0794	0.0061	164		
0.085808	-12	12.04	0.0855	0.0061	165		
0.090985	-13	13.04	0.0907	0.0052	192		
0.093574	-14	14.04	0.0933	0.0026	382		
0.097026	-15	15.03	0.0968	0.0035	288		
0.101340	-16	16.03	0.1011	0.0043	231		
0.105655	-17	17.03	0.1055	0.0043	231		
0.108243	-18	18.03	0.1081	0.0026	384		
0.113421	-19	19.03	0.1133	0.0052	193		
0.116009	-20	20.02	0.1159	0.0026	385		
0.119461	-21	21.02	0.1193	0.0035	289		
0.123776	-22	22.02	0.1236	0.0043	231		
0.128090	-23	23.02	0.1280	0.0043	231		
0.131542	-24	24.02	0.1314	0.0035	289		
0.134993	-25	25.02	0.1349	0.0035	289		
0.136719	-26	26.02	0.1366	0.0017	577		
0.141033	-27	27.02	0.1409	0.0043	232		
0.143622	-28	28.02	0.1435	0.0026	385		
0.147937	-29	29.02	0.1478	0.0043	232		
0.150525	-30	30.02	0.1504	0.0026	386		


### SHEAR WAVE VELOCITY MEASUREMENTS DOWNHOLE SEISMIC TEST (PS LOGGING)

Tested Date(dd/mm/yyyy) : 24/02/2018						Source : 7kg Sledge Hammer
Location : Abdus Sattar Bhuiyar Hat Govt. Primary school, Kata chora						Downhole Receiver : Tri-axial Geophone
PS Id : BH-27						Recording Equipment: Freedom Data PC
Coordinate Lat- 22.81188 Long- 91.51746						Borehole Information : Grouted Cased
Operator : The Olson Instruments Downhole Seismic system						Casing Diameter : 75mm PVC Casing
Time arrival (s)	Recorded Geophone Depth from Existing Ground Level (m)	Source Saint Distance (m), R	Corrected Travel Time for Compressional Wave, $t_c = D/t/R$ (s)	Interval Time, $\Delta t_s$	Shear Wave Velocity $V_s$ , $V_s = D/t_c$ (m/s)	Average Shear Wave Velocity (m/s)
<i>Existing Ground Level</i>						Graphical Representation of Vs
0.008564	-1	1.41	0.0061	0.0061	165	
0.013458	-2	2.24	0.0120	0.0060	167	
0.020478	-3	3.16	0.0194	0.0074	135	
0.027656	-4	4.12	0.0268	0.0074	135	
0.034856	-5	5.10	0.0342	0.0073	136	
0.042056	-6	6.08	0.0415	0.0073	137	
0.047859	-7	7.07	0.0474	0.0059	170	
0.052654	-8	8.06	0.0522	0.0049	205	
0.056531	-9	9.06	0.0562	0.0039	254	
0.060682	-10	10.05	0.0604	0.0042	238	
0.064916	-11	11.05	0.0646	0.0043	234	
0.069056	-12	12.04	0.0688	0.0042	240	
0.073216	-13	13.04	0.0730	0.0042	239	
0.077215	-14	14.04	0.0770	0.0040	249	
0.081153	-15	15.03	0.0810	0.0040	253	
0.084936	-16	16.03	0.0848	0.0038	263	
0.088756	-17	17.03	0.0886	0.0038	261	
0.092856	-18	18.03	0.0927	0.0041	243	
0.096985	-19	19.03	0.0969	0.0041	242	
0.101426	-20	20.02	0.1013	0.0044	225	
0.105826	-21	21.02	0.1057	0.0044	227	
0.110156	-22	22.02	0.1100	0.0043	231	
0.114826	-23	23.02	0.1147	0.0047	214	
0.118946	-24	24.02	0.1188	0.0041	242	
0.123249	-25	25.02	0.1232	0.0043	232	
0.127267	-26	26.02	0.1272	0.0040	249	
0.131461	-27	27.02	0.1314	0.0042	238	
0.135482	-28	28.02	0.1354	0.0040	248	
0.139457	-29	29.02	0.1394	0.0040	251	
0.143512	-30	30.02	0.1434	0.0041	246	

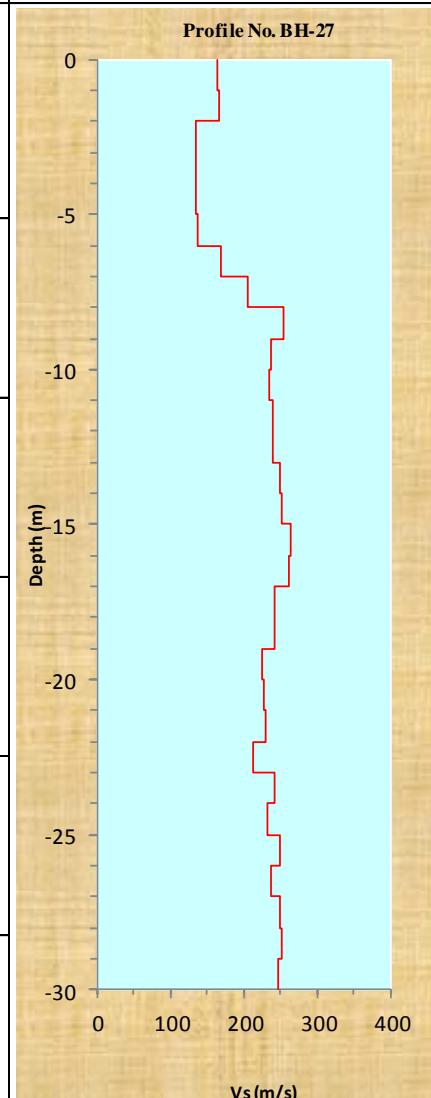


### SHEAR WAVE VELOCITY MEASUREMENTS DOWNHOLE SEISMIC TEST (PS LOGGING)

Tested Date(dd/mm/yyyy) : 22/02/2018						Source : 7kg Sledge Hammer
Location : Vanguni Bazar Baitunnur Jame Mmosque, Ichakhali						Downhole Receiver : Tri-axial Geophone
PS Id : 8/BH-35						Recording Equipment: Freedom Data PC
Coordinate Lat- 22.82661 Long- 91.48335						Borehole Information : Grouted Cased
Operator : The Olson Instruments Downhole Seismic system						Casing Diameter : 75mm PVC Casing
Time arrival (s)	Recorded Geophone Depth from Existing Ground Level (m)	Source Saint Distance (m), R	Corrected Travel Time for Compressional Wave, $t_c = D/t/R$ (s)	Interval Time, $\Delta t_s$	Shear Wave Velocity $V_s$ , $V_s = D/t_c$ (m/s)	Average Shear Wave Velocity (m/s)
<i>Existing Ground Level</i>						Graphical Representation of Vs
0.019908	-1	1.41	0.0141	0.0141	71	AVS 5
0.025952	-2	2.24	0.0232	0.0091	109	100
0.035450	-3	3.16	0.0336	0.0104	96	
0.042358	-4	4.12	0.0411	0.0075	134	
0.050993	-5	5.10	0.0500	0.0089	112	
0.058764	-6	6.08	0.0580	0.0080	126	
0.063081	-7	7.07	0.0624	0.0045	223	
0.068262	-8	8.06	0.0677	0.0053	189	
0.075170	-9	9.06	0.0747	0.0070	143	
0.080351	-10	10.05	0.0800	0.0052	191	
0.084668	-11	11.05	0.0843	0.0044	229	
0.088986	-12	12.04	0.0887	0.0044	229	
0.095030	-13	13.04	0.0948	0.0061	165	
0.099347	-14	14.04	0.0991	0.0043	230	
0.106255	-15	15.03	0.1060	0.0069	144	
0.111436	-16	16.03	0.1112	0.0052	192	
0.115753	-17	17.03	0.1156	0.0043	231	
0.118344	-18	18.03	0.1182	0.0026	383	
0.121798	-19	19.03	0.1216	0.0035	288	
0.126979	-20	20.02	0.1268	0.0052	193	
0.132159	-21	21.02	0.1320	0.0052	193	
0.136477	-22	22.02	0.1363	0.0043	231	
0.141658	-23	23.02	0.1415	0.0052	193	
0.145112	-24	24.02	0.1450	0.0035	289	
0.149429	-25	25.02	0.1493	0.0043	231	
0.154610	-26	26.02	0.1545	0.0052	193	
0.158064	-27	27.02	0.1580	0.0035	289	
0.160654	-28	28.02	0.1606	0.0026	385	
0.162381	-29	29.02	0.1623	0.0017	577	
0.164108	-30	30.02	0.1640	0.0017	577	

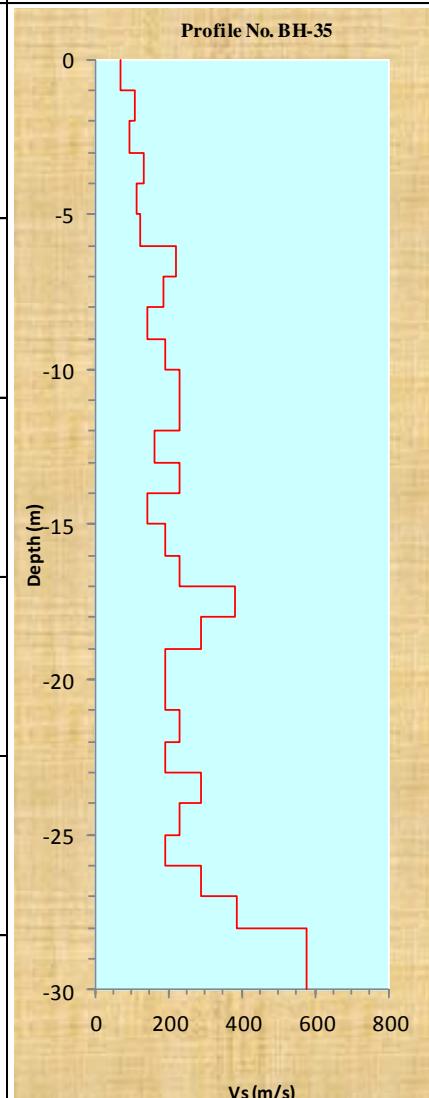


### SHEAR WAVE VELOCITY MEASUREMENTS DOWNHOLE SEISMIC TEST (PS LOGGING)

Tested Date(dd/mm/yyyy) : 28/02/2018 Location : East Ambaria, Mirsharai  PS Id : 9/BH-48 Coordinate Lat- 22.7794 Long- 91.59575 Operator : The Olson Instruments Downhole Seismic system						Source : 7kg Sledge Hammer Downhole Receiver : Tri-axial Geophone  Recording Equipment: Freedom Data PC Borehole Information : Grouted Cased Casing Diameter : 75mm PVC Casing	
Time arrival (s)	Recorded Geophone Depth from Existing Ground Level (m)	Source Saint Distance (m), R	Corrected Travel Time for Compressional Wave, $t_c = D/t/R$ (s)	Interval Time, $\Delta t_s$	Shear Wave Velocity $V_s$ , $V_s = D/t_c$ (m/s)	Average Shear Wave Velocity (m/s)	Graphical Representation of Vs
<i>Existing Ground Level</i>							
0.012144	-1	1.41	0.0086	0.0086	116	AVS 5	225
0.014279	-2	2.24	0.0128	0.0042	239		
0.017334	-3	3.16	0.0164	0.0037	272		
0.020794	-4	4.12	0.0202	0.0037	268		
0.022659	-5	5.10	0.0222	0.0020	489		
0.025119	-6	6.08	0.0248	0.0026	391		
0.027714	-7	7.07	0.0274	0.0027	376		
0.030309	-8	8.06	0.0301	0.0026	379		
0.032904	-9	9.06	0.0327	0.0026	381		
0.035499	-10	10.05	0.0353	0.0026	382		
0.041554	-11	11.05	0.0414	0.0061	165		
0.045014	-12	12.04	0.0449	0.0035	288		
0.049339	-13	13.04	0.0492	0.0043	231		
0.051934	-14	14.04	0.0518	0.0026	383		
0.056259	-15	15.03	0.0561	0.0043	231		
0.059719	-16	16.03	0.0596	0.0035	288		
0.064044	-17	17.03	0.0639	0.0043	231		
0.067504	-18	18.03	0.0674	0.0035	288		
0.071828	-19	19.03	0.0717	0.0043	231		
0.076153	-20	20.02	0.0761	0.0043	231		
0.078748	-21	21.02	0.0787	0.0026	384		
0.082208	-22	22.02	0.0821	0.0035	289		
0.085668	-23	23.02	0.0856	0.0035	289		
0.089128	-24	24.02	0.0891	0.0035	289		
0.093453	-25	25.02	0.0934	0.0043	231		
0.096048	-26	26.02	0.0960	0.0026	385		
0.099508	-27	27.02	0.0994	0.0035	289		
0.103833	-28	28.02	0.1038	0.0043	231		
0.108158	-29	29.02	0.1081	0.0043	231		
0.111618	-30	30.02	0.1116	0.0035	289		

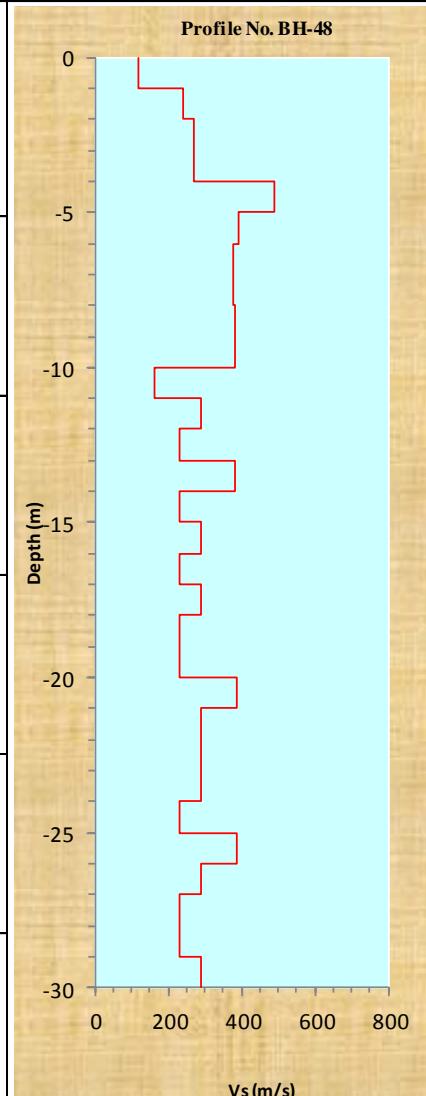


### SHEAR WAVE VELOCITY MEASUREMENTS DOWNHOLE SEISMIC TEST (PS LOGGING)

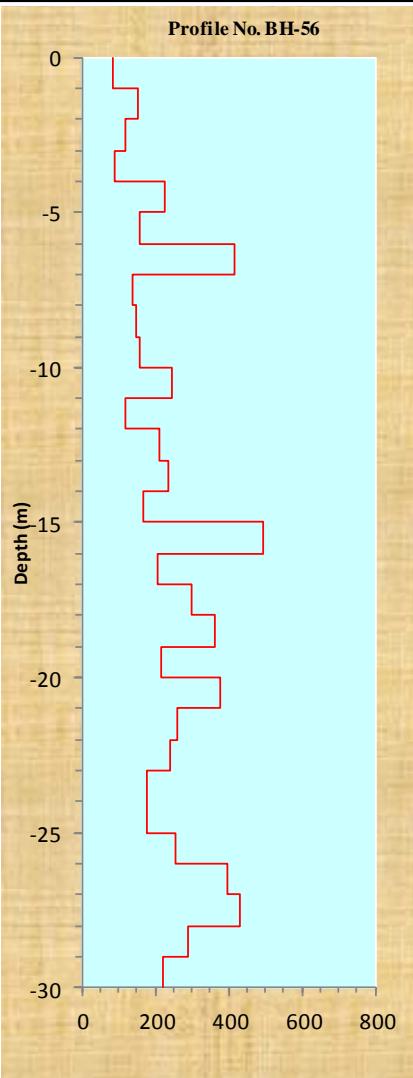Tested Date(dd/mm/yyyy) : 24/02/2018 Location : Hazi Badiul Alam Chowdhury Govt. Primary School, Mithanala PS Id : 10/BH-56 Coordinate Lat- 22.78397 Long- 91.53249 Operator : The Olson Instruments Downhole Seismic system						Source : 7kg Sledge Hammer Downhole Receiver : Tri-axial Geophone Recording Equipment: Freedom Data PC Borehole Information : Grouted Cased Casing Diameter : 75mm PVC Casing	
Time arrival (s)	Recorded Geophone Depth from Existing Ground Level (m)	Source Saint Distance (m), R	Corrected Travel Time for Compressional Wave, $t_c = D/t/R$ (s)	Interval Time, $\Delta t_s$	Shear Wave Velocity $V_s$ , $V_s = D/t_c$ (m/s)	Average Shear Wave Velocity (m/s)	Graphical Representation of Vs
<i>Existing Ground Level</i>							
0.016927	-1	1.41	0.0120	0.0120	84	AVS 5 AVS 10 AVS 15 AVS 20 AVS 25 AVS 30	<b>Profile No. BH-56</b> 
0.020683	-2	2.24	0.0185	0.0065	153		
0.028545	-3	3.16	0.0271	0.0086	117		
0.039363	-4	4.12	0.0382	0.0111	90		
0.043470	-5	5.10	0.0426	0.0044	225		
0.049680	-6	6.08	0.0490	0.0064	157		
0.051933	-7	7.07	0.0514	0.0024	415		
0.059044	-8	8.06	0.0586	0.0072	139		
0.065655	-9	9.06	0.0653	0.0067	150		
0.071915	-10	10.05	0.0716	0.0063	159		
0.075922	-11	11.05	0.0756	0.0041	247		
0.084335	-12	12.04	0.0840	0.0084	119		
0.088992	-13	13.04	0.0887	0.0047	213		
0.093249	-14	14.04	0.0930	0.0043	234		
0.099159	-15	15.03	0.0989	0.0059	169		
0.101162	-16	16.03	0.1010	0.0020	494		
0.106019	-17	17.03	0.1058	0.0049	205		
0.109375	-18	18.03	0.1092	0.0034	297		
0.112130	-19	19.03	0.1120	0.0028	361		
0.116787	-20	20.02	0.1166	0.0047	214		
0.119441	-21	21.02	0.1193	0.0027	375		
0.123297	-22	22.02	0.1232	0.0039	259		
0.127454	-23	23.02	0.1273	0.0042	240		
0.133063	-24	24.02	0.1329	0.0056	178		
0.138772	-25	25.02	0.1387	0.0057	175		
0.142678	-26	26.02	0.1426	0.0039	256		
0.145182	-27	27.02	0.1451	0.0025	398		
0.147486	-28	28.02	0.1474	0.0023	433		
0.150941	-29	29.02	0.1509	0.0035	289		
0.155449	-30	30.02	0.1554	0.0045	222		

### SHEAR WAVE VELOCITY MEASUREMENTS DOWNHOLE SEISMIC TEST (PS LOGGING)

Tested Date(dd/mm/yyyy) : 26/02/2018						Source : 7kg Sledge Hammer
Location : 90 no. Maghadia NC Govt. Primary School, Maghadia						Downhole Receiver : Tri-axial Geophone
PS Id : 11/BH-60						Recording Equipment: Freedom Data PC
Coordinate Lat- 22.74951 Long- 91.53351						Borehole Information : Grouted Cased
Operator : The Olson Instruments Downhole Seismic system						Casing Diameter : 75mm PVC Casing
Time arrival (s)	Recorded Geophone Depth from Existing Ground Level (m)	Source Saint Distance (m), R	Corrected Travel Time for Compressional Wave, $t_c = D/t/R$ (s)	Interval Time, $\Delta t_s$	Shear Wave Velocity $V_s$ , $V_s = D/t_c$ (m/s)	Average Shear Wave Velocity (m/s)
<i>Existing Ground Level</i>						Graphical Representation of Vs
0.018103	-1	1.41	0.0128	0.0128	78	
0.024160	-2	2.24	0.0216	0.0088	114	
0.028485	-3	3.16	0.0270	0.0054	185	
0.036272	-4	4.12	0.0352	0.0082	122	
0.042328	-5	5.10	0.0415	0.0063	158	
0.050980	-6	6.08	0.0503	0.0088	114	
0.054440	-7	7.07	0.0539	0.0036	277	
0.060496	-8	8.06	0.0600	0.0061	163	
0.068283	-9	9.06	0.0679	0.0078	128	
0.073474	-10	10.05	0.0731	0.0052	191	
0.078665	-11	11.05	0.0783	0.0052	191	
0.084721	-12	12.04	0.0844	0.0061	164	
0.089047	-13	13.04	0.0888	0.0044	230	
0.095103	-14	14.04	0.0949	0.0061	165	
0.097698	-15	15.03	0.0975	0.0026	382	
0.102024	-16	16.03	0.1018	0.0043	230	
0.108080	-17	17.03	0.1079	0.0061	165	
0.113271	-18	18.03	0.1131	0.0052	192	
0.118462	-19	19.03	0.1183	0.0052	192	
0.121923	-20	20.02	0.1218	0.0035	288	
0.127114	-21	21.02	0.1270	0.0052	192	
0.132305	-22	22.02	0.1322	0.0052	192	
0.137496	-23	23.02	0.1374	0.0052	192	
0.140957	-24	24.02	0.1408	0.0035	288	
0.143552	-25	25.02	0.1434	0.0026	384	
0.149608	-26	26.02	0.1495	0.0061	165	
0.153069	-27	27.02	0.1530	0.0035	288	
0.159125	-28	28.02	0.1590	0.0061	165	
0.164316	-29	29.02	0.1642	0.0052	193	
0.166912	-30	30.02	0.1668	0.0026	384	

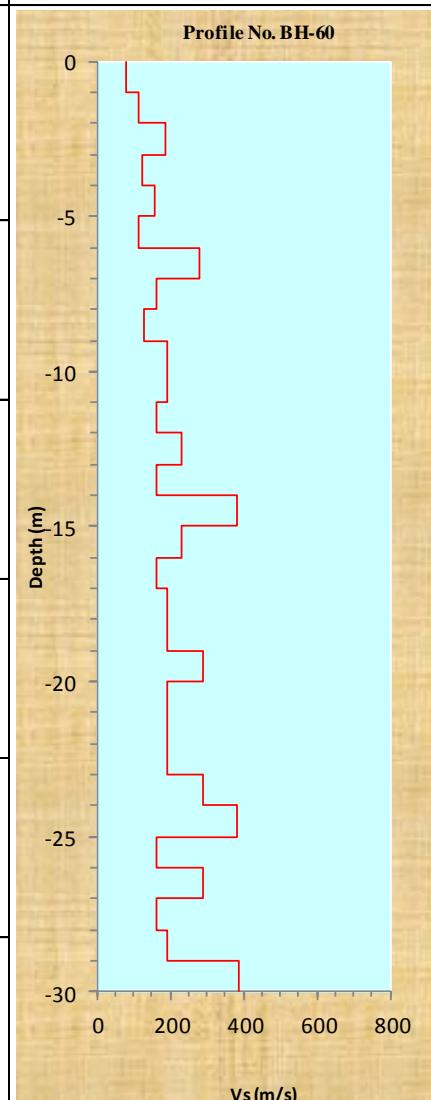


### SHEAR WAVE VELOCITY MEASUREMENTS DOWNHOLE SEISMIC TEST (PS LOGGING)


Tested Date(dd/mm/yyyy) : 26/02/2018 Location : Dhoomkhali, Shaherkhali  PS Id : 12/BH-69 Coordinate Dhoomkhali, Shaherkhali Operator : The Olson Instruments Downhole Seismic system						Source : 7kg Sledge Hammer Downhole Receiver : Tri-axial Geophone  Recording Equipment: Freedom Data PC Borehole Information : Grouted Cased Casing Diameter : 75mm PVC Casing	
Time arrival (s)	Recorded Geophone Depth from Existing Ground Level (m)	Source Saint Distance (m), R	Corrected Travel Time for Compressional Wave, $t_c = D/t/R$ (s)	Interval Time, $\Delta t_s$	Shear Wave Velocity $V_s$ , $V_s = D/t_c$ (m/s)	Average Shear Wave Velocity (m/s)	Graphical Representation of Vs
<i>Existing Ground Level</i>							
0.015498	-1	1.41	0.0110	0.0110	91		
0.019824	-2	2.24	0.0177	0.0068	148		
0.025880	-3	3.16	0.0246	0.0068	147		
0.032802	-4	4.12	0.0318	0.0073	138		
0.041454	-5	5.10	0.0406	0.0088	113		
0.050105	-6	6.08	0.0494	0.0088	114		
0.055296	-7	7.07	0.0547	0.0053	188		
0.061353	-8	8.06	0.0609	0.0061	163		
0.066544	-9	9.06	0.0661	0.0053	190		
0.070004	-10	10.05	0.0697	0.0035	284		
0.074330	-11	11.05	0.0740	0.0044	229		
0.077791	-12	12.04	0.0775	0.0035	286		
0.083847	-13	13.04	0.0836	0.0061	165		
0.090769	-14	14.04	0.0905	0.0069	144		
0.095960	-15	15.03	0.0957	0.0052	192		
0.102016	-16	16.03	0.1018	0.0061	165		
0.109803	-17	17.03	0.1096	0.0078	128		
0.114129	-18	18.03	0.1140	0.0043	230		
0.120185	-19	19.03	0.1200	0.0061	165		
0.123646	-20	20.02	0.1235	0.0035	288		
0.128837	-21	21.02	0.1287	0.0052	192		
0.133163	-22	22.02	0.1330	0.0043	231		
0.137489	-23	23.02	0.1374	0.0043	231		
0.142680	-24	24.02	0.1426	0.0052	192		
0.147871	-25	25.02	0.1478	0.0052	192		
0.154792	-26	26.02	0.1547	0.0069	144		
0.160849	-27	27.02	0.1607	0.0061	165		
						AVS 5 123	Profile No. BH-69
						AVS 10 144	
						AVS 15 157	
						AVS 20 162	
						AVS 25 169	
						AVS 27 168	

### SHEAR WAVE VELOCITY MEASUREMENTS DOWNHOLE SEISMIC TEST (PS LOGGING)


Tested Date(dd/mm/yyyy) : 28/02/2018 Location : Morjida Masima Taluk, Borotakia  PS Id : 13/BH-72 Coordinate Lat- 22.74442 Long- 91.58926 Operator : The Olson Instruments Downhole Seismic system						Source : 7kg Sledge Hammer Downhole Receiver : Tri-axial Geophone  Recording Equipment: Freedom Data PC Borehole Information : Grouted Cased Casing Diameter : 75mm PVC Casing	
Time arrival (s)	Recorded Geophone Depth from Existing Ground Level (m)	Source Saint Distance (m), R	Corrected Travel Time for Compressional Wave, $t_c = D/t/R$ (s)	Interval Time, $\Delta t_s$	Shear Wave Velocity $V_s$ , $V_s = D/t_c$ (m/s)	Average Shear Wave Velocity (m/s)	Graphical Representation of Vs
<i>Existing Ground Level</i>							
0.020098	-1	1.41	0.0142	0.0142	70	AVS 5	89
0.032181	-2	2.24	0.0288	0.0146	69		
0.040813	-3	3.16	0.0387	0.0099	101		
0.052897	-4	4.12	0.0513	0.0126	79		
0.057212	-5	5.10	0.0561	0.0048	209		
0.062391	-6	6.08	0.0615	0.0054	184		
0.064980	-7	7.07	0.0643	0.0028	359		
0.072749	-8	8.06	0.0722	0.0079	127		
0.076201	-9	9.06	0.0757	0.0035	282		
0.082243	-10	10.05	0.0818	0.0061	164		
0.087422	-11	11.05	0.0871	0.0052	191		
0.094327	-12	12.04	0.0940	0.0069	144		
0.101232	-13	13.04	0.1009	0.0069	144		
0.106411	-14	14.04	0.1061	0.0052	192		
0.112453	-15	15.03	0.1122	0.0061	165		
0.118495	-16	16.03	0.1183	0.0061	165		
0.121947	-17	17.03	0.1217	0.0035	288		
0.128852	-18	18.03	0.1287	0.0069	145		
0.130579	-19	19.03	0.1304	0.0017	573		
0.134031	-20	20.02	0.1339	0.0035	289		
0.136621	-21	21.02	0.1365	0.0026	384		
0.140936	-22	22.02	0.1408	0.0043	231		
0.145252	-23	23.02	0.1451	0.0043	231		
0.147841	-24	24.02	0.1477	0.0026	385		
0.153883	-25	25.02	0.1538	0.0060	165		
0.155609	-26	26.02	0.1555	0.0017	577		
0.158199	-27	27.02	0.1581	0.0026	385		
0.160788	-28	28.02	0.1607	0.0026	385		
0.163378	-29	29.02	0.1633	0.0026	385		
0.168556	-30	30.02	0.1685	0.0052	193		

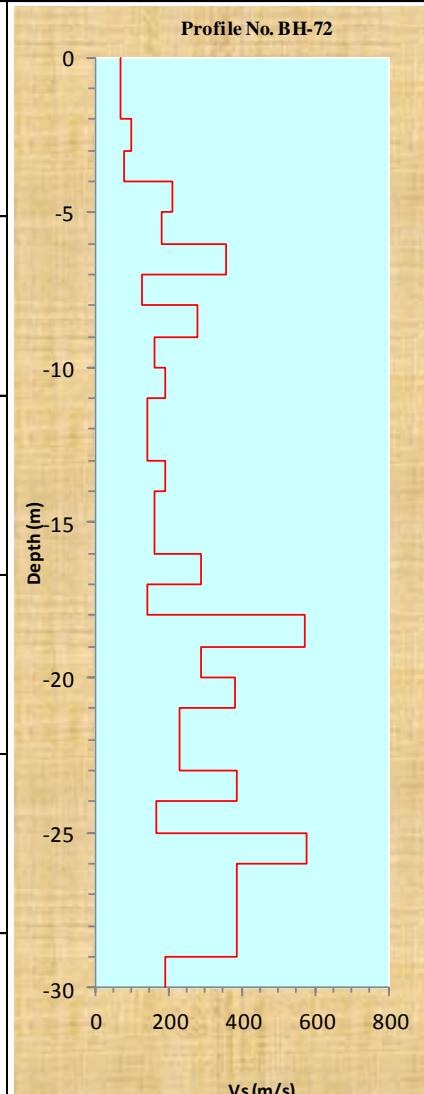

### SHEAR WAVE VELOCITY MEASUREMENTS DOWNHOLE SEISMIC TEST (PS LOGGING)

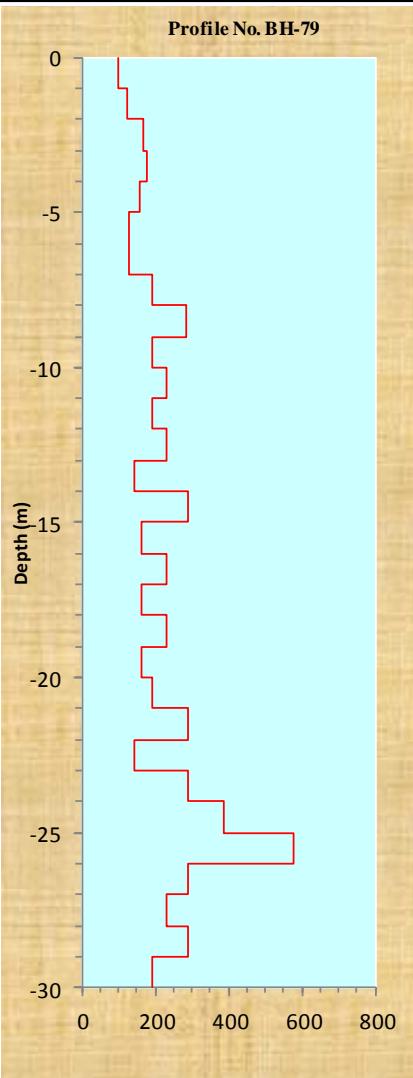Tested Date(dd/mm/yyyy) : 28/02/2018 Location : West Wahedpur Molla para Mosque  PS Id : 14/BH-79 Coordinate Lat- 22.7002 Long- 91.62035 Operator : The Olson Instruments Downhole Seismic system						Source : 7kg Sledge Hammer Downhole Receiver : Tri-axial Geophone  Recording Equipment: Freedom Data PC Borehole Information : Grouted Cased Casing Diameter : 75mm PVC Casing	
Time arrival (s)	Recorded Geophone Depth from Existing Ground Level (m)	Source Saint Distance (m), R	Corrected Travel Time for Compressional Wave, $t_c = D/t/R$ (s)	Interval Time, $\Delta t_s$	Shear Wave Velocity $V_s$ , $V_s = D/t_c$ (m/s)	Average Shear Wave Velocity (m/s)	Graphical Representation of Vs
<i>Existing Ground Level</i>							
0.013952	-1	1.41	0.0099	0.0099	101	AVS 5 140	<b>Profile No. BH-79</b> 
0.020006	-2	2.24	0.0179	0.0080	125		
0.025195	-3	3.16	0.0239	0.0060	166		
0.030385	-4	4.12	0.0295	0.0056	179		
0.036439	-5	5.10	0.0357	0.0063	160		
0.044222	-6	6.08	0.0436	0.0079	127		
0.052006	-7	7.07	0.0515	0.0079	127		
0.057195	-8	8.06	0.0568	0.0053	190		
0.060654	-9	9.06	0.0603	0.0035	283		
0.065844	-10	10.05	0.0655	0.0052	191		
0.070168	-11	11.05	0.0699	0.0044	229		
0.075357	-12	12.04	0.0751	0.0052	192		
0.079681	-13	13.04	0.0794	0.0043	230		
0.086600	-14	14.04	0.0864	0.0069	144		
0.090059	-15	15.03	0.0899	0.0035	287		
0.096113	-16	16.03	0.0959	0.0061	165		
0.100438	-17	17.03	0.1003	0.0043	230		
0.106492	-18	18.03	0.1063	0.0061	165		
0.110816	-19	19.03	0.1107	0.0043	231		
0.116870	-20	20.02	0.1167	0.0061	165		
0.122059	-21	21.02	0.1219	0.0052	192		
0.125518	-22	22.02	0.1254	0.0035	288		
0.132437	-23	23.02	0.1323	0.0069	144		
0.135897	-24	24.02	0.1358	0.0035	288		
0.138491	-25	25.02	0.1384	0.0026	384		
0.140221	-26	26.02	0.1401	0.0017	576		
0.143680	-27	27.02	0.1436	0.0035	289		
0.148005	-28	28.02	0.1479	0.0043	231		
0.151464	-29	29.02	0.1514	0.0035	289		
0.156653	-30	30.02	0.1566	0.0052	193		

### SHEAR WAVE VELOCITY MEASUREMENTS DOWNHOLE SEISMIC TEST (PS LOGGING)

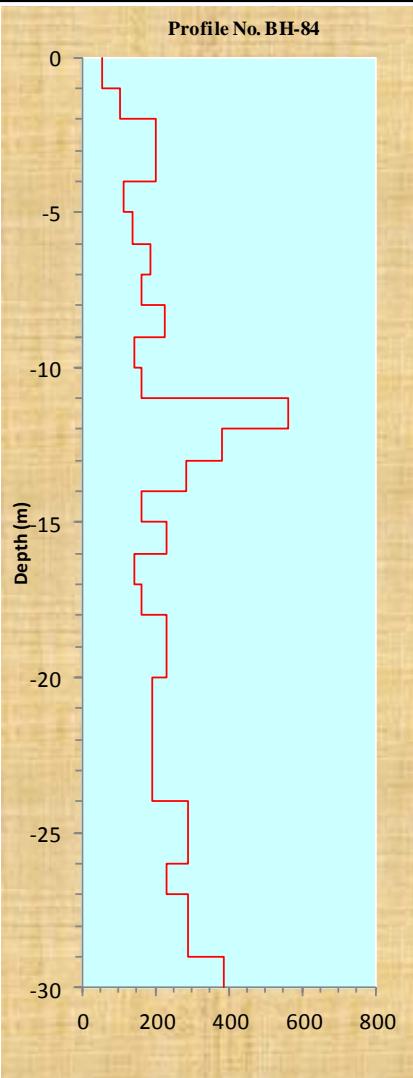Tested Date(dd/mm/yyyy) : 26/02/2018 Location : South Baliadi Govt. Primary School  PS Id : 15/BH-84 Coordinate Lat- 22.67191 Long- 91.60059 Operator : The Olson Instruments Downhole Seismic system						Source : 7kg Sledge Hammer Downhole Receiver : Tri-axial Geophone  Recording Equipment: Freedom Data PC Borehole Information : Grouted Cased Casing Diameter : 75mm PVC Casing	
Time arrival (s)	Recorded Geophone Depth from Existing Ground Level (m)	Source Saint Distance (m), R	Corrected Travel Time for Compressional Wave, $t_c = D/t/R$ (s)	Interval Time, $\Delta t_s$	Shear Wave Velocity $V_s$ , $V_s = D/t_c$ (m/s)	Average Shear Wave Velocity (m/s)	Graphical Representation of Vs
<i>Existing Ground Level</i>							
0.026687	-1	1.41	0.0189	0.0189	53	AVS 5 AVS 10 AVS 15 AVS 20 AVS 25 AVS 30	<b>Profile No. BH-84</b> 
0.031878	-2	2.24	0.0285	0.0096	104		
0.035340	-3	3.16	0.0335	0.0050	199		
0.039666	-4	4.12	0.0385	0.0050	202		
0.048319	-5	5.10	0.0474	0.0089	112		
0.055241	-6	6.08	0.0545	0.0071	141		
0.060433	-7	7.07	0.0598	0.0053	187		
0.066490	-8	8.06	0.0660	0.0062	163		
0.070816	-9	9.06	0.0704	0.0044	227		
0.077739	-10	10.05	0.0774	0.0070	143		
0.083796	-11	11.05	0.0835	0.0061	164		
0.085526	-12	12.04	0.0852	0.0018	562		
0.088122	-13	13.04	0.0879	0.0026	380		
0.091583	-14	14.04	0.0914	0.0035	287		
0.097640	-15	15.03	0.0974	0.0061	165		
0.101967	-16	16.03	0.1018	0.0043	230		
0.108889	-17	17.03	0.1087	0.0069	144		
0.114946	-18	18.03	0.1148	0.0061	165		
0.119273	-19	19.03	0.1191	0.0043	230		
0.123599	-20	20.02	0.1234	0.0043	231		
0.128791	-21	21.02	0.1286	0.0052	192		
0.133982	-22	22.02	0.1338	0.0052	192		
0.139174	-23	23.02	0.1390	0.0052	192		
0.144366	-24	24.02	0.1442	0.0052	192		
0.147827	-25	25.02	0.1477	0.0035	288		
0.151288	-26	26.02	0.1512	0.0035	288		
0.155615	-27	27.02	0.1555	0.0043	231		
0.159076	-28	28.02	0.1590	0.0035	288		
0.162537	-29	29.02	0.1624	0.0035	289		
0.165133	-30	30.02	0.1650	0.0026	384		

## APPENDIX E: PHOTOGRAPHIC REPRESENTATION OF MICROTREMOR SURVEY WORK



**MT Serial No.- MT-01**

**Location:** Ichakhali, Shahebjir Nagar

**Coordinates:** Lat- 22.82828 Long- 91.48392



**MT Serial No.- MT-02**

**Location:** Vaggoni, Ichakhai

**Coordinates:** Lat- 22.82186 Long- 91.46932



**MT Serial No.- MT-03**

**Location:** Susham Khal, Ichakhai

**Coordinates:** Lat- 22.8049 Long- 91.4759



**MT Serial No.- MT-04**  
**Location: Bariakhali, Katachhara**  
Coordinates: Lat- 22.89708 Long- 91.51891



**MT Serial No.- MT-05**  
**Location: Ganakchara, Dhum**  
Coordinates: Lat- 22.89708 Long- 91.51891



**MT Serial No.- MT-06**  
**Location: Moulavi bazaar, Dhum**  
Coordinates: Lat- 22.88233 Long- 91.49981



**MT Serial No.- MT-07**  
**Location: Naherpur, Dhum**  
Coordinates: Lat- 22.87548 Long- 91.51395



**MT Serial No.- MT-08**  
**Location: Shahedpur, Zorwarganj**  
Coordinates: Lat- 22.85102 Long- 91.50626



**MT Serial No.- MT-09**  
**Location: Azampur, Osmanpur**  
Coordinates: Lat- 22.85918 Long- 91.47164



**MT Serial No.- MT-10**  
**Location: Hariharpur, Durgapur**  
Coordinates: Lat- 22.82668 Long- 91.54601



**MT Serial No.- MT-11**  
**Location: Massapukur, Kattachara**  
Coordinates: Lat- 22.80993 Long- 91.52605



**MT Serial No.- MT-12**  
**Location: Middle Mithanala, Mithanala**  
Coordinates: Lat- 22.67615 Long- 91.61485



**MT Serial No.- MT-13**  
**Location:** Mohalonga, Wahedpur  
**Coordinates:** Lat- 22.67615 Long- 91.61485



**MT Serial No.- MT-14**  
**Location:** Uttar bogachotor, Saherkhali  
**Coordinates:** Lat- 22.68321 Long- 91.57845



**MT Serial No.- MT-15**  
**Location:** Dhumkhali, Saherkhali  
**Coordinates:** Lat- 22.69414 Long- 91.55822



**MT Serial No.- MT-16**

**Location:** Abdul Qaium Road, Shaherkhali

**Coordinates:** Lat- 22.71064 Long- 91.55281



**MT Serial No.- MT-17**

**Location:** Kaochua, Haitkandi

**Coordinates:** Lat- 22.70942 Long- 91.59045



**MT Serial No.- MT-18**

**Location:** Gasbaria, Khaiyachhara

**Coordinates:** Lat- 22.72967 Long- 91.59424



**MT Serial No.- MT-19**

**Location: Sayedali, Khaiyachhara**

Coordinates: Lat- 22.75081 Long- 91.57513



**MT Serial No.- MT-20**

**Location: Jafrabad, Maghadia**

Coordinates: Lat- 22.74328 Long- 91.53533



**MT Serial No.- MT-21**

**Location: Chorsorod, Maghadia**

Coordinates: Lat- 22.74333 Long- 91.4929



**MT Serial No.- MT-22**

**Location: Rahmatabad, Ichhakhali**

Coordinates: Lat- 22.77437 Long- 91.4959



**MT Serial No.- MT-23**

**Location: Mirsharai**

Coordinates: Lat- 22.90558 Long- 91.55914



**MT Serial No.- MT-24**

**Location: Islampur, Hinguli**

Coordinates: Lat- 22.90558 Long- 91.55914



**MT Serial No.- MT-25**

**Location:** Taltola, Hinguli

**Coordinates:** Lat- 22.91181 Long- 91.54565



**MT Serial No.- MT-26**

**Location:** Katagong, Karerhat

**Coordinates:** Lat- 22.92955 Long- 91.5402



**MT Serial No.- MT-27**

**Location:** Nolkho, Karerhat

**Coordinates:** Lat- 22.93118 Long- 91.59286



**MT Serial No.- MT-28**

**Location:** West Olinagar, Karerhat

**Coordinates:** Lat- 22.9492 Long- 91.56968



**MT Serial No.- MT-29**

**Location:** Khilmurali, Zorwargonj

**Coordinates:** Lat-22.88085 Long- 91.54734






**MT Serial No.- MT-30**

**Location:** Mohanagar, Zorwargonj

**Coordinates:** Lat- 22.85004 Long- 91.53926

## APPENDIX F: SINGLE MICROTREMOR TEST RESULTS AND GRAPHS




File: C2211050.TXT	<p>H/V Plot for cd.csv</p> <p>Y-axis: H/V amplitude (log scale from 10<sup>-1</sup> to 10) X-axis: Period t, sec (log scale from 10<sup>-1</sup> to 10)</p> <p>Legend: NS/UD (blue), EW/UD (red), Average (cyan)</p>	
Location		
<b>MT Serial No.- MT-01</b>	<p>H/V Plot for cd.csv</p> <p>Y-axis: H/V amplitude (log scale from 10<sup>-1</sup> to 10) X-axis: Period t, sec (log scale from 10<sup>-1</sup> to 10)</p> <p>Legend: NS/UD (blue), EW/UD (red), Average (cyan)</p>	
<b>Location: Ichakhali, Shahebjir Nagar</b>	<p>H/V Plot for cd.csv</p> <p>Y-axis: H/V amplitude (log scale from 10<sup>-1</sup> to 10) X-axis: Period t, sec (log scale from 10<sup>-1</sup> to 10)</p> <p>Legend: NS/UD (blue), EW/UD (red), Average (cyan)</p>	
Lat - 22.82828	Peak Period 0.90sec	
Long - 91.48392	Peak Amplitude 3.0	
File: C2211333.TXT	<p>H/V Plot for cd.csv</p> <p>Y-axis: H/V amplitude (log scale from 10<sup>-1</sup> to 10) X-axis: Period t, sec (log scale from 10<sup>-1</sup> to 10)</p> <p>Legend: NS/UD (blue), EW/UD (red), Average (cyan)</p>	
Location		
<b>MT Serial No.- MT-02</b>	<p>H/V Plot for cd.csv</p> <p>Y-axis: H/V amplitude (log scale from 10<sup>-1</sup> to 10) X-axis: Period t, sec (log scale from 10<sup>-1</sup> to 10)</p> <p>Legend: NS/UD (blue), EW/UD (red), Average (cyan)</p>	
<b>Location: Ichakhai</b>	<p>H/V Plot for cd.csv</p> <p>Y-axis: H/V amplitude (log scale from 10<sup>-1</sup> to 10) X-axis: Period t, sec (log scale from 10<sup>-1</sup> to 10)</p> <p>Legend: NS/UD (blue), EW/UD (red), Average (cyan)</p>	
Lat - 22.82186	Peak Period 1.0 sec	
Long - 91.46932	Peak Amplitude 2.3	
File: C2211527.TXT	<p>H/V Plot for bc.csv</p> <p>Y-axis: H/V amplitude (log scale from 10<sup>-1</sup> to 10) X-axis: Period t, sec (log scale from 10<sup>-1</sup> to 10)</p> <p>Legend: NS/UD (blue), EW/UD (red), Average (cyan)</p>	
Location		
<b>MT Serial No.- MT-03</b>	<p>H/V Plot for bc.csv</p> <p>Y-axis: H/V amplitude (log scale from 10<sup>-1</sup> to 10) X-axis: Period t, sec (log scale from 10<sup>-1</sup> to 10)</p> <p>Legend: NS/UD (blue), EW/UD (red), Average (cyan)</p>	
<b>Location: Ichakhai</b>	<p>H/V Plot for bc.csv</p> <p>Y-axis: H/V amplitude (log scale from 10<sup>-1</sup> to 10) X-axis: Period t, sec (log scale from 10<sup>-1</sup> to 10)</p> <p>Legend: NS/UD (blue), EW/UD (red), Average (cyan)</p>	
Lat - 22.8049	Peak Period 0.8sec	
Long - 91.4759	Peak Amplitude 2.5	

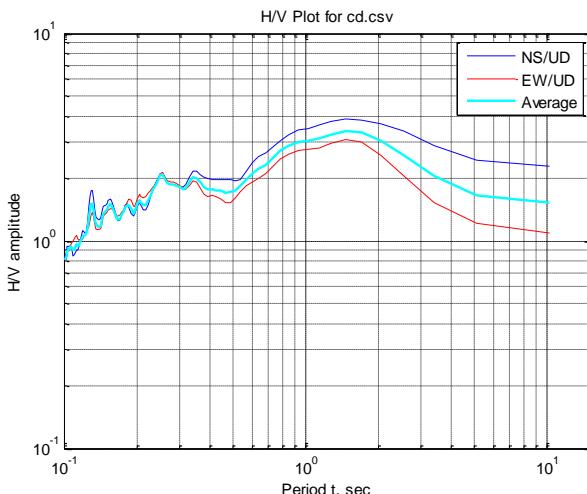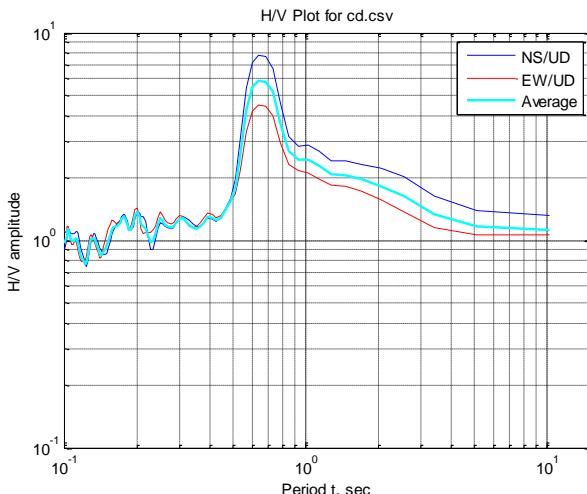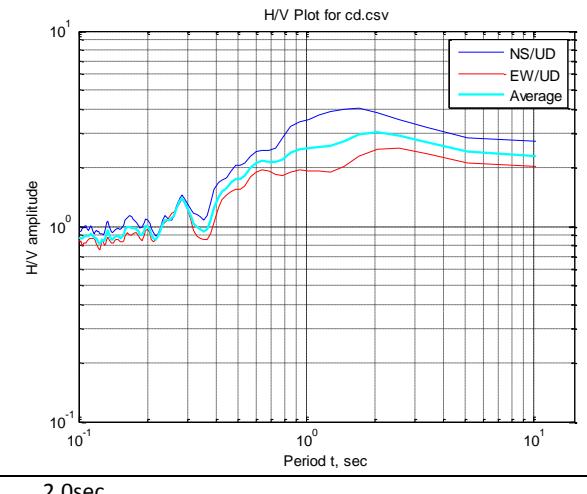File: C2211601.TXT		
Location		
<b>MT Serial No.- MT-04</b>		
<b>Location: Bariakhali</b>		
Lat - 22.79454	Peak Period	1.5sec
Long - 91.47306	Peak Amplitude	3.2
File: C2220957.TXT		
Location		
<b>MT Serial No.- MT-05</b>		
<b>Location:</b>		
<b>Ganakchara</b>		
Lat - 22.89708	Peak Period	0.7 sec
Long - 91.51891	Peak Amplitude	
File: C2221050.TXT		
Location		
<b>MT Serial No.- MT-06</b>		
<b>Location: Dhoom</b>		
Lat - 22.88233	Peak Period	2.0sec
Long - 91.49981	Peak Amplitude	3.0

File: C2221130.TXT		
Location	<b>MT Serial No.- MT-07</b> <b>Location: Naherpur, Dhum Union</b>	
Lat - 22.87548	Peak Period	0.7sec
Long - 91.51395	Peak Amplitude	
File: C2221210.TXT		
Location	<b>MT Serial No.- MT-08</b> <b>Location: Shahedpur</b>	
Lat - 22.85102	Peak Period	0.6 sec
Long - 91.50626	Peak Amplitude	2.0
File: C2221255.TXT		
Location	<b>MT Serial No.- MT-09</b> <b>Location: Azampur</b>	
Lat - 22.85918	Peak Period	1.0sec
Long - 91.47164	Peak Amplitude	2.0




File: C2221359.TXT		
Location	<b>MT Serial No.- MT-10</b> <b>Location:</b> <b>Harihpur</b>	
Lat - 22.82668	Peak Period	2.5sec
Long - 91.54601	Peak Amplitude	3.5
File: C2221441.TXT		
Location	<b>MT Serial No.- MT-11</b> <b>Location:</b> <b>Massapukur,</b> <b>Kattachara Union</b>	
Lat - 22.80993	Peak Period	0.65 sec
Long - 91.52605	Peak Amplitude	2.1
File: C2221518.TXT		
Location	<b>MT Serial No.- MT-12</b> <b>Location: Middle</b> <b>Mithanala</b>	
Lat - 22.79855	Peak Period	0.65sec
Long - 91.50579	Peak Amplitude	2.1

File: 12230925.TXT		
Location <b>MT Serial No.- MT-13</b> <b>Location:</b> <b>Mohalonga</b>		
Lat- 22.67615	Peak Period	2sec
Long- 91.61485	Peak Amplitude	2.5
File: 12231016.TXT		
Location <b>MT Serial No.- MT-14</b> <b>Location: Uttar bogachotor</b>		
Lat- 22.68321	Peak Period	2sec
Long- 91.57845	Peak Amplitude	2.8
File: 12231059.TXT		
Location <b>MT Serial No.- MT-15</b> <b>Location:</b> <b>Dhumkhali</b>		
Lat- 22.69414	Peak Period	1sec
Long- 91.55822	Peak Amplitude	1.5

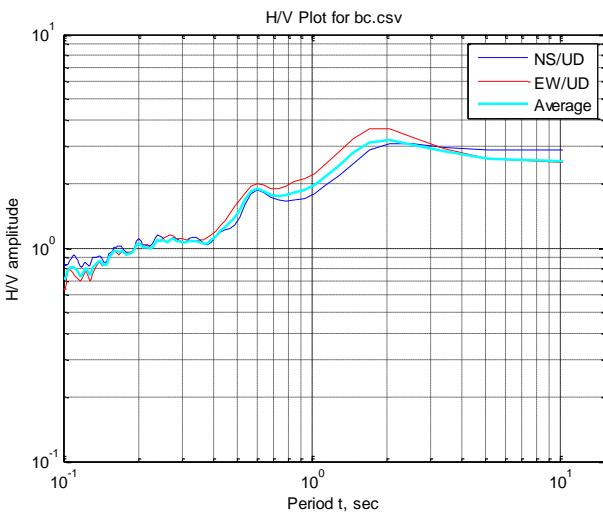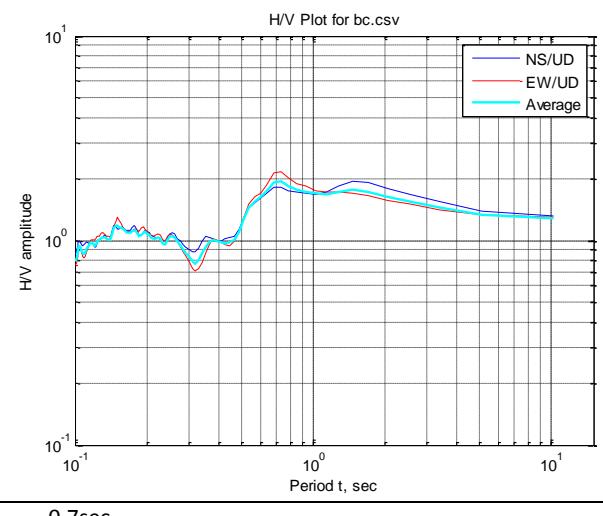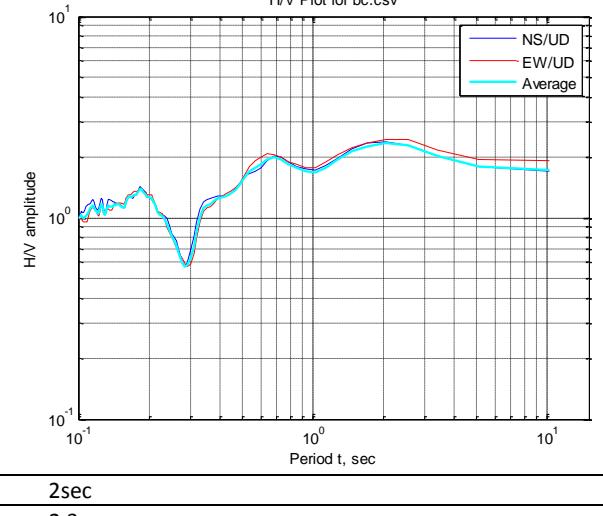File: 12231154.TXT		
Location <b>MT Serial No.- MT-16</b> <b>Location:</b> <b>Shaherkhali</b>		
Lat- 22.71064	Peak Period	2sec
Long- 91.55281	Peak Amplitude	3.0
12231239.TXT		
Location <b>MT Serial No.- MT-17</b> <b>Location:</b> <b>Kaochua</b>		
Lat- 22.70942	Peak Period	0.7sec
Long- 91.59045	Peak Amplitude	2.0
12231352.TXT		
Location <b>MT Serial No.- MT-18</b> <b>Location:</b> <b>Gasbaria</b>		
Lat- 22.72967	Peak Period	2sec
Long - 91.59424	Peak Amplitude	2.3

File: 12231439.TXT		
Location <b>MT Serial No.- MT-19</b> <b>Location: Sayed ali</b>		
Lat - 22.75081	Peak Period	0.65sec
Long - 91.57513	Peak Amplitude	2.2
File: 12231521.TXT		
Location <b>MT Serial No.- MT-20</b> <b>Location: Jafrabad</b>		
Lat - 22.74328	Peak Period	2sec
Long - 91.53533	Peak Amplitude	2.5
File: 12231607.TXT		
Location <b>MT Serial No.- MT-21</b> <b>Location: Chorsorod</b>		
Lat - 22.74333	Peak Period	2.0sec
Long - 91.4929	Peak Amplitude	2.5

File: 12231704.TXT		
Location <b>MT Serial No.- MT-22</b> <b>Location:</b> <b>Rahmatabad</b>		
Lat - 22.77437	Peak Period	0.60sec
Long - 91.4959	Peak Amplitude	2.0
File: 12231746.TXT		
Location <b>MT Serial No.- MT-23</b> <b>Location:</b> <b>Mirsharai</b>		
Lat - 22.80128	Peak Period	2sec
Long - 91.53653	Peak Amplitude	1.8
File: 12240905.TXT		
Location <b>MT Serial No.- MT-24</b> <b>Location:</b> <b>Islampur</b>		
Lat - 22.90558	Peak Period	2.0sec
Long - 91.55914	Peak Amplitude	3.0

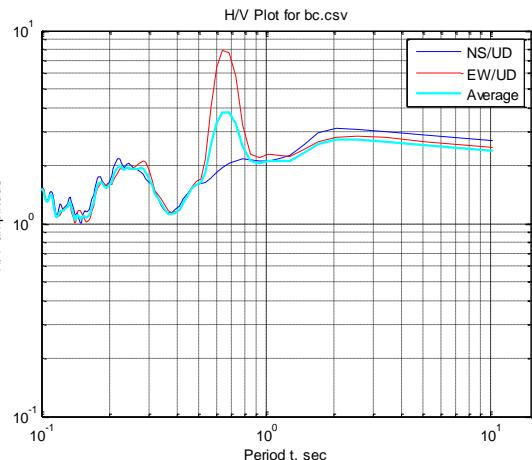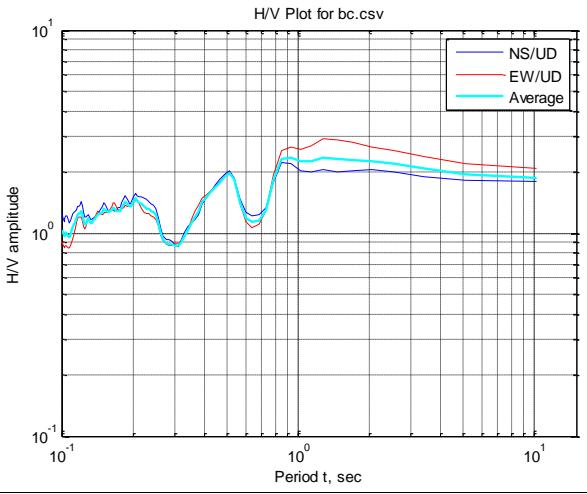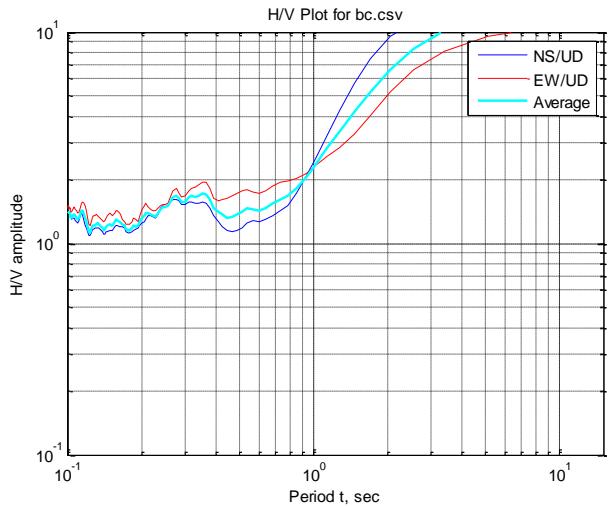File: 12240940.TXT		
Location		
<b>MT Serial No.- MT-25</b>		
<b>Location: Taltola</b>		
Lat - 22.91181	Peak Period	0.60sec
Long - 91.54565	Peak Amplitude	3.5
File: 12241028.TXT		
Location		
<b>MT Serial No.- MT-26</b>		
<b>Location: Katagong</b>		
Lat - 22.92955	Peak Period	0.9 sec
Long - 91.5402	Peak Amplitude	2.1
File: 12241105.TXT		
Location		
<b>MT Serial No.- MT-27</b>		
<b>Location: Nolkho</b>		
Lat - 22.93118	Peak Period	1.0sec
Long - 91.59286	Peak Amplitude	2.1

File: 12241214.TXT		
Location		
<b>MT Serial No.- MT-28</b> <b>Location: West Olinagar</b>		
Lat - 22.9492	Peak Period	2.0sec
Long - 91.56968	Peak Amplitude	2.0sec
File: 12241312.TXT		
Location		
<b>MT Serial No.- MT-29</b> <b>Location:</b> <b>Khilmurali,</b> <b>Jorawargonj</b>		
Lat - 22.88085	Peak Period	0.8 sec
Long - 91.54734	Peak Amplitude	2.2
File: 12241404.TXT		
Location		
<b>MT Serial No.- MT-30</b> <b>Location:</b> <b>Mohanagar</b>		
Lat - 22.85004	Peak Period	0.7sec
Long - 91.53926	Peak Amplitude	1.8

## APPENDIX G: PHOTOGRAPHIC REPRESENTATION OF GEOTECHNICAL SURVEY (BOREHOLE LOGGING) WORK







	
	<p>Bore hole No: BH-M07 Location : Khilhinguli Govt. Primary School Coordinates: Lat- 22.89774 Long- 91.5464</p>

	
	<p>Bore hole No: BH-M08 Location : Jamalpur, Baraiarhat Pourashava Coordinates: Lat- 22.89317 Long- 91.5297</p>

	
	<p>Bore hole No: BH-M09 Location : East Mehedi Nagar (Forrest Office) Coordinates: Lat- 22.88751 Long- 91.55489</p>

	
	<p>Bore hole No: BH-M10 Location : West Hinguli, Gonokchora Coordinates: Lat- 22.90032 Long- 91.52085</p>











	
	<p>Bore hole No: BH-M21 Location : East MoregangJame Mosque, Osmanpur <b>Coordinates: Lat- 22.87252 Long- 91.49651</b></p>

	
	<p>Bore hole No: BH-M22 Location : Patacoat, Azampur, Osmanpur <b>Coordinates: Lat- 22.85292 Long- 91.48433</b></p>

	
	<p>Bore hole No: BH-M23 Location : 68 north durgapur Primary School, Varoddaj hat <b>Coordinates: Lat- 22.81511 Long- 91.54094</b></p>

	
	<p>Bore hole No: BH-M24 Location : East RaypurBaitulAmanJame Mosque, Durgapur <b>Coordinates: Lat- 22.83193 Long- 91.55396</b></p>



	
	<p>Bore hole No: BH-M27 Location : AbdusSattarBhuiyar Hat Govt. Primary school, Kata chora <b>Coordinates: Lat- 22.81188 Long- 91.51746</b></p>

	
	<p>Bore hole No: BH-M28 Location : BamonShundor Govt. Primary School, Kata Chora <b>Coordinates: Lat- 22.79988 Long- 91.51379</b></p>













Bore hole No: BH-M39  
Location : Lodiakhali, Ichakhali  
**Coordinates: Lat- 22.78207 Long- 91.47032**



Bore hole No: BH-M40  
Location : Sony Mijertek, TekerhatBazar,Ichakhali  
**Coordinates: Lat- 22.81053 Long- 91.47058**









	
	<p>Bore hole No: BH-M49 Location : OraKaziMijibariJame Mosque, Mirshorai <b>Coordinates: Lat- 22.78863 Long- 91.55093</b></p>

	
	<p>Bore hole No: BH-M50 Location : Mirshorai Degree College, Mirsorai <b>Coordinates: Lat- 22.77792 Long- 91.57289</b></p>









Bore hole No: BH-M57  
Location : MayaniBogla Kumar Primary School,  
Mayani  
Coordinates: Lat- 22.73095 Long- 91.56573



Bore hole No: BH-M58  
Location : West KhoiachoraMunipara, Jame Mosque  
Coordinates: Lat- 22.758 Long- 91.57073

	
	<p>Bore hole No: BH-M59 Location : 3 Ghoriatola, Jame mosque, Maghadia <b>Coordinates: Lat- 22.76206 Long- 91.5293</b></p>

	
	<p>Bore hole No: BH-M60 Location: 90 no. Maghadia NC Govt. Primary School, Maghadia <b>Coordinates: Lat- 22.74951 Long- 91.53351</b></p>



	
	<p>Bore hole No: BH-M63 Location : Komorali Union High School, Komor Ali Union Bazar <b>Coordinates: Lat- 22.68562 Long- 91.58553</b></p>

	
	<p>Bore hole No: BH-M64 Location : KatakhaliBeribadh, Shekerkhali <b>Coordinates: Lat- 22.72091 Long- 91.51587</b></p>





Bore hole No: BH-M67  
Location : IchakhaliKhalpar, Ichakhali  
Coordinates: Lat- 22.78336 Long- 91.48410



Bore hole No: BH-M68  
Location : Shaherkhali High School, Shaherkhali  
Coordinates: Lat- 22.71369 Long- 91.56564










Bore hole No: BH-M75  
Location : MajedaHuq High School, Mayani  
Coordinates: Lat- 22.72981 Long- 91.57939




Bore hole No: BH-M76  
Location : Shah Abdul Majid Govt. Primary School,  
West Mayani  
Coordinates: Lat- 22.7176 Long- 91.54582

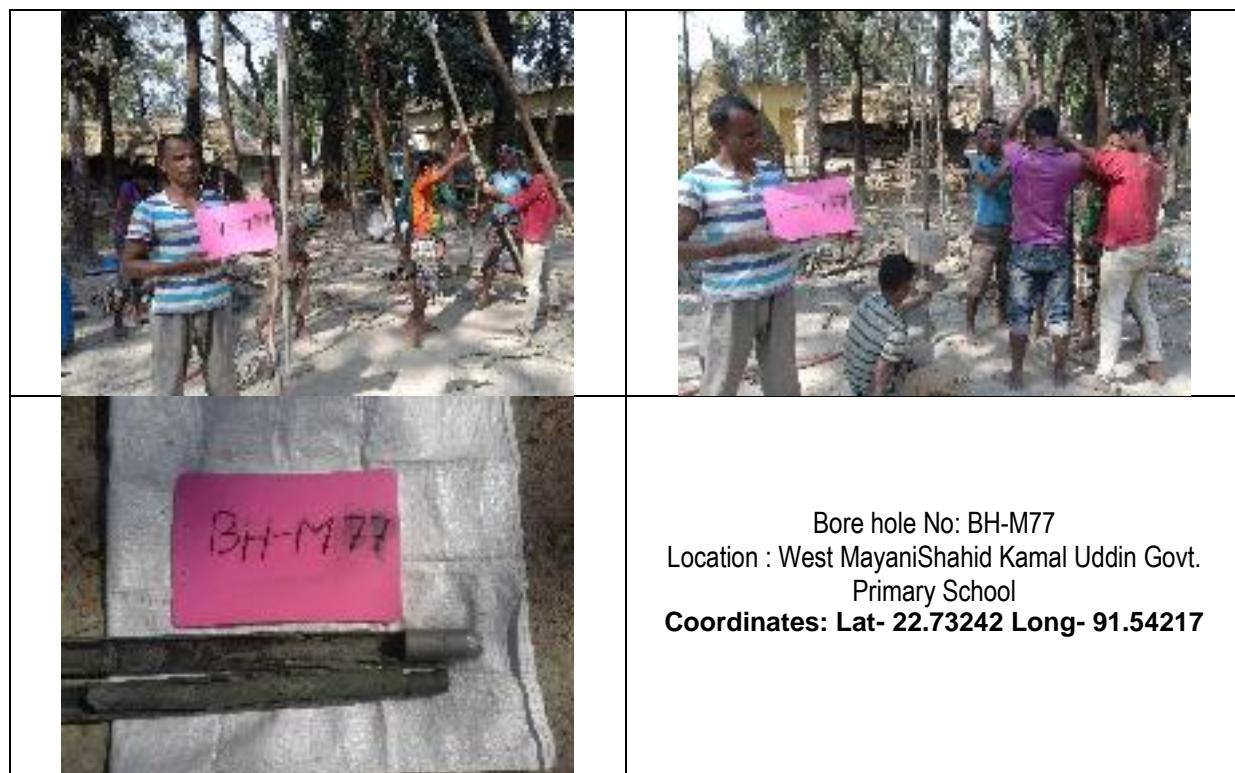

Bore hole No: BH-M77  
Location : West MayaniShahid Kamal Uddin Govt.  
Primary School  
Coordinates: Lat- 22.73242 Long- 91.54217



Bore hole No: BH-M78  
Location: 13 no. Mayani Union Complex Building  
Coordinates: Lat- 22.7457 Long- 91.55657

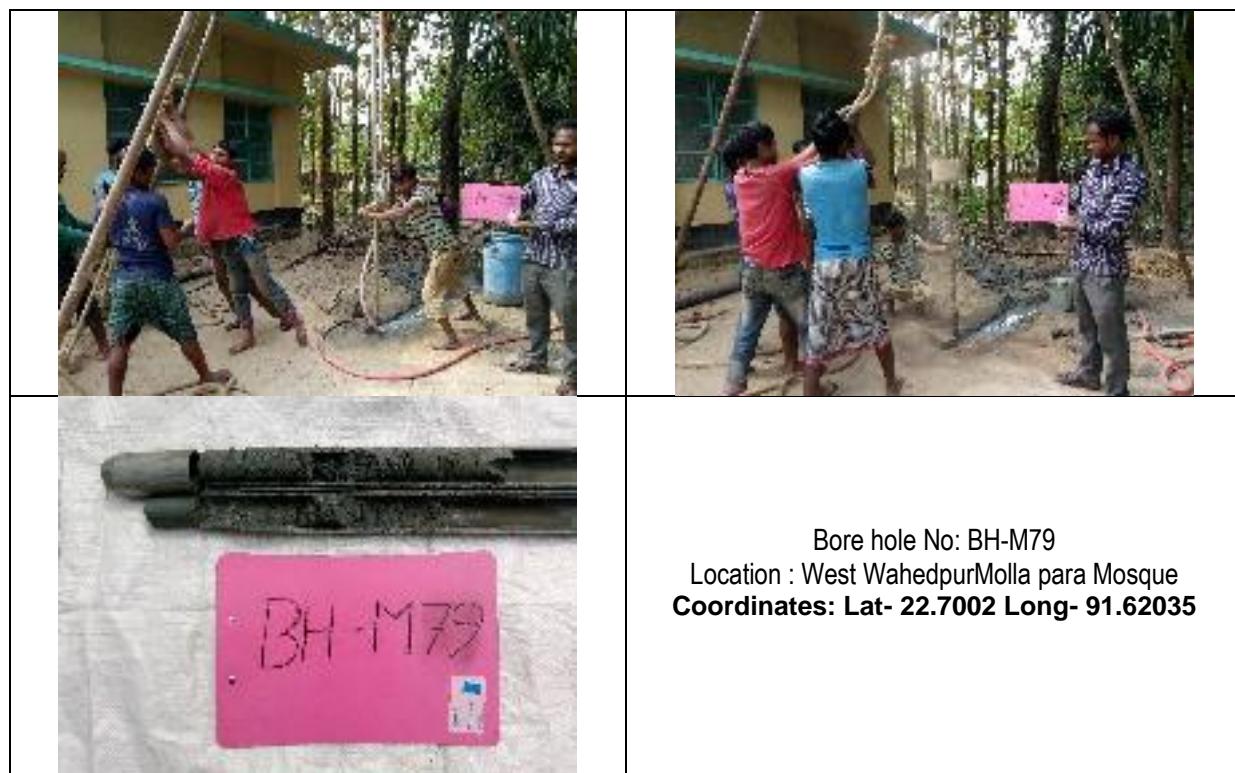







## APPENDIX H: GEOTECHNICAL LOGS/ BOREHOLE LOGGING TEST RESULTS AND GRAPHS

---



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M01

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 25.01.2018

Completed on: 25.01.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : West Joar Rashidia Govt. Primary School

## Legend:



Clay

Silt

Sand

Coordinates: Lat-22.94282 Long-91.54206

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration											
						Blows on Spoon				N-Values								0 10 20 30 40 50 60 70 80 90 100 110 120			
						15cm	15cm	15cm	30cm												
1.5					2	2	2	2	4												
3.0					3	4	4	4	8												
4.5					2	2	3	3	5												
6.0	Gray to Brown Soft to Medium Stiff Clayey SILT with very Fine Sand		1	12.5	1	1	2	2	4												
7.5					1	1	2	2	4												
9.0					1	1	2	2	4												
10.5					1	1	2	2	3												
12.0					1	1	1	1	2												
13.5					4	5	8	8	13												
15.0					16	18	24	24	42												
16.5	Light Gray Medium Dense to Dense Medium to Fine SAND		3	9	2	4	8	8	12												
18.0					13	13	26	26	39												
19.5					12	16	20	20	36												
21.0					19	28	34	34	62												
22.5					4	6	7	7	13												
24.0	Light Brown Stiff to Very Stiff Clayey SILT with Very Fine Sand		4	4.5	6	7	17	17	24												
25.5					6	8	16	16	24												
27.0					10	20	24	24	44												
28.5	Light Gray Dense to Very Dense Medium to Fine SAND		5	4	16	50	53	53	103												
30.0	End of Boring				18	50	57	57	107												

■ Disturbed Sample(Split Spoon)

■ Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M02 Method of Boring: Percussion Boring Dia.:100(mm) Boring Depth: 30.0m							Exixting ground level: Ground water level: 4.00m below EGL Started on: 26.01.2018 Completed on: 26.01.2018			
Client :Urban Development Directorate (UDD) Project : Mirsharai Upazilla Development Plan							Legend: Clay     Silt     Sand			
Location : Choturua, Ward-1, Korerhat							Coordinates: Lat- 22.93579 Long- 91.55832			
Depth (m)	Visual Description		Symbol	Sample	Layer Number	Thickness(m)	Standard Penetration Test			
							Blows on Spoon	N-Values		
							15cm	15cm	15cm	
									30cm	
1.5							3	6	7	13
3.0	Redish Brown to Brown Stiff Clayey SILT				1.0	8.0	4	5	7	12
4.5							4	5	6	11
6.0							4	5	7	12
7.5							3	4	6	10
9.0							4	6	8	14
10.5							5	6	10	16
12.0	Brown to Gray Medium Dense to Very Dense medium to fine SAND				3.0	9.0	18	22	28	50
13.5							20	23	32	55
15.0							18	23	30	53
16.5							16	20	27	47
18.0							9	14	18	32
19.5							10	14	19	33
21.0	Gray Very Stiff to Hard Clayey SILT with organic matters				4.0	10.0	6	12	14	26
22.5							3	9	12	21
24.0							4	8	12	20
25.5							3	4	5	9
27.0							4	6	8	14
28.5	Gray Very Dense Fine to Medium SAND				5.0	3.0	8	22	32	54
30.0	End of Boring						18	23	30	53

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1	Layer5
Layer2	Layer6
Layer3	Layer7
Layer4	Layer8

The graph shows the relationship between SPT blow counts and depth. The x-axis represents SPT blow counts from 0 to 60, and the y-axis represents depth from 0 to 30m. The curve starts at approximately (0, 13), dips to a minimum of about 10 at 10m depth, rises to a peak of about 55 at 16m, dips again to about 32 at 18m, rises to another peak of about 54 at 28m, and finally drops sharply to about 53 at 30m.



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M03

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Giamara gram, Bagan road, Korerhat

Exixting ground level:

Ground water level: 4.00m below EGL

Started on: 26.01.2018

Completed on: 26.01.2018

## Legend:



Coordinates: Lat- 22.92456 Long- 91.57372

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon		N-Values			
						15cm	15cm	15cm	30cm		
1.5					5	5	7	8	15		
3.0					4	4	6	8	14		
4.5	Redish Brown stiff to very stiff clayey SILT with very fine sand			6	9.5	4	5	6	11		
6.0					4	4	5	7	12		
7.5					5	5	6	8	14		
9.0					7	7	8	12	20		
10.5					14	14	18	20	38		
12.0					11	11	16	19	35		
13.5					13	13	18	21	39		
15.0					15	15	21	23	44		
16.5					16	16	23	27	50		
18.0					14	14	22	30	52		
19.5	Redish Brown Dense to Very Dense Fine to Medium SAND with little Silt			7	20.5	16	24	31	55		
21.0					17	17	24	30	54		
22.5					19	19	26	33	59		
24.0					17	17	24	30	54		
25.5					19	19	26	33	59		
27.0					16	16	23	40	63		
28.5					17	17	26	39	65		
30.0	End of Boring				16	16	25	38	63		

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M04 Method of Boring: Percussion Boring Dia.:100(mm) Boring Depth: 30.0m						Existing ground level: Ground water level: 4.00m below EGL Started on: 25.01.2018 Completed on: 25.01.2018			
Client :Urban Development Directorate (UDD) Project : Mirsharai Upazilla Development Plan						Legend:  Clay Silt Sand			
Location : Bisshowtila Jame mosque, Olinogor, Korerhat									
Coordinates: Lat- 22.9626 Long- 91.58258									
Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test	SPT blows per 0.3 m penetration		
						Blows on Spoon N-Values			
						15cm 15cm 15cm 30cm			
1.5	Gray to Brown Soft to Medium Stiff Clayeye SILT with very Fine Sand			1	3.5	1 2 1 3			
3.0	Redish Brown Loose very fine to Medium SAND			2	1.5	2 4 6 10			
4.5				3		3 4 5 9			
6.0				8		8 12 16 28			
7.5	Redish Brown to Brown Medium Dense to Dense medium to coarse SAND			5	7.5	9 13 18 31			
9.0				10		10 15 20 35			
10.5				9		9 14 18 32			
12.0				6		6 10 13 23			
13.5				8		8 14 20 34			
15.0				9		9 15 21 36			
16.5				10		10 18 24 42			
18.0				6		6 10 25 35			
19.5				10		10 22 23 45			
21.0	Gray to Redish Brown Hard Clayey SILT with Sand			6	17.5	12 20 30 50			
22.5				8		8 14 22 36			
24.0				10		10 17 25 42			
25.5				11		11 18 26 44			
27.0				10		10 19 28 47			
28.5				10		10 20 28 48			
30.0	End of Boring					12 22 29 51			
Disturbed Sample(Split Spoon) Undisturbed Sample(Shelby Tube)									
Layer1       Layer5 Layer2       Layer6 Layer3       Layer7 Layer4       Layer8									



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M05 Method of Boring: Percussion Boring Dia.:100(mm) Boring Depth: 30.0m							Existing ground level: Ground water level: 4.00m below EGL Started on: 25.01.2018 Completed on: 25.01.2018													
Client :Urban Development Directorate (UDD) Project : Mirsharai Upazilla Development Plan Location : Poshchim olinogor, Korerhat							Legend:  Clay Silt Sand Coordinates: Lat- 22.94435 Long- 91.5759													
Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test			SPT blows per 0.3 m penetration											
						Blows on Spoon	N-Values		0	10	20	30	40	50	60	70	80			
1.5	Redish Brown Stiff to Very Stiff Clayey SILT			4	5.0	3	5	7	12											
3.0						5	7	10	17											
4.5						4	6	9	15											
6.0						6	8	10	18											
7.5						5	8	9	17											
9.0	Brown Medium Dense Fine SAND with Silt			5	9.0	7	10	12	22											
10.5						8	10	13	23											
12.0						7	13	16	29											
13.5						4	5	10	15											
15.0						11	15	21	36											
16.5						17	27	33	60											
18.0						17	29	36	65											
19.5						19	31	36	67											
21.0	Light gray Dense to Very Dense Medium to Fine Sand			7	16.0	16	19	30	49											
22.5						18	22	35	57											
24.0						21	25	33	58											
25.5						20	26	35	61											
27.0						18	22	32	54											
28.5						21	25	30	55											
30.0	End of Boring					22	28	30	58											
Disturbed Sample(Split Spoon) Undisturbed Sample(Shelby Tube) Layer1       Layer5 Layer2       Layer6 Layer3       Layer7 Layer4       Layer8																				



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M06 Method of Boring: Percussion Boring Dia.:100(mm) Boring Depth: 30.0m						Existing ground level: Ground water level: 4.00m below EGL Started on: 27.01.2018 Completed on: 27.01.2018				
Client :Urban Development Directorate (UDD) Project : Mirsharai Upazilla Development Plan						Legend: Clay    Silt    Sand				
Location : Ajomnogor Community Clinic, Hinguli						Coordinates: Lat- 22.91506 Long- 91.54119				
Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				
						Blows on Spoon		N-Values		
	15cm	15cm	15cm	30cm		SPT blows per 0.3 m penetration				
1.5				1	5.0	1	2	2	4	
3.0	Reddish Brown to Gray medium stiff to Soft Clayey SILT			2		2	3	3	6	
4.5				2		2	3	3	6	
6.0				3		3	5	7	12	
7.5				3		3	5	8	13	
9.0	Reddish Brown to Gray medium stiff to Very stiff Clayey SILT			4	9.0	6	8	12	20	
10.5				6		6	10	13	23	
12.0				7		7	10	12	22	
13.5				6		6	9	12	21	
15.0				10		10	14	17	31	
16.5				8		8	14	18	32	
18.0	Brownish Gray Hard Silty Clay			6	9.0	16	22	28	50	
19.5				8		8	16	22	38	
21.0				10		10	18	24	42	
22.5				11		11	22	28	50	
24.0				7		7	10	16	26	
25.5	Brownish Gray Dense fine to medium SAND			8	7.0	8	12	18	30	
27.0				8		8	12	16	28	
28.5				9		9	13	20	33	
30.0	End of Boring			10		10	14	22	36	
Disturbed Sample(Split Spoon) Undisturbed Sample(Shelby Tube)										
Layer1    Layer5 Layer2    Layer6 Layer3    Layer7 Layer4    Layer8										



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M07

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 1.50m below EGL

Started on: 27.01.2018

Completed on: 27.01.2018

Client :Urban Development Directorate (UDD)  
Project : Mirsharai Upazilla Development Plan

Location : Khil hinguli Govt. Primary School

## Legend:



Clay

Silt

Sand

Coordinates: Lat- 22.89774 Long- 91.5464

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon N-Values					
						15cm	15cm	15cm	30cm		
1.5					1	1	2	2	4		
3.0					2	2	4	5			
4.5					1	2	2	6			
6.0	Brown Medium stiff to stiff SILT with very Fine Sand			1	14.0	3	5	8	12		
7.5						3	6	9	13		
9.0						4	6	10	20		
10.5						5	7	10	23		
12.0						5	8	8	22		
13.5						4	8	9	21		
15.0	Gray Dense Medium to Fine SAND			3	3.0	15	18	27	31		
16.5						17	20	22	32		
18.0						5	8	12	50		
19.5	Brownish Gray Stiff to Very Stiff Clayey SILT			4	6.0	6	9	14	38		
21.0						4	6	7	42		
22.5						3	5	7	50		
24.0	Brown Medium Dense Fine to Medium SAND			5	3.0	15	16	18	26		
25.5						16	18	23	30		
27.0	Brownish Gray Very Stiff Clayey SILT			6	3.0	6	9	15	28		
28.5						7	11	14	33		
30.0	Gray Dense Fine SAND			7	1.0	12	20	22	36		
	End of Boring										

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M08

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Exixting ground level:

Ground water level: 4.00m below EGL

Started on: 28.01.2018

Completed on: 28.01.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Jamalpur, Baraiarhat Pourashava

## Legend:



Clay      Silt      Sand

Coordinates: Lat- 22.89317 Long- 91.5297

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration								
						Blows on Spoon		N-Values										
						15cm	15cm	15cm	30cm	0	10	20	30	40	50	60	70	80
1.5	Brownish Gray Medium Stiff Clayey SILT with little sand			1	5.0	1	2	3	5									
3.0						2	3	3	6									
4.5						2	2	3	5									
6.0						2	2	3	5									
7.5	Gray loose Very Fine SAND with Silt			2	7.5	1	2	2	4									
9.0						1	1	2	3									
10.5						1	1	2	3									
12.0						3	9	17	26									
13.5						5	8	12	20									
15.0						4	6	8	14									
16.5						5	6	9	15									
18.0						6	12	15	27									
19.5	Brownish Gray Stiff to very Stiff Clayey SILT with little sand			4	16.5	6	10	12	22									
21.0						5	8	12	20									
22.5						5	7	12	19									
24.0						4	6	7	13									
25.5						4	7	7	14									
27.0						3	5	7	12									
28.5	Brownish Gray Very Dense Fine SAND			5	1.0	4	6	8	14									
30.0	End of Boring					6	25	60	85									

■ Disturbed Sample(Split Spoon)

■ Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M09

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.50m below EGL

Started on: 28.01.2018

Completed on: 28.01.2018

Client :Urban Development Directorate (UDD)



Project : Mirsharai Upazilla Development Plan

Location : East Mehedi Nagar (Forrest Office)

**Legend:**

Clay      Silt      Sand

**Coordinates:** Lat- 22.88751 Long- 91.55489

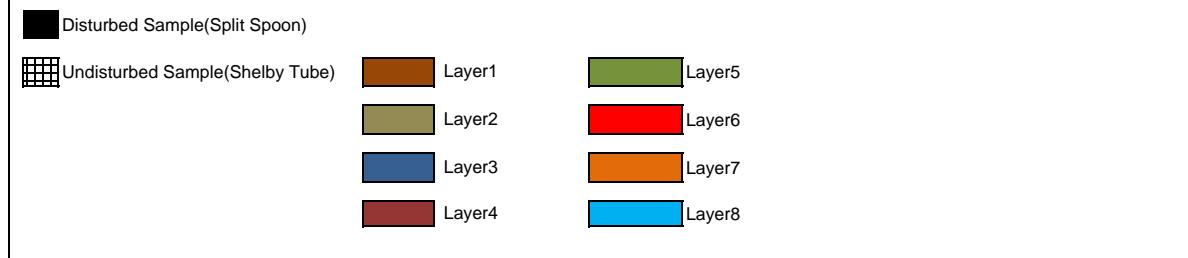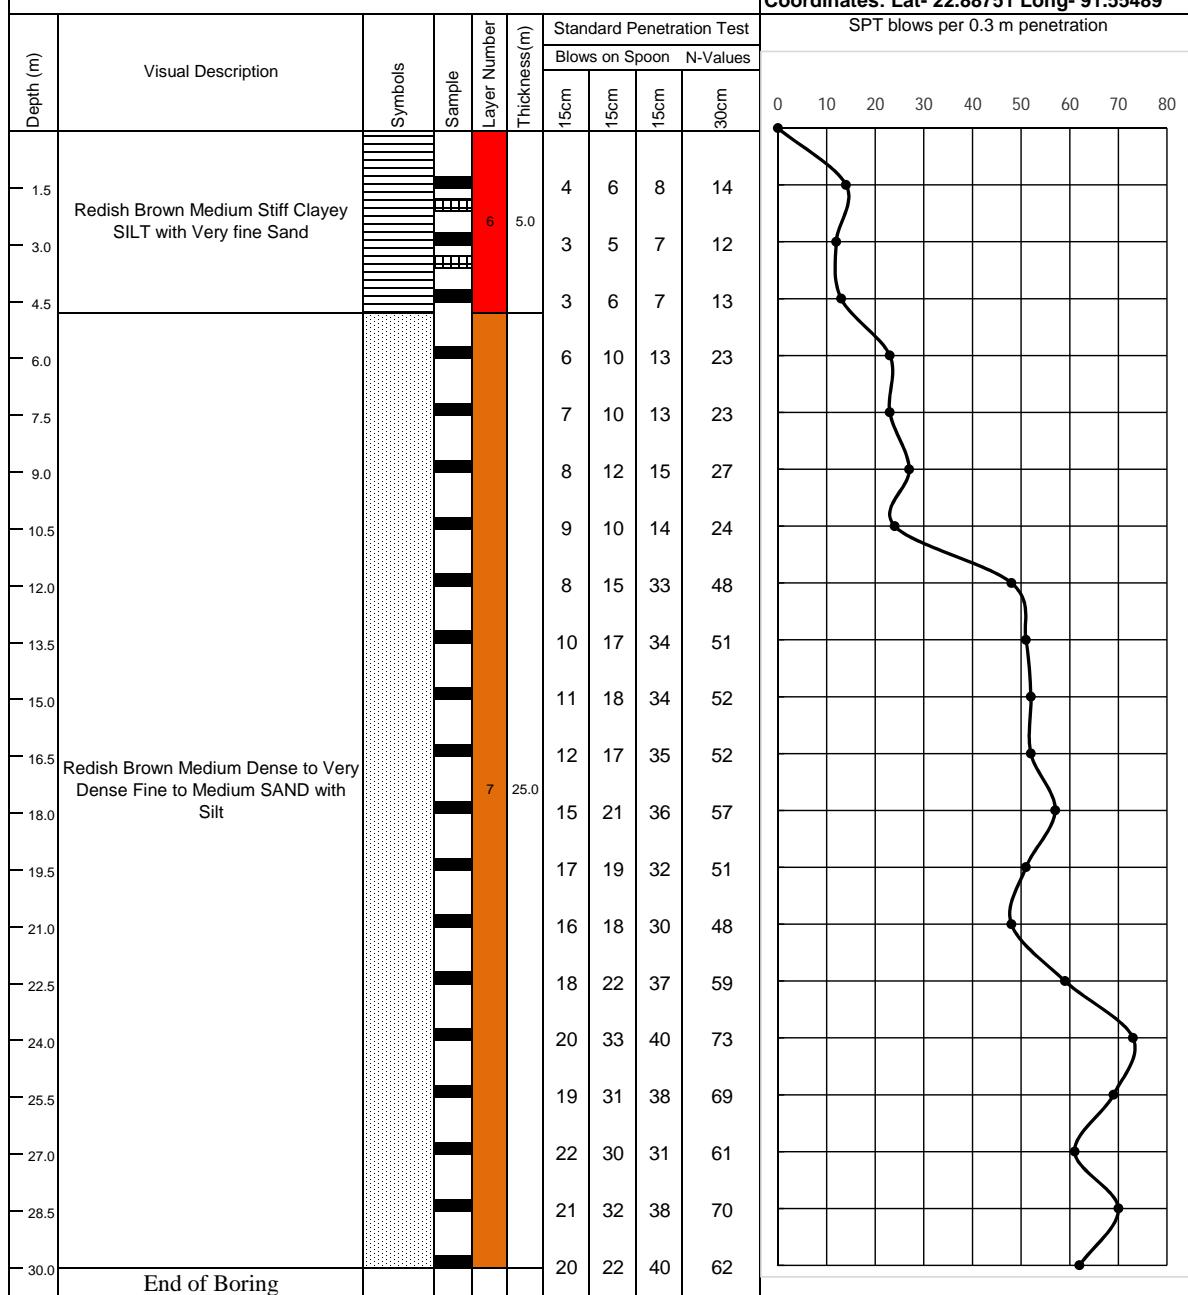



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M10

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 2.50m below EGL

Started on: 28.01.2018

Completed on: 28.01.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : West Hinguli, Gonokchora

## Legend:



Clay

Silt

Sand

Coordinates: Lat- 22.90032 Long- 91.52085

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon		N-Values			
						15cm	15cm	15cm	30cm		
1.5						2	3	4	7		
3.0						3	4	6	10		
4.5						3	4	7	11		
6.0	Brownish Gray to Gray Very Soft to Medium Stiff Clayey SILT with little Sand			1	14.0	1	1	2	3		
7.5						1	1	2	3		
9.0						1	1	1	2		
10.5						1	1	2	3		
12.0						1	1	1	2		
13.5						1	1	1	2		
15.0						4	7	10	17		
16.5						5	8	10	18		
18.0	Gray Stiff to Very Stiff Clayey SILT with Very Fine Sand			4	9.0	6	10	12	22		
19.5						6	10	13	23		
21.0						4	5	6	11		
22.5						4	6	8	14		
24.0						10	15	17	32		
25.5	Gray Very Stiff to Hard Clayey SILT with Very Fine Sand			6	7.0	8	10	14	24		
27.0						7	10	12	22		
28.5						8	14	18	32		
30.0	End of Boring					8	16	20	36		

█ Disturbed Sample(Split Spoon)

█ Undisturbed Sample(Shelby Tube)

█ Layer1

█ Layer5

█ Layer2

█ Layer6

█ Layer3

█ Layer7

█ Layer4

█ Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M11 Method of Boring: Percussion Boring Dia.:100(mm) Boring Depth: 30.0m						Existing ground level: Ground water level: 4.00m below EGL Started on: 30.01.2018 Completed on: 30.01.2018				
Client :Urban Development Directorate (UDD) Project : Mirsharai Upazilla Development Plan						Legend:  Clay Silt Sand				
Location : Imampur Titabot tola Furkania Madrasa						Coordinates: Lat- 22.87949 Long- 91.53175				
Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test		SPT blows per 0.3 m penetration		
						Blows on Spoon	N-Values			
						15cm	15cm	15cm	30cm	
1.5	Brown Soft to Medium Stiff SILT with fine Sand			1	5.0	1	1	2	3	
3.0						1	3	3	6	
4.5						2	3	4	7	
6.0						3	5	6	11	
7.5	Brown to Gray Medium Dense Medium to Fine SAND			3	6.0	4	7	8	15	
9.0						10	12	14	26	
10.5						5	8	10	18	
12.0						4	5	7	12	
13.5						4	5	8	13	
15.0						4	6	9	15	
16.5						5	6	10	16	
18.0						4	10	12	22	
19.5	Brownish Gray to Gray Stiff to Very Stiff SILT with very fine sand			4	19.0	7	10	11	21	
21.0						3	4	6	10	
22.5						3	3	6	9	
24.0						3	4	4	8	
25.5						4	5	6	11	
27.0						8	12	16	28	
28.5						7	10	14	24	
30.0	End of Boring					5	8	13	21	

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1	Layer5
Layer2	Layer6
Layer3	Layer7
Layer4	Layer8

The graph plots SPT blow counts against depth. The x-axis represents depth in meters from 0 to 30, and the y-axis represents SPT blow counts from 0 to 30. The curve shows initial high blow counts (around 25-30) at shallow depths, followed by a sharp drop-off between 10m and 15m, and then a gradual increase towards the end of the borehole.



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M12 Method of Boring: Percussion Boring Dia.:100(mm) Boring Depth: 30.0m							Existing ground level: Ground water level: 2.00m below EGL Started on: 29.01.2018 Completed on: 29.01.2018		
Client :Urban Development Directorate (UDD) Project : Mirsharai Upazilla Development Plan Location : Bono Chowdhury Jame Mosque, Mobarokgun, Dhom							Legend:  Clay Silt Sand Coordinates: Lat- 22.89871 Long- 91.49581		
Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test			
						Blows on Spoon	N-Values	Blows on Spoon	N-Values
					15cm	15cm	15cm	30cm	
1.5					2	2	3		5
3.0	Brownish Gray Very Soft to medium Stiff SILT with Very Fine Sand		1	6.5	2	3	3		6
4.5					1	1	1		2
6.0					1	1	2		3
7.5					2	2	3		5
9.0	Gray Loose Fine to Very Fine SAND		2	6.0	3	4	5		9
10.5					3	4	4		8
12.0					4	4	6		10
13.5					4	6	8		14
15.0					5	7	10		17
16.5					6	8	10		18
18.0					6	9	12		21
19.5	Gray Medium Dense to Dense Medium to Fine SAND		3	15.0	7	10	14		24
21.0					8	12	16		28
22.5					8	13	18		31
24.0					7	10	12		22
25.5					8	12	16		28
27.0					10	16	22		38
28.5	Gray Medium Dense to Very Dense Medium to Fine SAND		5	2.5	12	22	28		50
30.0	End of Boring				14	24	30		54

SPT blows per 0.3 m penetration

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M13

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Exixting ground level:

Ground water level: 2.1m below EGL

Started on: 30.01.2018

Completed on: 30.01.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Banglabazar, Shantor road, Dhoom

## Legend:



Clay      Silt      Sand

Coordinates: Lat- 22.88204 Long- 91.51064

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon N-Values					
						15cm	15cm	15cm	30cm		
1.5	Gray Very Soft to Stiff Clayey SILT			1	3.5	1	2	3	5		
3.0						1	1	1	2		
4.5	Gray Very Loose Fine To very Fine SAND			2	4.5	1	1	1	2		
6.0						1	0	1	1		
7.5						1	1	1	2		
9.0	Light Gray Medium Dense Medium to Fine SAND with silt			3	3.0	3	4	6	10		
10.5						4	6	8	14		
12.0						3	5	7	12		
13.5						4	6	8	14		
15.0	Brownish Gary Medium stiff to very Stiff Clayey SILT			4	9.0	4	6	10	16		
16.5						5	6	12	18		
18.0						6	8	13	21		
19.5						6	8	12	20		
21.0						10	18	22	40		
22.5						11	19	24	43		
24.0	Gray Very Stiff to Hard Silty CLAY			6	10.0	8	8	12	20		
25.5						6	8	10	18		
27.0						5	6	7	13		
28.5						6	7	8	15		
30.0	End of Boring					7	10	14	24		

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2


Layer6

Layer3

Layer7

Layer4

Layer8

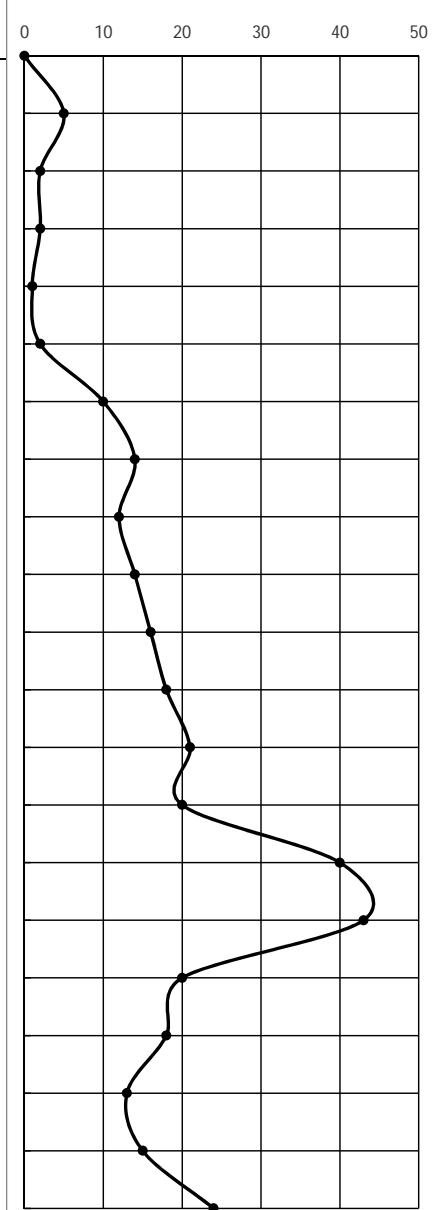



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M14 Method of Boring: Percussion Boring Dia.:100(mm) Boring Depth: 30.0m							Exixting ground level: Ground water level: 4.00m below EGL Started on: 30.01.2018 Completed on: 30.01.2018		
Client :Urban Development Directorate (UDD) Project : Mirsharai Upazilla Development Plan Location : 163 no. Fayezullah master Govt. Primary School							Legend: Clay     Silt     Sand Coordinates: Lat- 22.86107 Long- 91.54115		
Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test			
						Blows on 15cm Spoon	Blows on 15cm N-Values	Blows on 30cm Spoon	Blows on 30cm N-Values
1.5					6.5	3	6	9	15
3.0	Redish Brown Medium To Stiff Clayey SILT with Very Fine Sand			4	4	4	7	9	16
4.5					4	6	7	13	
6.0					3	7	11	18	
7.5	Gray Dense Medium to Fine SAND			5	1.5	14	18	20	38
9.0					6	8	11	19	
10.5					5	6	9	15	
12.0					7	8	10	18	
13.5					7	10	10	20	
15.0					7	12	14	26	
16.5					6	12	13	25	
18.0	Brown to light Gray stiff to Hard Clayey Silt with very fine sand			6	22.0	5	6	8	14
19.5					6	7	8	15	
21.0					6	8	10	18	
22.5					7	10	12	22	
24.0					9	13	18	31	
25.5					8	12	18	30	
27.0					9	13	18	31	
28.5					10	14	19	33	
30.0	End of Boring				11	18	19	37	
Disturbed Sample(Split Spoon) Undisturbed Sample(Shelby Tube)									
Layer1     Layer5 Layer2     Layer6 Layer3     Layer7 Layer4     Layer8									
SPT blows per 0.3 m penetration									



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M15 Method of Boring: Percussion Boring Dia.:100(mm) Boring Depth: 30.0m						Existing ground level: Ground water level: 4.00m below EGL Started on: 31.01.2018 Completed on: 31.01.2018								
Client :Urban Development Directorate (UDD) Project : Mirsharai Upazilla Development Plan Location : Alhaz Bodiu alam Chowdhury Govt. Primary School						Legend:  Clay Silt Sand								
Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test			SPT blows per 0.3 m penetration					
						Blows on Spoon	N-Values							
1.5	Brownish Gray Soft to Medium Stiff Clayey SILT			1	5.0	15cm	15cm	15cm	30cm	0	10	20	30	40
3.0						1	2	2	4					
4.5						1	1	2	3					
6.0	Light Gray Medium Dense Fine to very fine SAND with Silt			2	3.0	2	3	7	10					
7.5						4	6	8	14					
9.0	Light Gray Medium Dense Fine to Medium SAND			3	3.0	5	5	7	12					
10.5	Gray Medium Stiff Clayey SILT			4	1.5	5	6	8	14					
12.0						2	3	3	6					
13.5	Gray Medium Dense Fine to Medium SAND			5	4.5	6	8	10	18					
15.0						6	8	12	20					
16.5						7	10	12	22					
18.0						6	8	12	20					
19.5						6	8	13	21					
21.0						8	12	18	30					
22.5	Brownish Gray Stiff to Very Stiff Clayey SILT			6	13.0	8	12	20	32					
24.0						4	5	6	11					
25.5						4	5	7	12					
27.0						6	8	10	18					
28.5						7	10	12	22					
30.0	End of Boring					7	10	14	24					
Disturbed Sample(Split Spoon) Undisturbed Sample(Shelby Tube)						Layer1	Layer5							
Layer2       Layer6						Layer3	Layer7							
Layer4       Layer8														



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M16

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 29.01.2018


Completed on: 29.01.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Khil murari, ward no. 5, Zorargonj

## Legend:




Clay

Silt

Sand

Coordinates: Lat- 22.8783 Long- 91.55009

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon N-Values					
						15cm	15cm	15cm	30cm		
1.5	Brownish Gray Stiff SILT with Very fine Sand			4	5.0	2	5	6	11		
3.0						4	5	7	12		
4.5						4	6	7	13		
6.0	Brown Medium Dense Fine SAND			5	4.5	4	7	12	19		
7.5						5	8	14	22		
9.0						4	6	9	15		
10.5						4	7	8	15		
12.0	Brown to Gray Stiff to Very Stiff Clayey SILT			6	7.5	4	5	6	11		
13.5						5	6	7	13		
15.0						6	7	10	17		
16.5						6	8	11	19		
18.0						11	16	22	38		
19.5						10	15	21	36		
21.0						9	14	22	36		
22.5	Gray Dense to Very Dense Fine to medium SAND			7	13.0	10	16	23	39		
24.0						24	20	29	49		
25.5						16	21	31	52		
27.0						18	23	34	57		
28.5						19	25	36	61		
30.0	End of Boring					8	23	35	58		

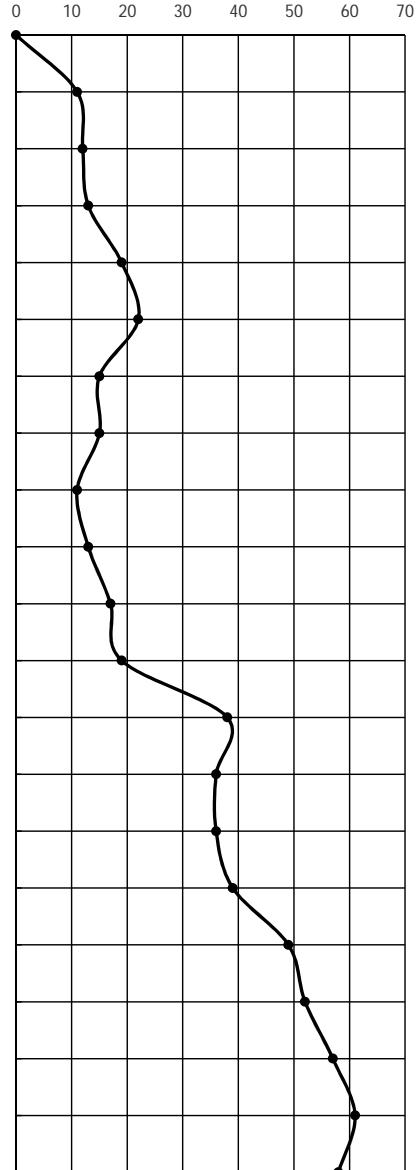

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M17 Method of Boring: Percussion Boring Dia.:100(mm) Boring Depth: 30.0m						Existing ground level: Ground water level: 4.00m below EGL Started on: 31.01.2018 Completed on: 31.01.2018												
Client :Urban Development Directorate (UDD) Project : Mirsharai Upazilla Development Plan Location : Shonapahar, murari, Zorargonj						Legend:  Clay Silt Sand												
Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration								
						Blows on Spoon	N-Values	15cm	15cm	15cm	30cm	0	10	20	30	40	50	60
1.5						1	1	1	1	1	2							
3.0	Brown to Gray Very Loose Fine to Very Fine SAND with Silt			2	8.0	1	0	1	1	1	1							
4.5						1	0	1	1	1	1							
6.0						2	3	4	4	7	7							
7.5						3	5	7	7	12	12							
9.0	Brown Very Stiff Clayey SILT			4	3.0	5	8	10	10	18	18							
10.5						5	11	12	12	23	23							
12.0	Gary Medium Dense Fine to Medium SAND			5	3.0	8	13	15	15	28	28							
13.5						8	14	17	17	31	31							
15.0						6	8	12	12	20	20							
16.5						7	9	12	12	21	21							
18.0						8	13	18	18	31	31							
19.5	Brownish Gary Very Stiff to Hard Clayey SILT			6	13.0	9	15	19	19	34	34							
21.0						10	17	22	22	39	39							
22.5						9	16	20	20	36	36							
24.0						10	16	25	25	41	41							
25.5						12	19	25	25	44	44							
27.0						11	18	25	25	43	43							
28.5	Gray Dense to Very Dense Medium to Fine SAND			7	3.0	15	19	27	27	46	46							
30.0	End of Boring					16	22	29	29	51	51							
Disturbed Sample(Split Spoon) Undisturbed Sample(Shelby Tube) Layer1       Layer5 Layer2       Layer6 Layer3       Layer7 Layer4       Layer8																		



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M18

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 21.02.2018


Completed on: 21.02.2018

Client :Urban Development Directorate (UDD)  
Project : Mirsharai Upazilla Development Plan

Location : Guccho gram M.A. Haider Primary School, Osmanpur

**Legend:**  
  
  
  
**Clay      Silt      Sand**

Coordinates: Lat- 22.88176 Long- 91.4809

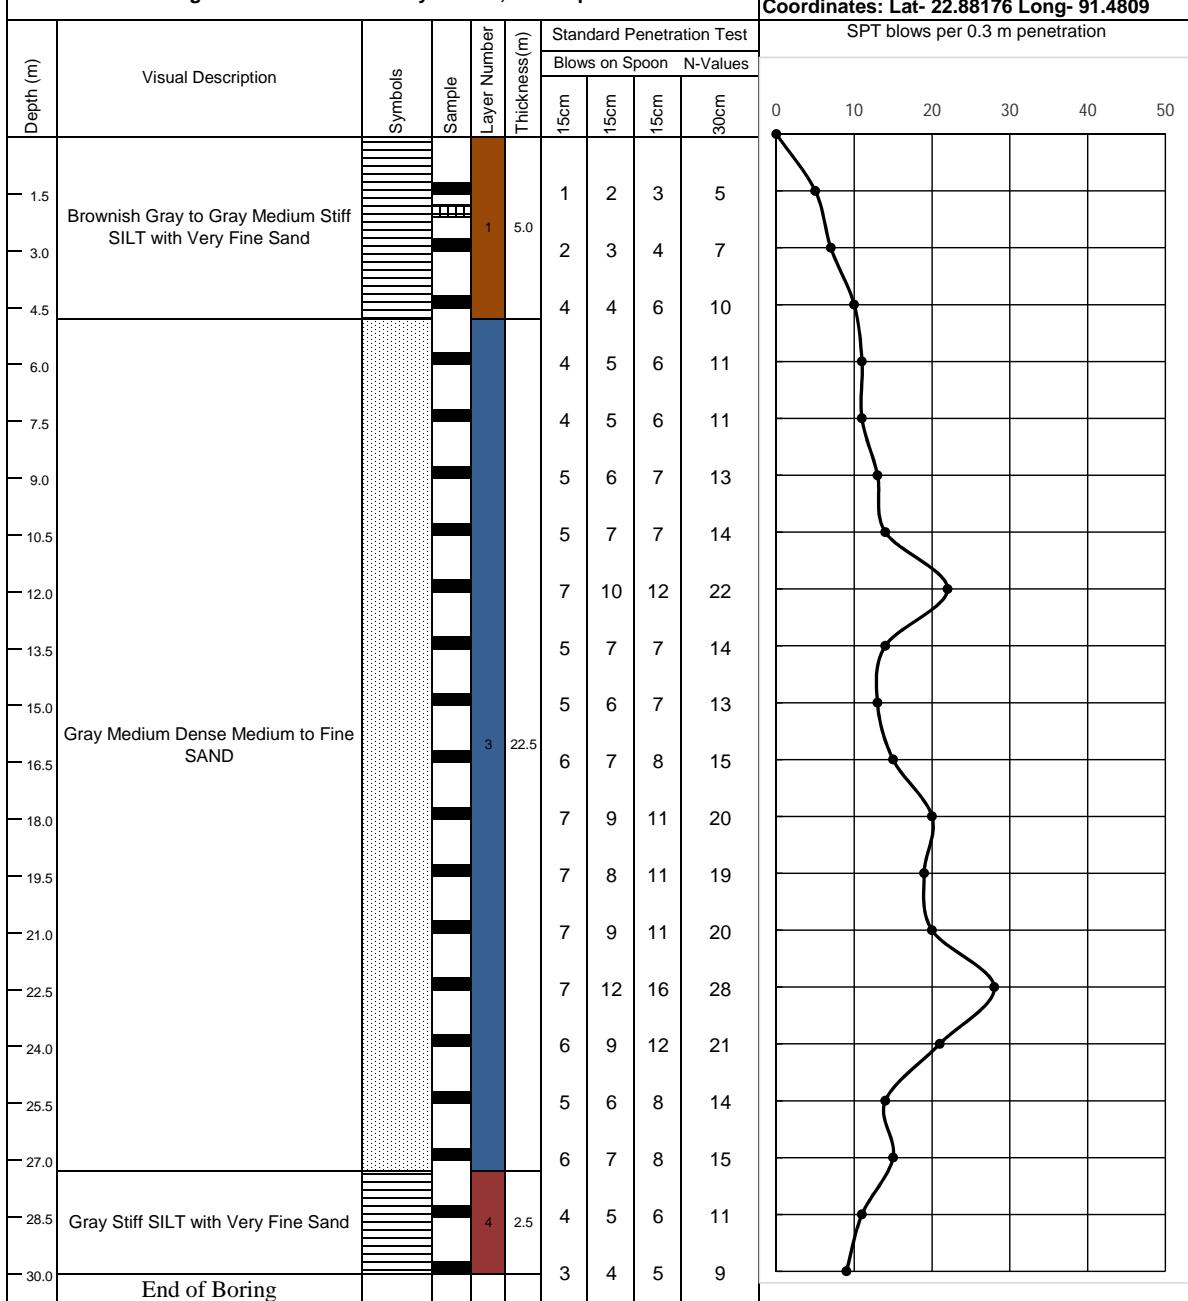

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M19

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 20.02.2018

Completed on: 20.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Bashkhali, Veribadh, Muhuri Project, Osmanpur

## Legend:




Clay

Silt

Sand

Coordinates: Lat- 22.84304 Long- 91.47659

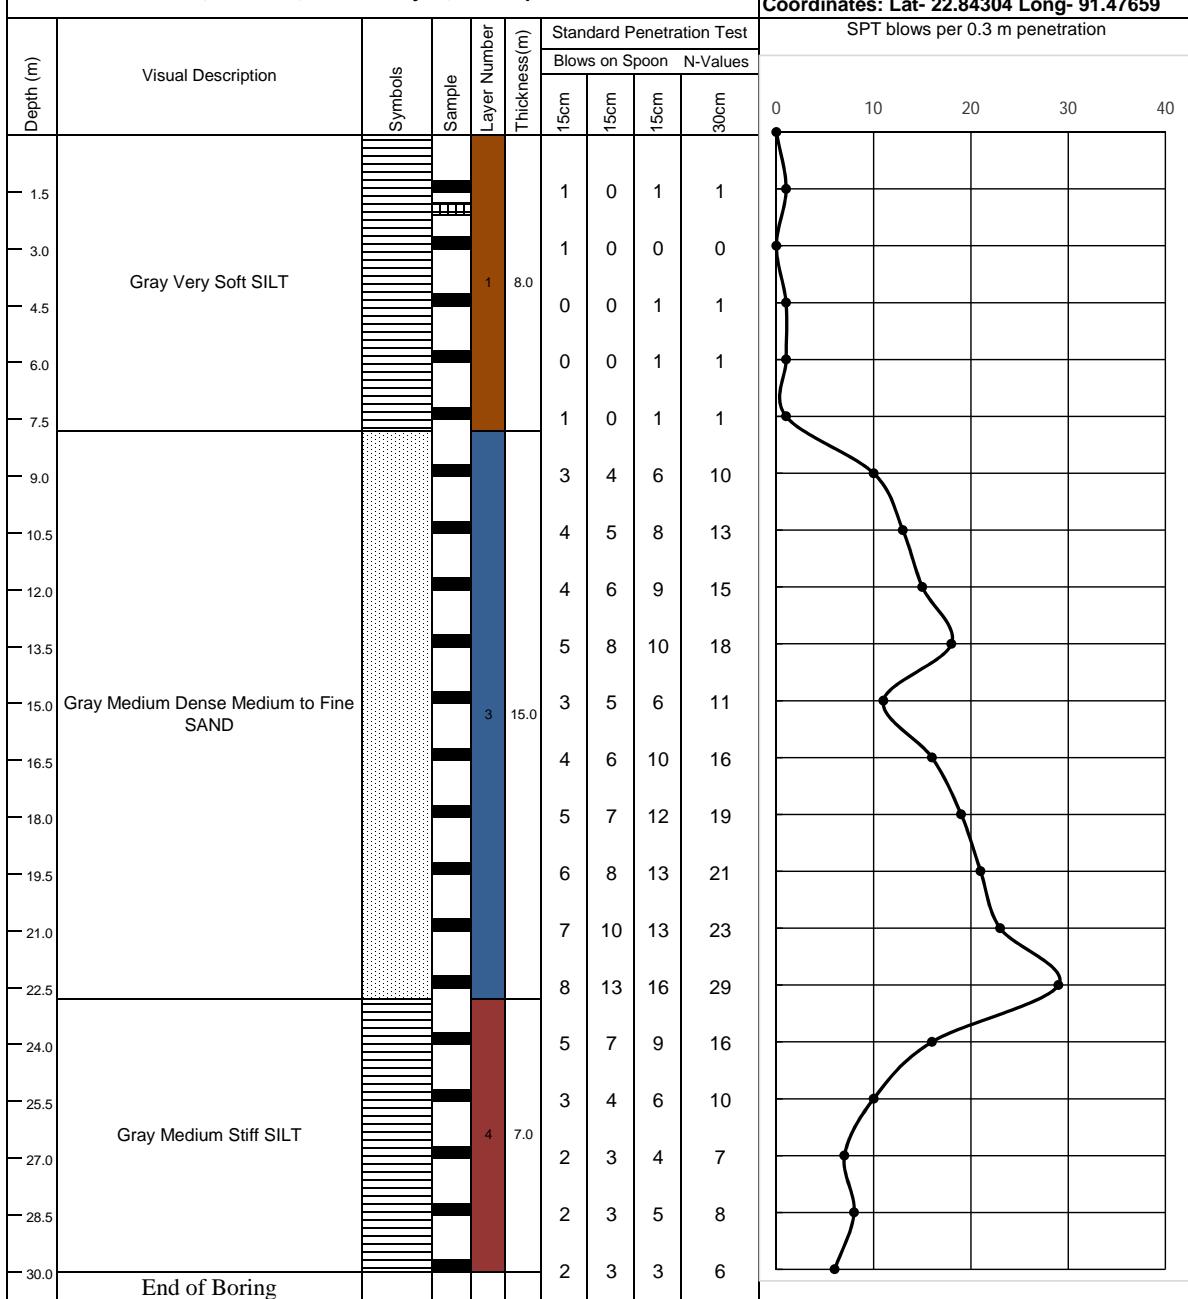

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M20

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 19.02.2018

Completed on: 19.02.2018

Client :Urban Development Directorate (UDD)  
Project : Mirsharai Upazilla Development Plan

Location : 39 no. East Shahedpur Govt. Primary School, Azampur

## Legend:



Clay

Silt

Sand

Coordinates: Lat- 22.85378 Long- 91.50001

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration								
						Blows on Spoon N-Values												
						15cm	15cm	15cm	30cm	0	10	20	30	40	50	60	70	80
1.5					1.5	1	1	1	2									
3.0					3.0	1	2	2	4									
4.5	Brownish Gray to Gray Very Soft to Medium Stiff SILT with very fine Sand			1	9.5	1	2	3	5									
6.0					6.0	2	3	5	8									
7.5					7.5	1	0	1	1									
9.0					9.0	1	1	2	3									
10.5					10.5	2	5	8	13									
12.0					12.0	3	6	9	15									
13.5	Gray Medium Dense Medium to Fine SAND			3	10.5	3	6	8	14									
15.0					15.0	5	8	12	20									
16.5					16.5	5	8	11	19									
18.0					18.0	6	10	11	21									
19.5					19.5	6	12	13	25									
21.0					21.0	14	20	30	50									
22.5					22.5	16	20	32	52									
24.0	Gray Dense to Very Dense Medium SAND			5	9.0	17	20	34	54									
25.5					25.5	15	23	28	51									
27.0					27.0	22	50	53	103									
28.5					28.5	22	48	55	103									
	Gray Very Stiff SILT			6	1.0	6	10	12	22									
	End of Boring																	

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M21

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 21.02.2018

Completed on: 21.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : East Moregang Jame Mosque, Osmanpur

## Legend:



Clay




Silt



Sand

Coordinates: Lat- 22.87252 Long- 91.49651

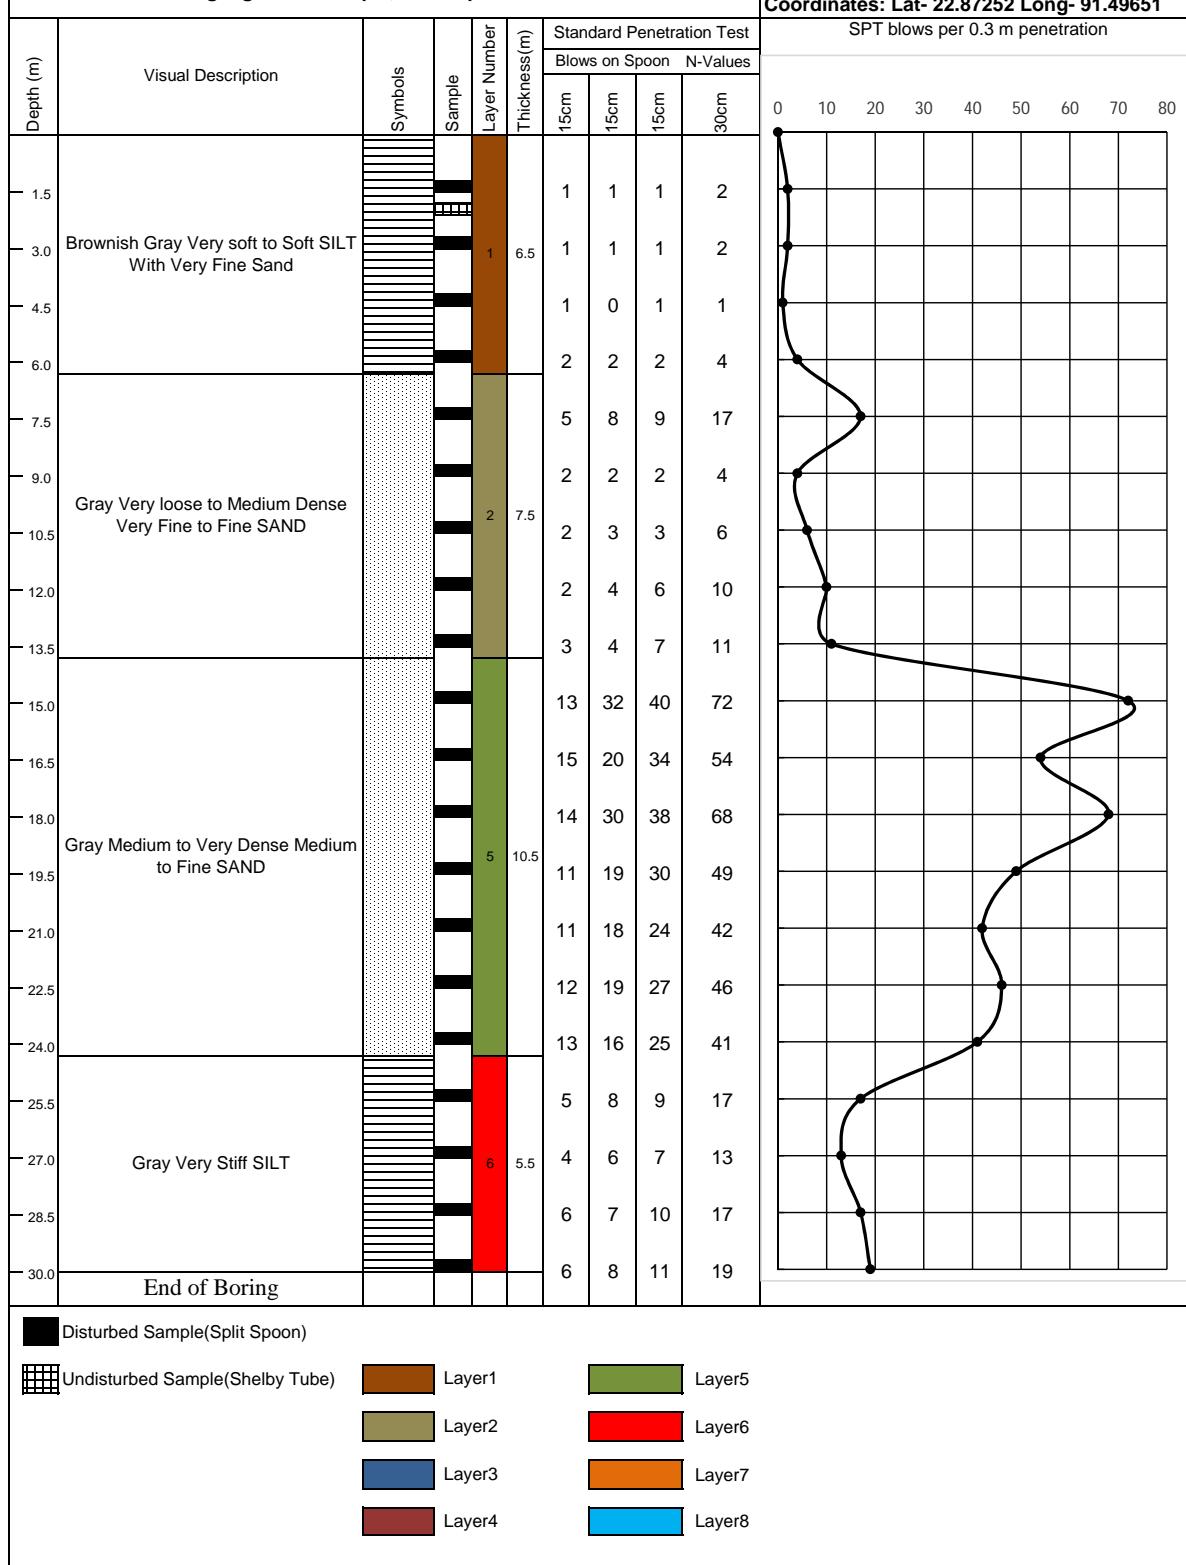



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M22

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 20.02.2018

Completed on: 20.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan


Location : Patacoat, Azampur, Osmanpur

## Legend:



Clay      Silt      Sand

Coordinates: Lat- 22.85292 Long- 91.48433

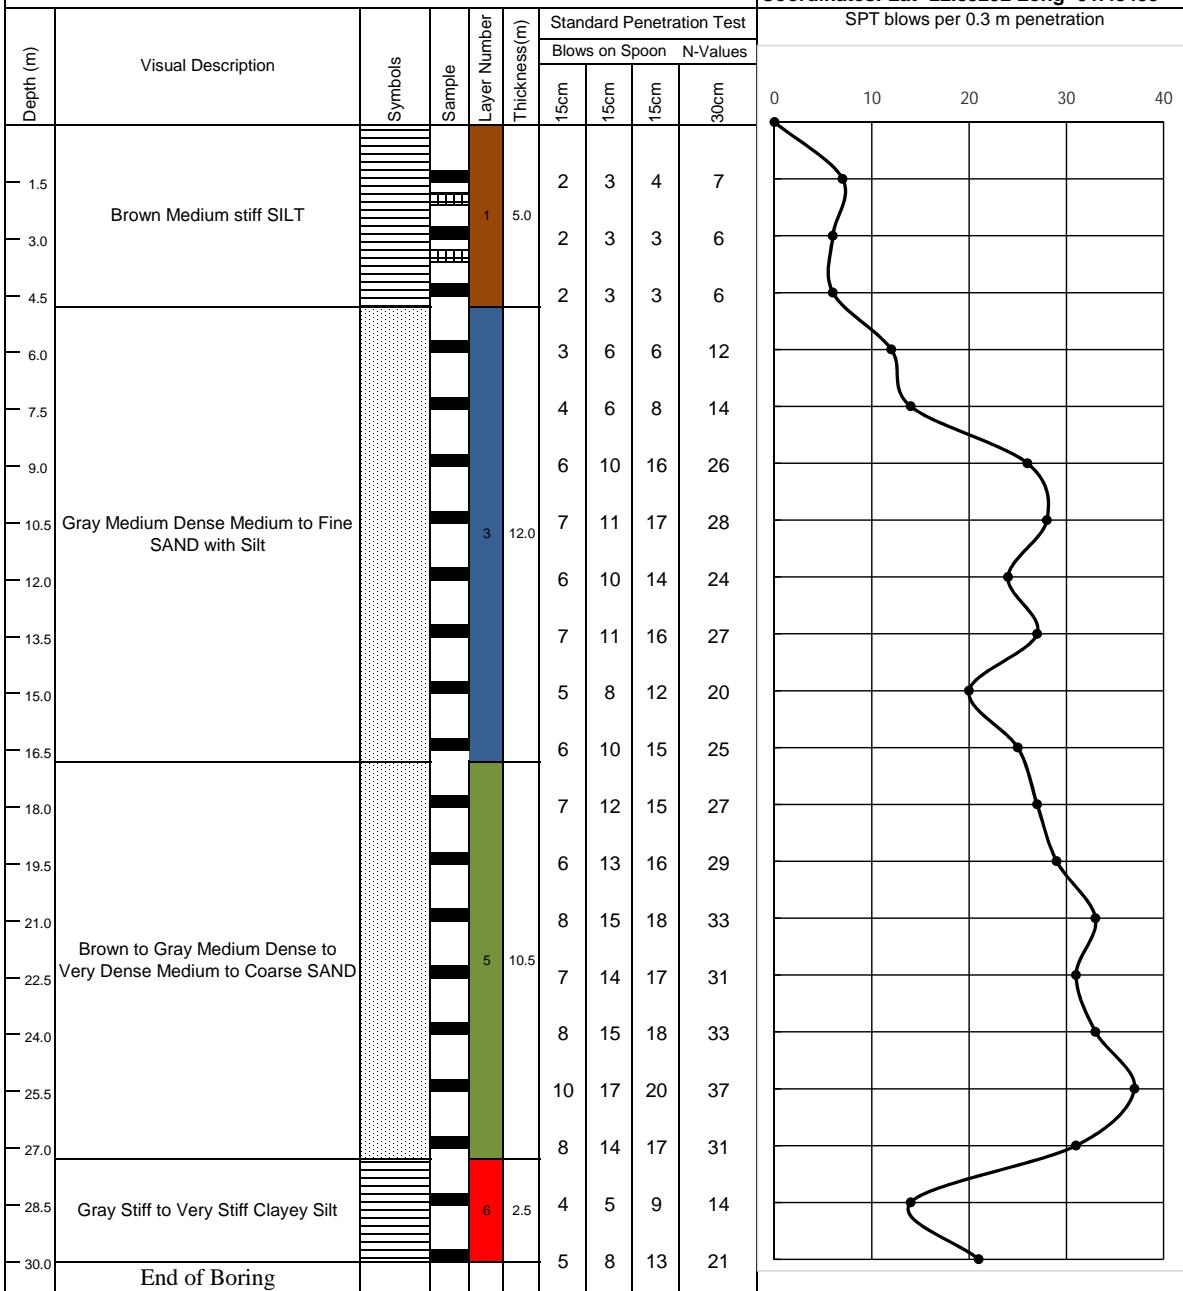

■ Disturbed Sample(Split Spoon)

■ Undisturbed Sample(Shelby Tube)

Layer1

Layers5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M23

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 02.02.2018

Completed on: 02.02.2018

Client :Urban Development Directorate (UDD)  
Project : Mirsharai Upazilla Development Plan

Location : 68 north durgapur Primary School, Varoddaj hat

## Legend:




Clay

Silt

Sand

Coordinates: Lat- 22.81511 Long- 91.54094

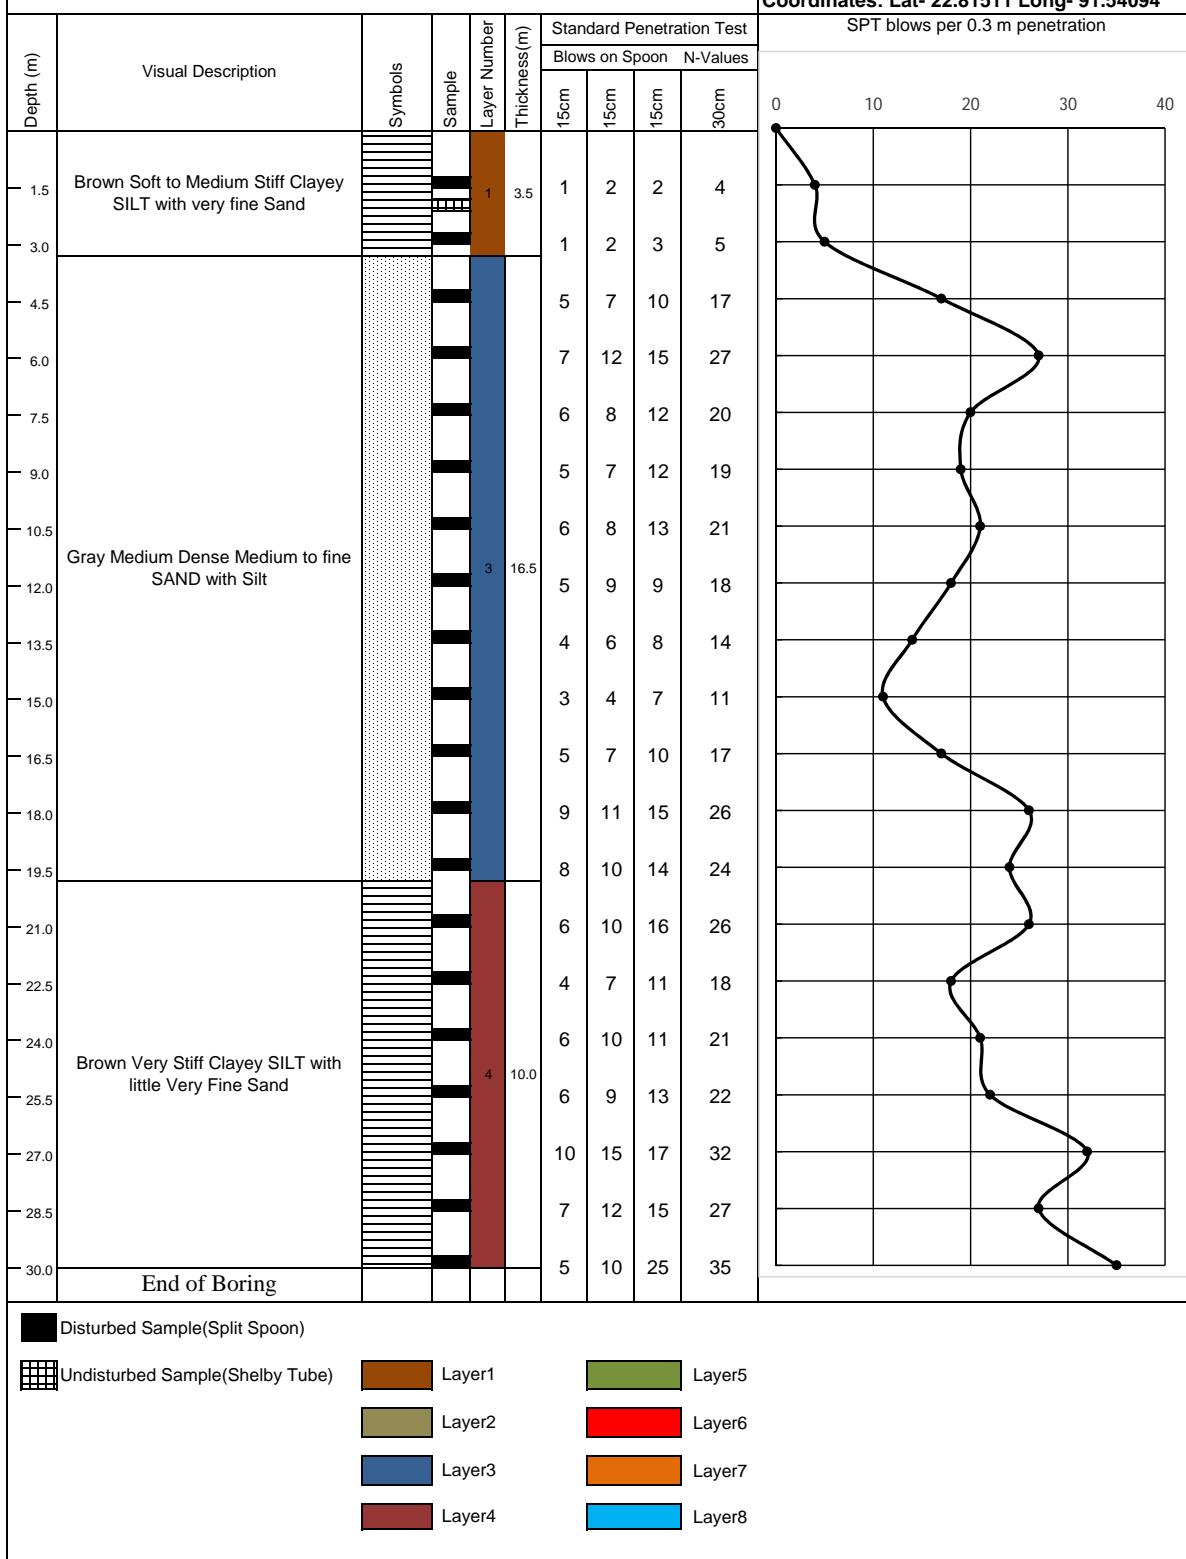



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M24

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 01.02.2018

Completed on: 01.02.2018

**Client :**Urban Development Directorate (UDD)  
**Project :**Mirsharai Upazilla Development Plan

Location : East Raypur Baitul Aman Jame Mosque, Durgapur

**Legend:**  
  
  
  
**Coordinates:** Lat- 22.83193 Long- 91.55396

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration					
						Blows on Spoon		N-Values							
						15cm	15cm	15cm	30cm	0	10	20	30	40	50
1.5	Brown Medium Stiff to Stiff Clayey SILT			1	5.0	2	3	4	7						
3.0						4	6	7	13						
4.5						5	7	7	14						
6.0	Brownish Gray Medium Dense Fine SAND with little silt			3	3.0	6	7	8	15						
7.5						5	7	7	14						
9.0						5	7	8	15						
10.5						5	8	9	17						
12.0						4	6	8	14						
13.5						5	7	9	16						
15.0						3	6	8	14						
16.5	Brown to Gray Medium to Very Stiff SILT with Little Sand			4	18.0	4	6	9	15						
18.0						5	7	9	16						
19.5						3	6	8	14						
21.0						4	6	9	15						
22.5						5	7	9	16						
24.0						6	8	9	17						
25.5						6	10	11	21						
27.0	Gray Dense Medium to Fine SAND			5	4.0	8	15	17	32						
28.5						10	17	19	36						
30.0	End of Boring					12	18	23	41						

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M25

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 01.02.2018


Completed on: 01.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Jafor Poultry Farm, Choitonner Hat, Durgapur

## Legend:



Clay

Silt

Sand

Coordinates: Lat- 22.83615 Long- 91.54239

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration							
						Blows on Spoon		N-Values									
						15cm	15cm	15cm	30cm	0	10	20	30	40	50	60	70
1.5						1	2	2	4								
3.0						1	2	3	5								
4.5	Brownish Gray Very Soft to Medium Stiff Clayey SILT with Very Fine Sand			1	11.0	1	1	1	2								
6.0						1	0	1	1								
7.5						1	1	1	2								
9.0						1	1	1	2								
10.5						1	1	2	3								
12.0						3	3	6	9								
13.5						3	5	7	12								
15.0						6	9	13	22								
16.5	Brownish Gray to Gray Medium to Very Stiff Clayey SILT with Very Fine Sand			4	12.0	6	10	14	24								
18.0						4	6	8	14								
19.5						5	7	8	15								
21.0						5	8	12	20								
22.5						6	10	12	22								
24.0	Gray Dense to Very Dense Fine SAND			5	3.0	7	17	42	59								
25.5						10	16	20	36								
27.0	Gray Very Stiff to Hard Clayey SILT			6	4.0	7	15	17	32								
28.5						7	14	15	29								
30.0	End of Boring					5	9	13	22								

■ Disturbed Sample(Split Spoon)

■ Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M26 Method of Boring: Percussion Boring Dia.:100(mm) Boring Depth: 30.0m						Existing ground level: Ground water level: 4.00m below EGL Started on: 01.02.2018 Completed on: 01.02.2018			
Client :Urban Development Directorate (UDD) Project : Mirsharai Upazilla Development Plan						Legend: Clay    Silt    Sand			
Location : Tetuiana Nath Para, Durgapur						Coordinates: Lat- 22.83779 Long- 91.51776			
						SPT blows per 0.3 m penetration			
Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness (m)	Standard Penetration Test			
						Blows on Spoon		N-Values	
	15cm	15cm	15cm	30cm					
1.5	Brownish Gray Very Soft to Medium Stiff Clayey SILT			1	5.0	2	2	3	5
3.0						1	1	1	2
4.5						1	1	1	2
6.0	Gray Medium dense Very fine to Fine SAND with silt			2	3.0	3	4	5	9
7.5						3	4	6	10
9.0						7	12	16	28
10.5						8	13	17	30
12.0	Gray Medium Dense to Dense Fine to Medium SAND			3	9.0	10	14	19	33
13.5						10	16	20	36
15.0						9	13	15	28
16.5						5	8	10	18
18.0						16	22	28	50
19.5						12	18	22	40
21.0	Gary Dense to Very Dense Fine to Medium SAND			5	10.0	10	14	20	34
22.5						10	15	20	35
24.0						9	18	22	40
25.5						7	14	18	32
27.0						5	6	8	14
28.5	Gray Very Stiff Clayey SILT			6	3.0	5	7	8	15
30.0	End of Boring					4	6	9	15
Disturbed Sample(Split Spoon) Undisturbed Sample(Shelby Tube)    Layer1    Layer5 Layer2    Layer6 Layer3    Layer7 Layer4    Layer8									



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M27

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 02.02.2018


Completed on: 02.02.2018

Client : Urban Development Directorate (UDD)  
Project : Mirsharai Upazilla Development Plan

Location : Abdus Sattar Bhuiyan Hat Govt. Primary school, Kata chora

Legend:  
  
  
  
Clay      Silt      Sand

Coordinates: Lat- 22.81188 Long- 91.51746

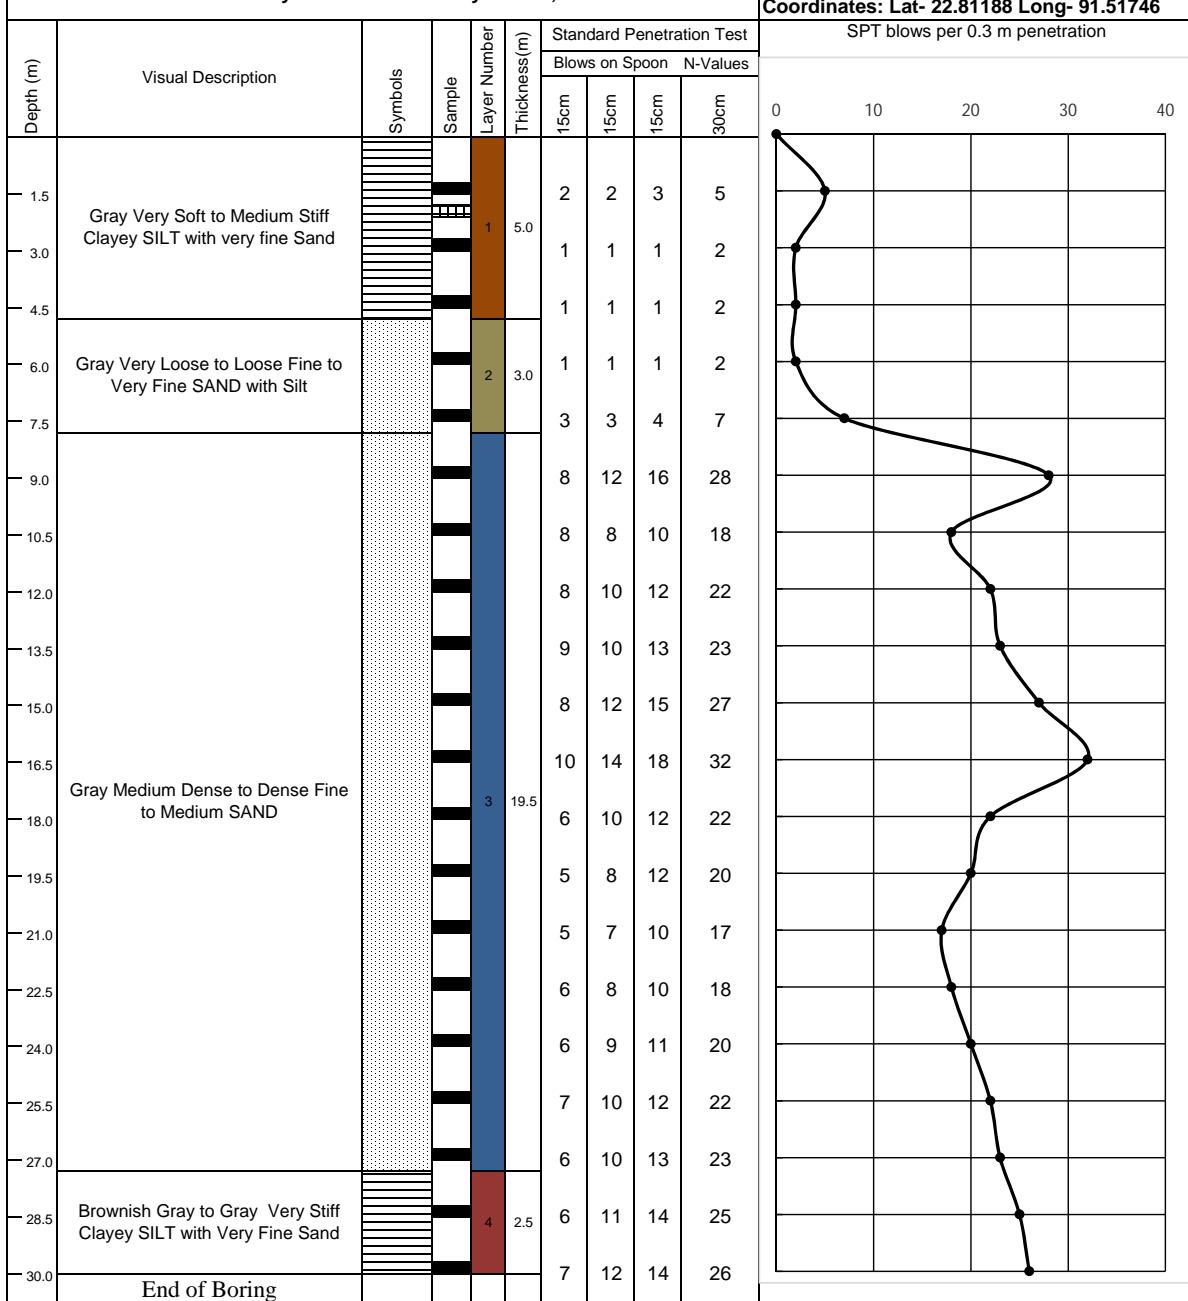

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M28

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 17.02.2018

Completed on: 17.02.2018

Client :Urban Development Directorate (UDD)  
Project : Mirsharai Upazilla Development Plan


Location : Bamon Shundor Govt. Primary School, Kata Chora

## Legend:



Clay      Silt      Sand

Coordinates: Lat- 22.79988 Long- 91.51379

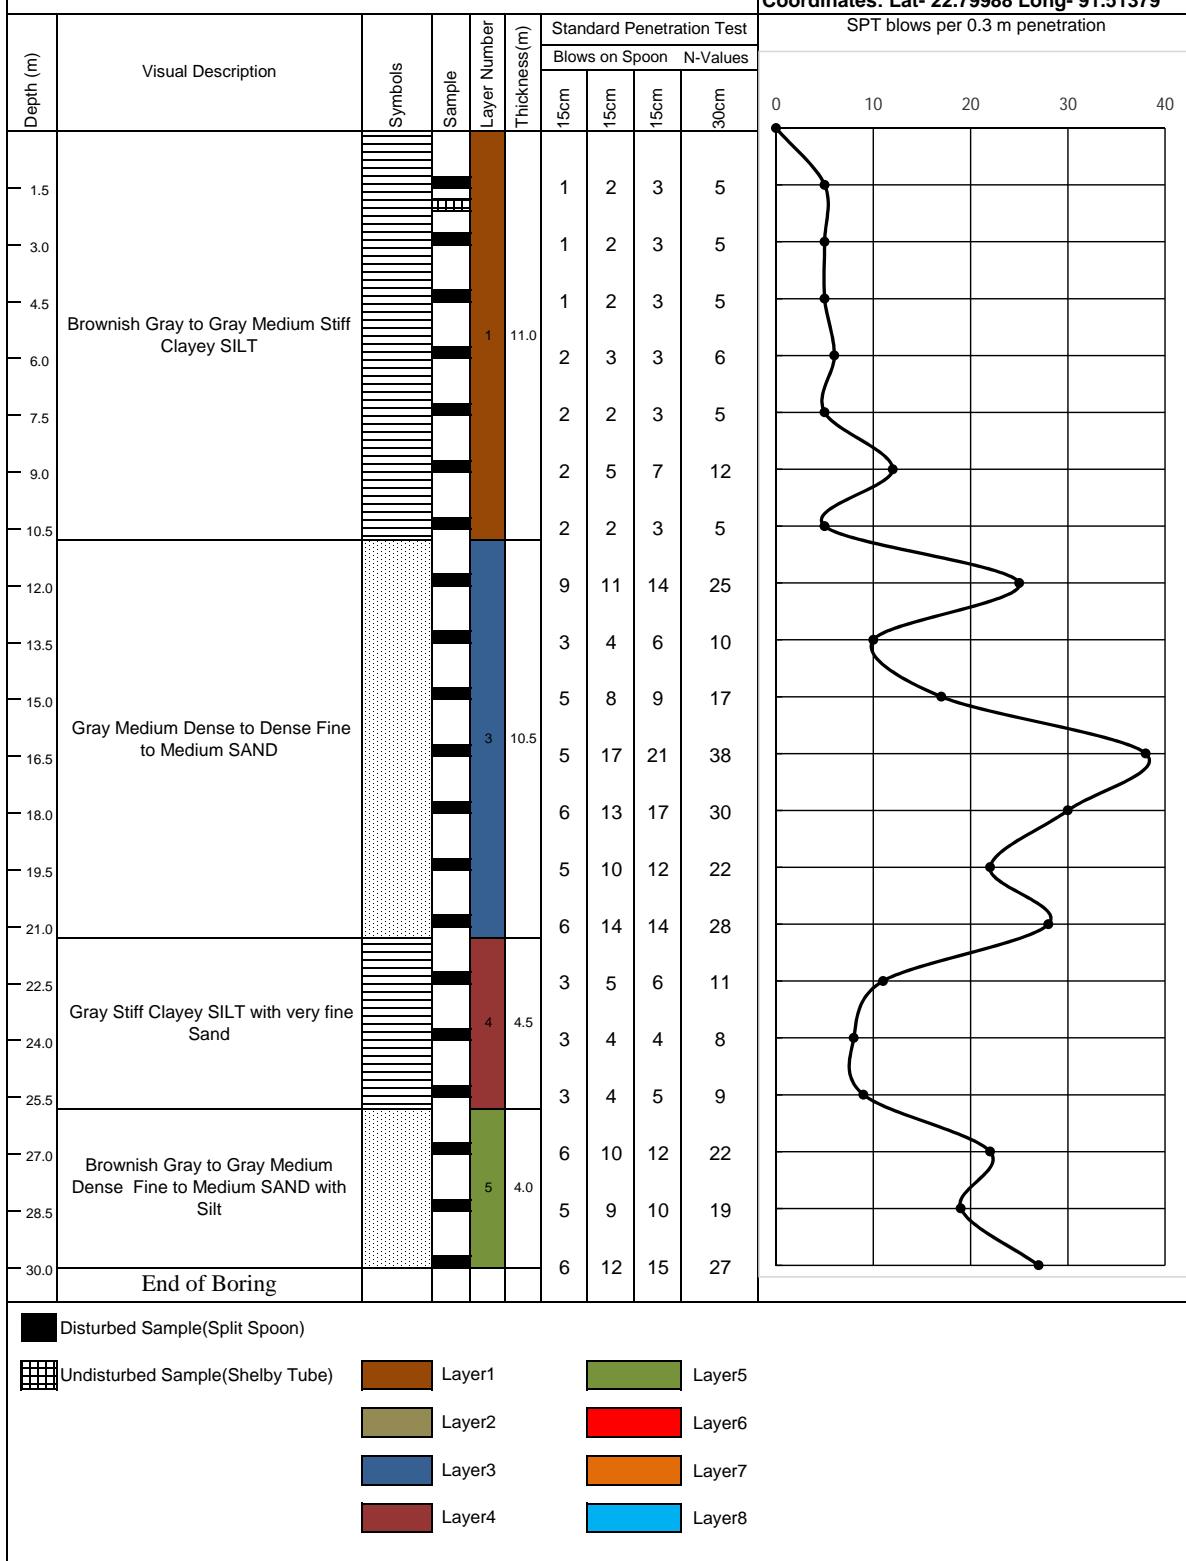 Disturbed Sample(Split Spoon) Undisturbed Sample(Shelby Tube)

Layer1

Layer2

Layer3

Layer4

Layer5

Layer6

Layer7

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M29

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 18.02.2018

Completed on: 18.02.2018


Client : Urban Development Directorate (UDD)  
Project : Mirsharai Upazilla Development Plan

Location : Ahmed Ali Miar Hat Govt Primary School, Kata Chora

**Legend:**

Clay      Silt      Sand

Coordinates: Lat- 22.81297 Long- 91.49413

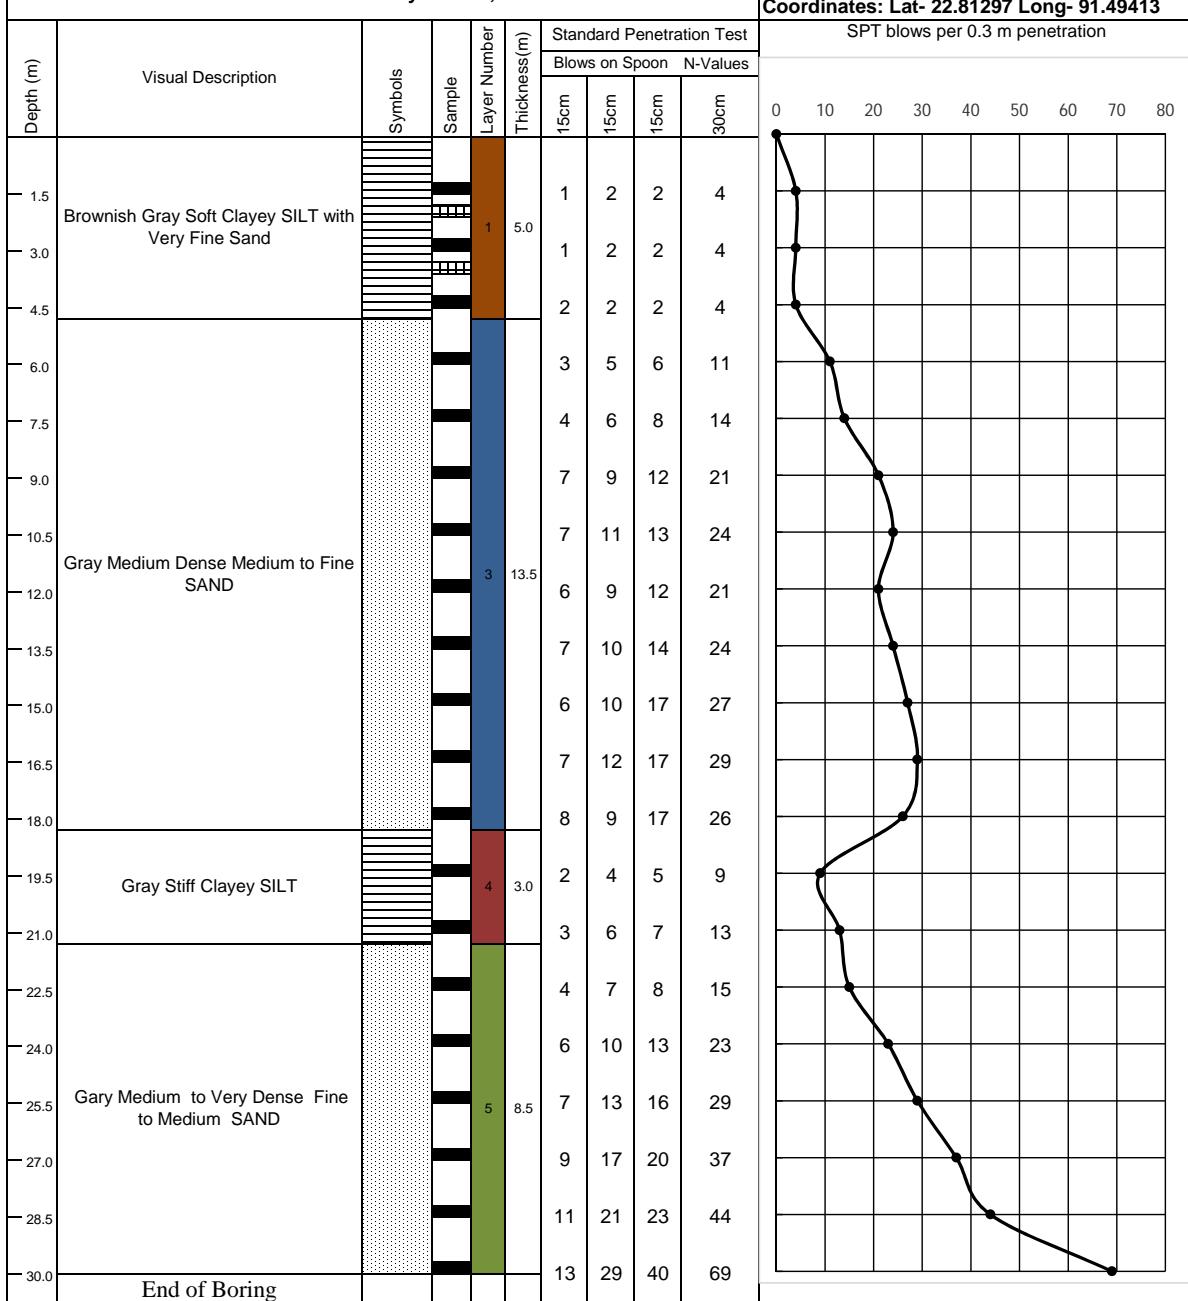

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer2

Layer3

Layer4

Layer5

Layer6

Layer7

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M30

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:



Ground water level: 4.00m below EGL

Started on: 15.02.2018

Completed on: 16.02.2018

Client :Urban Development Directorate (UDD)  
Project : Mirsharai Upazilla Development Plan

Location : Gudaimmar tek, Ichakhali

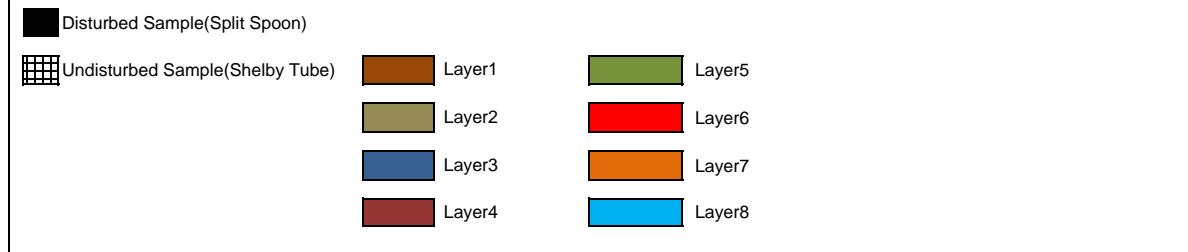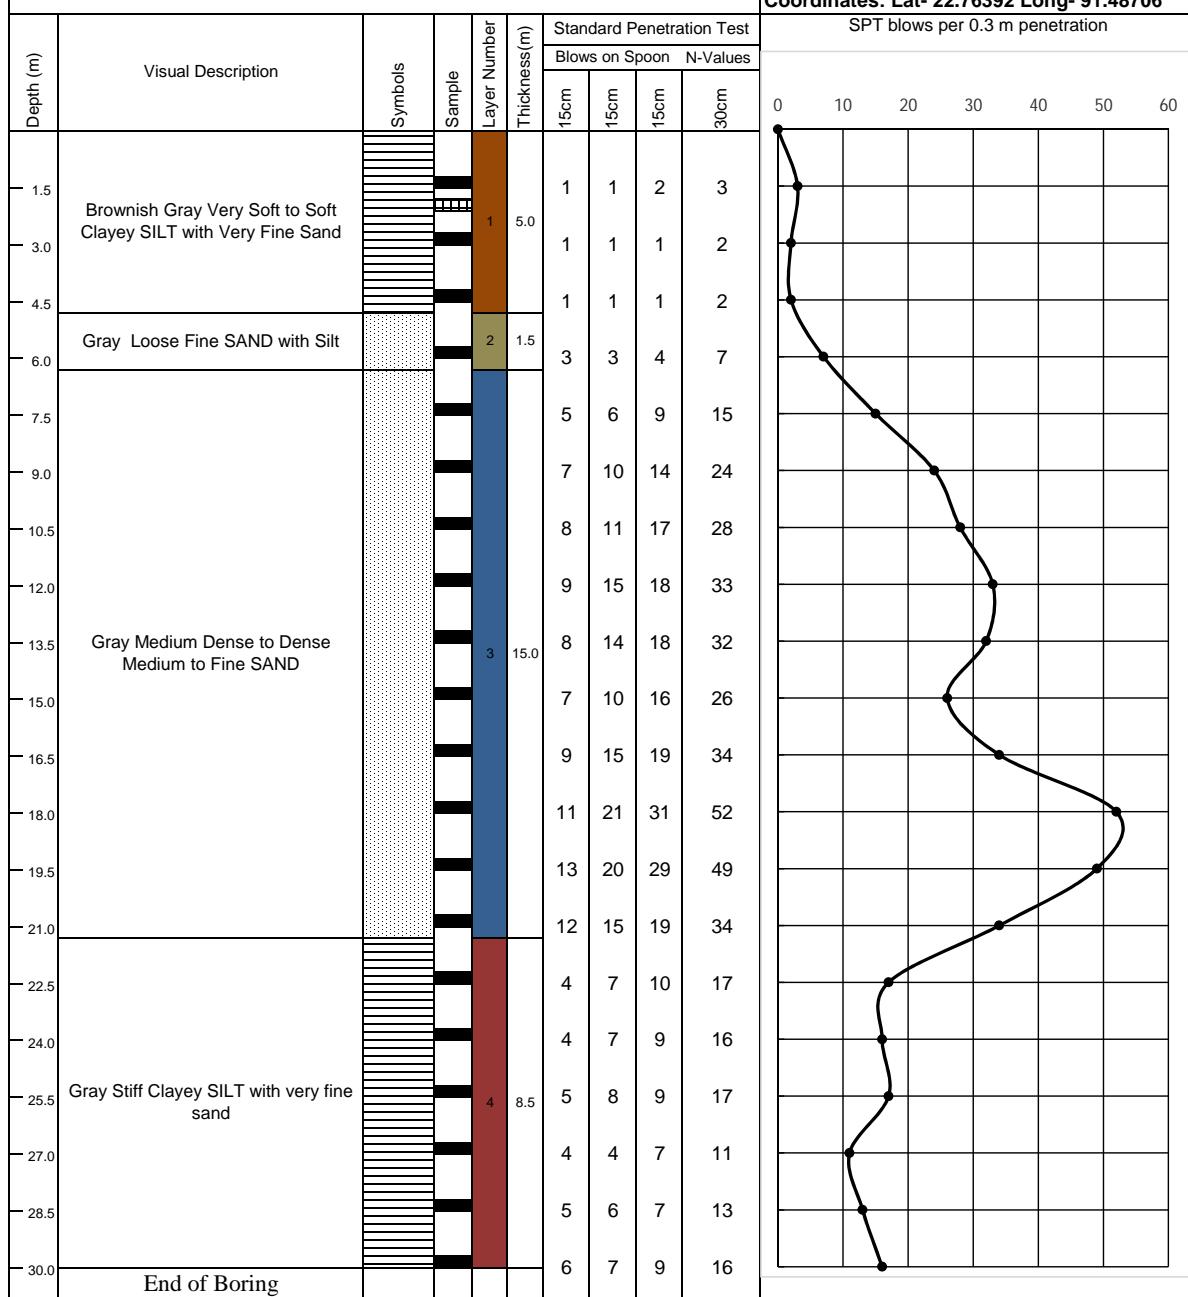Legend:  
  
  
  
 Clay      Silt      Sand  
 Coordinates: Lat- 22.76392 Long- 91.48706



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M31

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:


Ground water level: 4.00m below EGL

Started on: 15.02.2018

Completed on: 15.02.2018

**Client** :Urban Development Directorate (UDD)  
**Project** : Mirsharai Upazilla Development Plan

Location : Char shorot Sharbojonin Charnatia Durga Mondir, Ichakhali

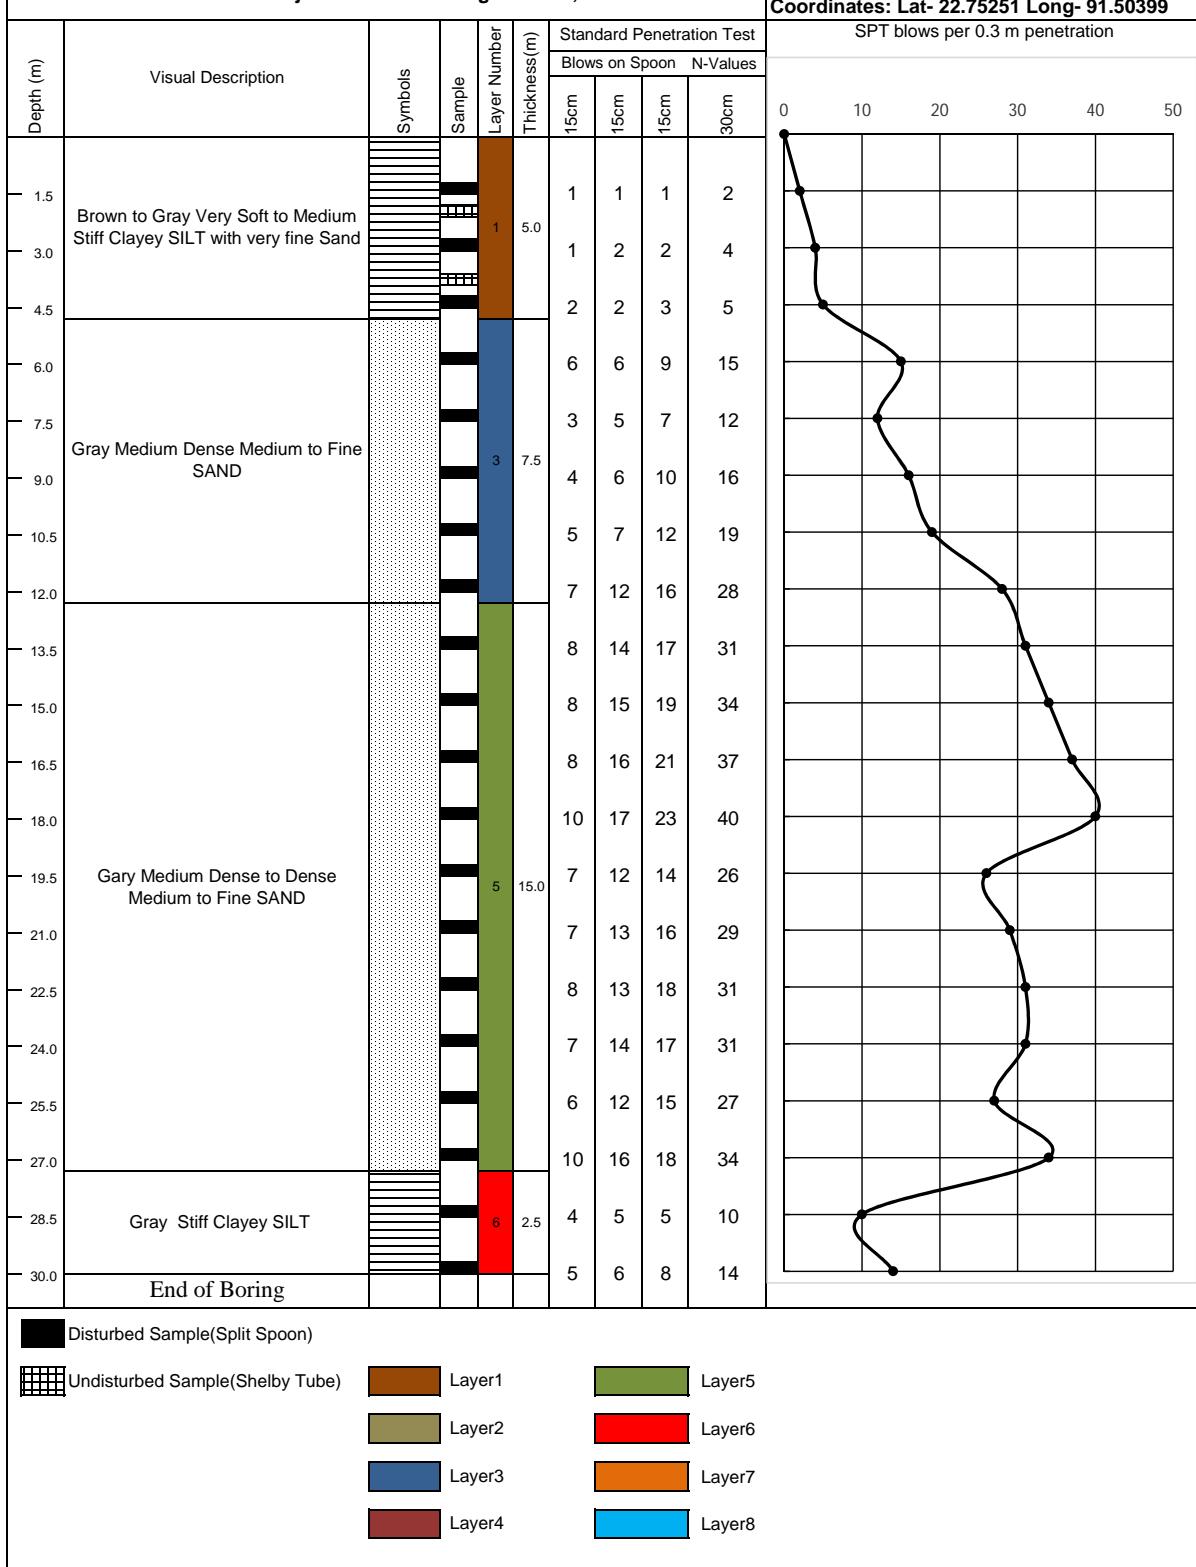



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M32

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Jobayeda Islam Nurani Islamia madrasa

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 18.02.2018

Completed on: 18.02.2018

Legend:



Clay      Silt      Sand

Coordinates: Lat- 22.80081 Long- 91.48951

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration					
						Blows on Spoon N-Values				SPT blows per 0.3 m penetration					
						15cm	15cm	15cm	30cm	0	10	20	30	40	50
1.5	Brownish Gray Very Soft Clayey SILT			1	3.5	1	1	1	2						
3.0						1	1	1	2						
4.5	Gray Very Loose to Medium Dense Very Fine to Fine SAND with Silt			2	4.5	1	1	2	3						
6.0						2	2	5	7						
7.5						3	4	6	10						
9.0						5	7	8	15						
10.5						6	8	10	18						
12.0						5	7	9	16						
13.5	Gray Medium Dense Medium to Fine SAND			3	12.0	6	9	12	21						
15.0						5	6	7	13						
16.5						6	8	10	18						
18.0						7	10	12	22						
19.5						6	11	14	25						
21.0						3	3	5	8						
22.5						3	4	5	9						
24.0	Gray Medium to Very Stiff Clayey SILT with Very Fine Sand			4	10.0	2	3	3	6						
25.5						2	2	3	5						
27.0						4	7	10	17						
28.5						6	9	14	23						
30.0	End of Boring					3	4	5	9						

■ Disturbed Sample(Split Spoon)

■ Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M33

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Muhuri Project, Sluice Gate, Ichakhali

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 19.02.2018

Completed on: 19.02.2018

Legend:



Clay



Silt



Sand

Coordinates: Lat- 22.83434 Long- 91.45464

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon N-Values					
						15cm	15cm	15cm	30cm		
1.5					2	2	3	3	6		
3.0	Brownish Gray Soft to Medium Stiff Clayey SILT with Very Fine Sand		1	6.5	2	2	2	3	5		
4.5					1	1	1	2	3		
6.0					1	2	2	2	4		
7.5	Gray Loose to Medium Dense Very Fine to Fine SAND with Silt		2	3.0	2	3	3	6			
9.0					3	4	6	10			
10.5					5	7	10	17			
12.0					8	12	15	27			
13.5					10	12	16	28			
15.0					8	14	19	33			
16.5	Gray Medium Dense to Dense Medium to Fine SAND		3	15.0	8	13	19	32			
18.0					8	12	19	31			
19.5					11	17	22	39			
21.0					12	18	22	40			
22.5					6	8	8	16			
24.0					2	3	4	7			
25.5					2	3	3	6			
27.0	Gray Medium Stiff Clayey SILT with Very Fine Sand		4	5.5	2	3	4	7			
28.5					2	3	3	6			
30.0	End of Boring				2	3	3	6			

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1  
 Layer2  
 Layer3  
 Layer4

Layer5  
 Layer6  
 Layer7  
 Layer8

Depth (m)	SPT Blow Count
0.0	0
1.5	10
3.0	15
4.5	10
6.0	15
7.5	20
9.0	25
10.5	30
12.0	35
13.5	40
15.0	35
16.5	30
18.0	25
19.5	20
21.0	18
22.5	15
24.0	18
25.5	15
27.0	12
28.5	10
30.0	15

Page 191



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M34

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 14.02.2018

Completed on: 14.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Bamonshundur Forrest Bit Office, Shaherkhali

## Legend:



Clay

Silt

Sand

Coordinates: Lat- 22.7343 Long- 91.50339

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration						
						Blows on Spoon		N-Values								
						15cm	15cm	15cm	30cm	0	10	20	30	40	50	60
1.5	Brownish Gray Soft to Medium Stiff Clayey SILT with Very Fine Sand			1	5.0	2	3	4	7							
3.0						2	2	3	5							
4.5						1	2	2	4							
6.0						5	8	10	18							
7.5						6	8	12	20							
9.0						7	10	13	23							
10.5						8	11	15	26							
12.0						6	10	10	20							
13.5	Gray Medium Dense Fine to Medium SAND			3	18.0	8	10	10	20							
15.0						7	8	11	19							
16.5						8	10	14	24							
18.0						10	11	15	26							
19.5						9	10	13	23							
21.0						5	8	8	16							
22.5	Gray Medium Stiff Clayey SILT with Very Fine Sand			4	1.5	6	8	10	18							
24.0						1	2	2	4							
25.5						17	18	19	37							
27.0	Gary Dense Medium to Fine SAND			5	5.5	9	19	23	42							
28.5						10	21	25	46							
30.0	End of Boring					12	22	27	49							

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M35

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 18.02.2018


Completed on: 18.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Vanguni Bazar Baitunnur Jame Mmosque, Ichakhali

## Legend:




Clay

Silt

Sand

Coordinates: Lat- 22.82661 Long- 91.48335

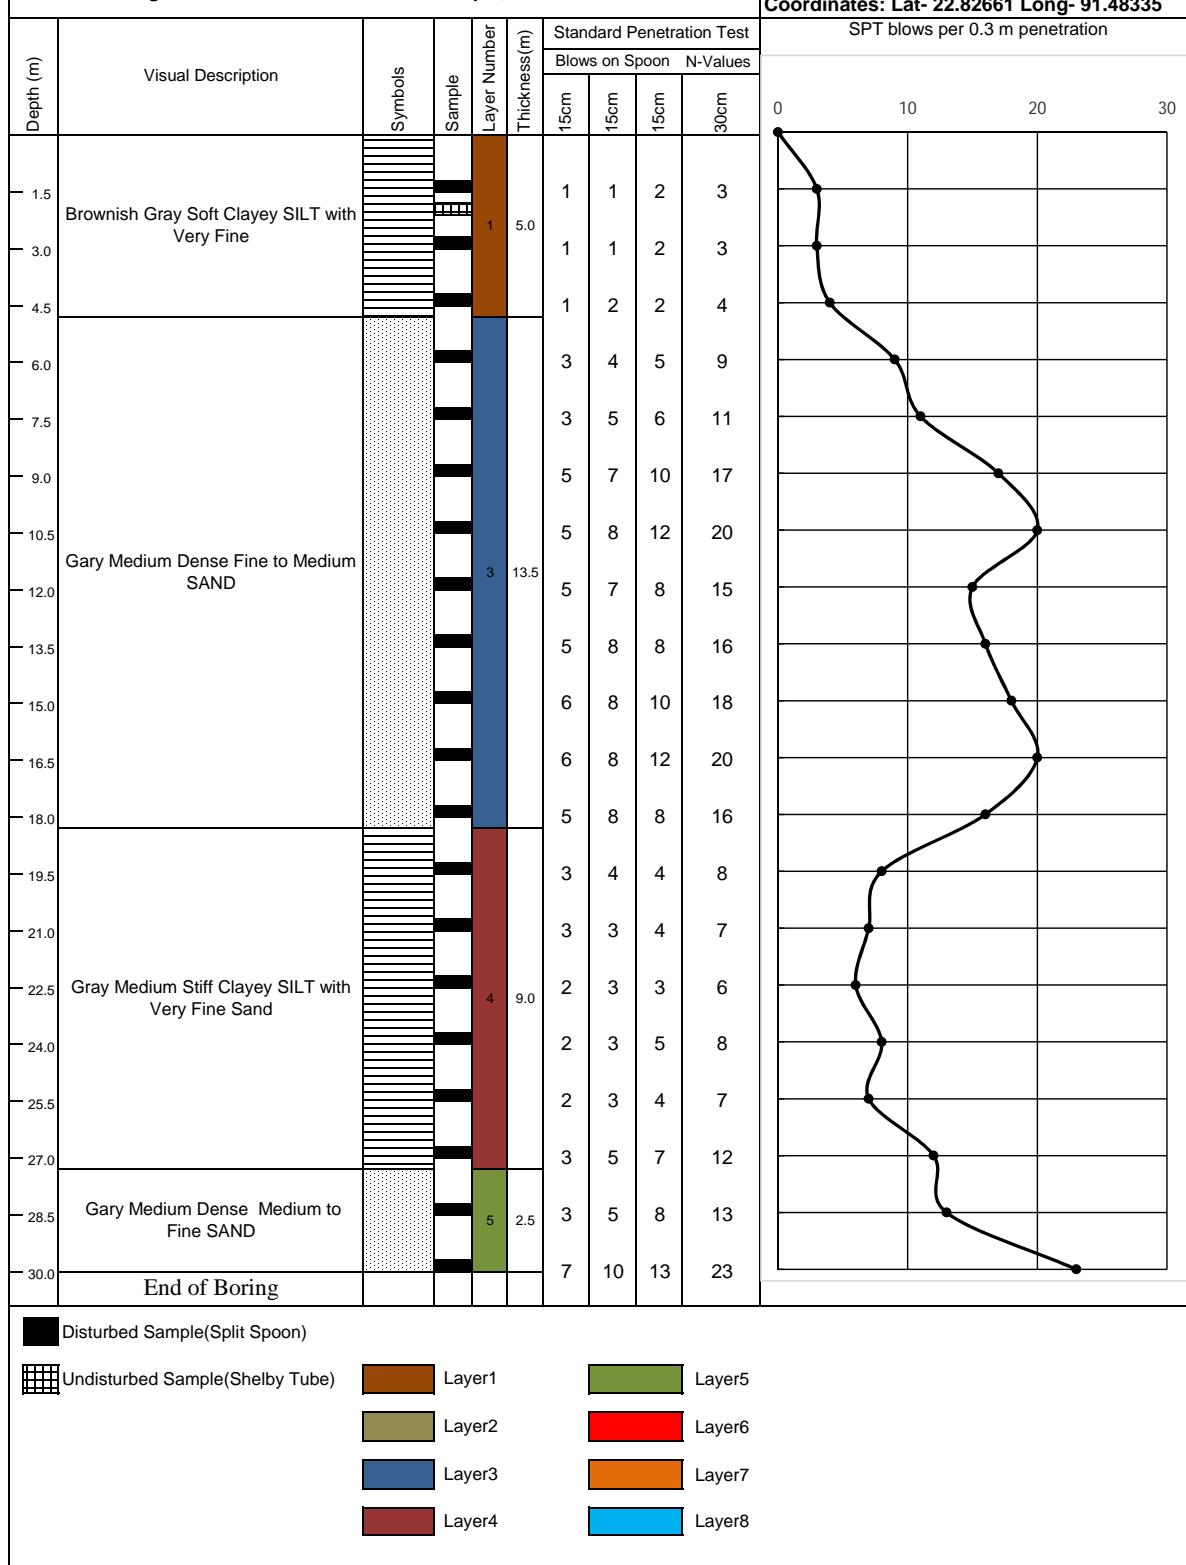



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M36

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL


Started on: 17.02.2018

Completed on: 18.02.2018

Client :Urban Development Directorate (UDD)  
Project : Mirsharai Upazilla Development Plan

Location : Chunumijjer tek,Ichakkhali

## Legend:



Clay

Silt

Sand

Coordinates: Lat- 22.79189 Long- 91.46427

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon N-Values					
						15cm	15cm	15cm	30cm		
1.5	Brownish Gray Soft Clayey SILT with Very Fine Sand			1	3.5	1	1	2	3		
3.0						1	2	2	4		
4.5	Gray Very Loose to Loose Very Fine to Fine SAND with Silt			2	4.5	1	1	1	2		
6.0						1	1	3	4		
7.5						2	2	3	5		
9.0						7	9	10	19		
10.5						7	8	12	20		
12.0						8	11	15	26		
13.5						8	10	16	26		
15.0	Gray Medium Dense to Dense Medium to Fine SAND			3	15.0	7	9	12	21		
16.5						7	10	14	24		
18.0						10	14	17	31		
19.5						10	14	18	32		
21.0						12	13	20	33		
22.5						14	18	23	41		
24.0						3	4	6	10		
25.5	Gray Medium Stiff to Stiff Clayey SILT			4	6.0	3	3	6	9		
27.0						3	3	4	7		
28.5	Gray Medium Dense Fine to Medium SAND with Silt			5	1.0	3	4	4	8		
30.0	End of Boring					8	11	15	26		

 Disturbed Sample(Split Spoon) Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M37

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL


Started on: 15.02.2018

Completed on: 15.02.2018

Client :Urban Development Directorate (UDD)  
Project : Mirsharai Upazilla Development Plan

Location : 94 no. Hasim Nagar Govt. Primary School,

## Legend:



Clay

Silt

Sand

Coordinates: Lat- 22.75204 Long- 91.51743

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon N-Values					
						15cm	15cm	15cm	30cm		
1.5	Brownish Gray Soft Clayey SILT with Very Fine			1	5.0	1	1	2	3		
3.0						1	2	2	4		
4.5						1	0	0	0		
6.0						3	5	6	11		
7.5						3	6	7	13		
9.0						5	8	12	20		
10.5	Gray Medium Dense to Dense Medium to Fine SAND			3	12.0	7	10	15	25		
12.0						8	12	18	30		
13.5						8	14	20	34		
15.0						6	7	11	18		
16.5	Gray Stiff Clayey SILT with Very Fine Sand			4	1.5	4	6	8	14		
18.0						5	7	10	17		
19.5	Gray Medium Dense Medium to Fine SAND			5	3.0	5	7	12	19		
21.0						5	8	13	21		
22.5						3	5	7	12		
24.0						3	5	8	13		
25.5	Gray Medium Stiff to Stiff Clayey SILT with Very Fine Sand			6	8.5	3	4	5	9		
27.0						2	3	4	7		
28.5						3	3	5	8		
30.0	End of Boring					3	5	7	12		

 Disturbed Sample(Split Spoon) Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M38

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL


Started on: 15.02.2018

Completed on: 15.02.2018

**Client :**Urban Development Directorate (UDD)  
**Project :**Mirsharai Upazilla Development Plan

Location : Ichakhali Economic Zone Office, Ichakhali

## Legend:



Clay

Silt

Sand

Coordinates: Lat- 22.76242 Long- 91.46612

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon N-Values					
						15cm	15cm	15cm	30cm		
1.5					1	1	1	2	3		
3.0					1	1	1	1	2		
4.5	Gray Soft Clayey SILT with Very Fine Sand			1	11.0	1	1	1	2		
6.0					1	1	1	2	3		
7.5					1	2	2	2	4		
9.0					1	2	2	2	4		
10.5					2	3	3	3	6		
12.0					5	7	10	17			
13.5					5	8	12	20			
15.0					7	10	14	24			
16.5					8	11	16	27			
18.0	Gary Medium Dense Medium to Fine SAND			3	14.5	5	8	12	20		
19.5					6	10	13	23			
21.0					6	10	12	22			
22.5					7	10	14	24			
24.0					3	4	6	10			
25.5					3	5	7	12			
27.0	Gray Medium Stiff Clayey SILT			4	4.5	3	4	4	8		
28.5					2	2	3	5			
30.0	End of Boring				2	2	3	5			

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer2

Layer3

Layer4

Layer5

Layer6

Layer7

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M39

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 16.02.2018

Completed on: 16.02.2018

Client :Urban Development Directorate (UDD)  
Project : Mirsharai Upazilla Development Plan

Location : Lodiakhali, Ichakhali

Legend:  
  
  
  
Coordinates: Lat- 22.78207 Long- 91.47032

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon N-Values					
						15cm	15cm	15cm	30cm		
1.5					1	1	2	3	5		
3.0	Brownish Gray Very Soft to Medium Stiff Clayey SILT with Very Fine Sand			1	8.0	1	1	2	3		
4.5						1	1	1	2		
6.0						1	1	1	2		
7.5						1	1	1	2		
9.0						3	5	8	13		
10.5						4	6	10	16		
12.0						5	8	12	20		
13.5						7	10	14	24		
15.0	Gray Medium Dense to Dense Medium to Fine SAND			3	15.0	8	12	16	28		
16.5						10	12	17	29		
18.0						8	12	15	27		
19.5						8	14	16	30		
21.0						10	16	18	34		
22.5						10	16	19	35		
24.0	Gray Medium Stiff Clayey SILT			4	4.5	2	2	3	5		
25.5						2	3	3	6		
27.0						2	2	3	5		
28.5	Gray Medium Dense Fine to Medium SAND with Silt			5	2.5	6	10	13	23		
30.0	End of Boring					7	10	14	24		

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7


Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

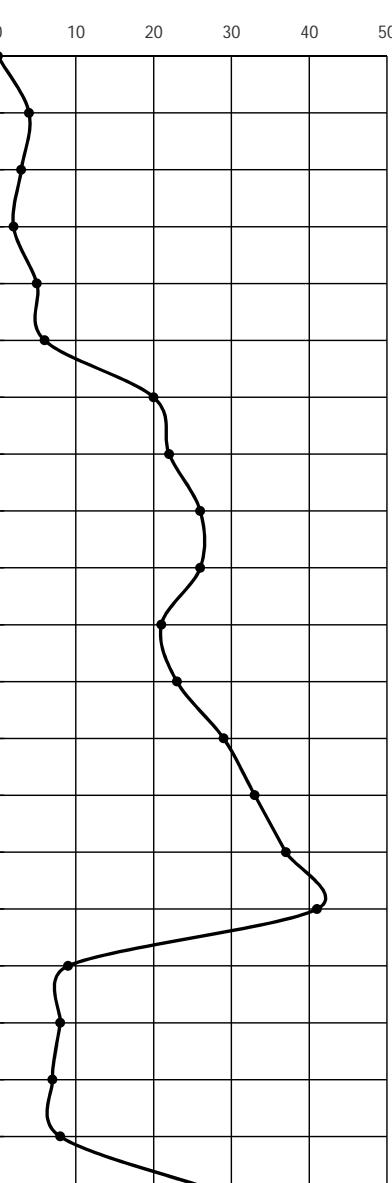Bore hole No: BH-M40 Method of Boring: Percussion Boring Dia.:100(mm) Boring Depth: 30.0m						Existing ground level: Ground water level: 4.00m below EGL Started on: 17.02.2018 Completed on: 17.02.2018				
Client :Urban Development Directorate (UDD) Project : Mirsharai Upazilla Development Plan Location : Sony Mijer tek, Tekerhat Bazar,Ichakhali						Legend:  Clay  Silt  Sand				
						Coordinates: Lat- 22.81053 Long- 91.47058				
Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				
						Blows on Spoon		N-Values		
	15cm	15cm	15cm	30cm		SPT blows per 0.3 m penetration				
1.5	Brownish Gray Soft Clayey SILT with Very Fine Sand			1	3.5	1	2	2	4	
3.0						1	1	2	3	
4.5	Gray Very Loose to Loose Very Fine to Fine SAND with Silt			2	4.5	1	1	1	2	
6.0						1	2	3	5	
7.5						2	3	3	6	
9.0						7	10	10	20	
10.5						7	10	12	22	
12.0						8	12	14	26	
13.5						8	11	15	26	
15.0	Gray Medium Dense to Dense Medium to Fine SAND			3	15.0	7	10	11	21	
16.5						7	10	13	23	
18.0						10	13	16	29	
19.5						10	15	18	33	
21.0						12	17	20	37	
22.5						14	19	22	41	
24.0						3	3	6	9	
25.5	Gray Medium Stiff to Stiff Clayey SILT			4	6.0	3	3	5	8	
27.0						3	3	4	7	
28.5	Gray Medium Dense Fine to Medium SAND with Silt			5	1.0	3	4	4	8	
30.0	End of Boring					8	12	17	29	
 Disturbed Sample(Split Spoon)  Undisturbed Sample(Shelby Tube)  Layer1  Layer5  Layer2  Layer6  Layer3  Layer7  Layer4  Layer8										



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M41 Method of Boring: Percussion Boring Dia.:100(mm) Boring Depth: 30.0m							Exixting ground level: Ground water level: 4.00m below EGL Started on: 20.02.2018 Completed on: 20.02.2018		
Client :Urban Development Directorate (UDD) Project : Mirsharai Upazilla Development Plan Location : Ichakhali Economic Zone, Ichakhali							Legend: Clay    Silt    Sand Coordinates: Lat- 22.82266 Long- 91.44786		
Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test			
						Blows on Spoon	N-Values	15cm	30cm
1.5	Brownish Gray Soft to Medium Stiff Clayey SILT with Very Fine Sand		1	5.0	2	3	4	7	
3.0					1	1	2	3	
4.5					1	2	2	4	
6.0					3	5	6	11	
7.5					7	10	15	25	
9.0					8	13	19	32	
10.5	Gray Medium Dense Medium to Fine SAND		3	12.0	6	8	12	20	
12.0					5	7	10	17	
13.5					6	9	14	23	
15.0					7	12	15	27	
16.5					5	10	13	23	
18.0					7	12	16	28	
19.5					8	14	17	31	
21.0					7	15	17	32	
22.5	Gary Medium Dense to Very Dense Medium to Fine SAND		5	13.0	7	16	20	36	
24.0					10	19	23	42	
25.5					8	14	18	32	
27.0					12	20	25	45	
28.5					14	22	27	49	
30.0	End of Boring				16	28	22	50	
Disturbed Sample(Split Spoon) Undisturbed Sample(Shelby Tube)									
Layer1    Layer5 Layer2    Layer6 Layer3    Layer7 Layer4    Layer8									



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M42

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 19.02.2018

Completed on: 19.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Kazigram govt. Primary School, Ichakhali

## Legend:



Clay      Silt      Sand

Coordinates: Lat- 22.82931 Long- 91.50229

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon N-Values					
						15cm	15cm	15cm	30cm		
1.5					6.5	1	1	2	3		
3.0	Brownish Gray to Gray Soft to Very Stiff Clayey SILT with Very Fine Sand			1	6.5	1	2	2	4		
4.5						1	0	1	1		
6.0						1	1	2	3		
7.5	Gray Loose Very Fine to Fine SAND with Silt			2	1.5	2	3	5	8		
9.0						4	6	9	15		
10.5						5	7	8	15		
12.0						6	8	11	19		
13.5	Gray Medium Dense Medium to Fine SAND			3	12.0	7	8	13	21		
15.0						7	10	14	24		
16.5						6	12	15	27		
18.0						7	14	17	31		
19.5						8	10	12	22		
21.0						4	5	6	11		
22.5	Gray Stiff Clayey SILT with Very Fine Sand			4	7.5	3	5	8	13		
24.0						3	6	8	14		
25.5						4	6	9	15		
27.0						3	3	5	8		
28.5	Gray Medium Dense Medium to Fine SAND			5	2.5	6	10	16	26		
30.0	End of Boring					3	5	6	11		

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M43

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Rajamiar Farm, Char Shorot, Ichakhali

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 15.02.2018

Completed on: 15.02.2018

Legend:



Clay      Silt      Sand

Coordinates: Lat- 22.74718 Long- 91.48854

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon		N-Values			
						15cm	15cm	15cm	30cm		
1.5					2	2	3	4	7		
3.0	Brownish Gray Medium Stiff Clayey SILT with Very Fine Sand			1	8.0	2	3	3	6		
4.5						2	2	3	5		
6.0						1	1	2	3		
7.5						1	2	2	4		
9.0						5	7	7	14		
10.5						5	8	9	17		
12.0						6	8	11	19		
13.5						7	10	12	22		
15.0	Brownish Gray Medium Dense to Dense Medium to Fine SAND			3	15.0	7	10	15	25		
16.5						8	13	16	29		
18.0						10	14	18	32		
19.5						10	16	20	36		
21.0						8	12	16	28		
22.5						8	13	17	30		
24.0	Gray Medium Stiff Clayey SILT			4	3.0	3	4	4	8		
25.5	Gray Medium Dense to Dense Fine SAND with Silt			5	1.5	3	4	5	9		
27.0						10	15	17	32		
28.5	Gray Medium Stiff Clayey SILT			6	2.5	3	5	7	12		
30.0	End of Boring					3	5	8	13		

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6


Layer3

Layer7

Layer4

Layer8

SPT blows per 0.3 m penetration

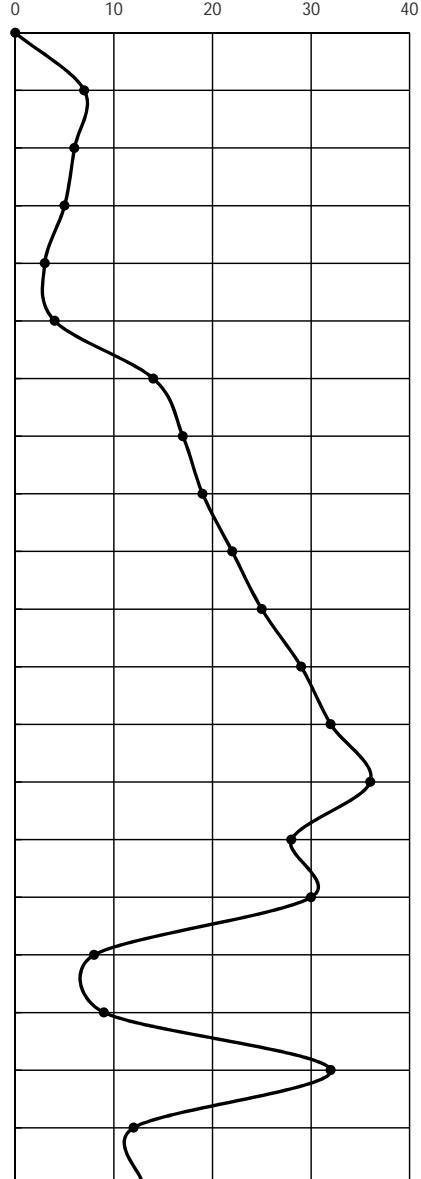



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M44

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 15.02.2018

Completed on: 15.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Rahmatabad, Ichakhali

## Legend:




Clay

Silt

Sand

Coordinates: Lat- 22.77602 Long- 91.49851

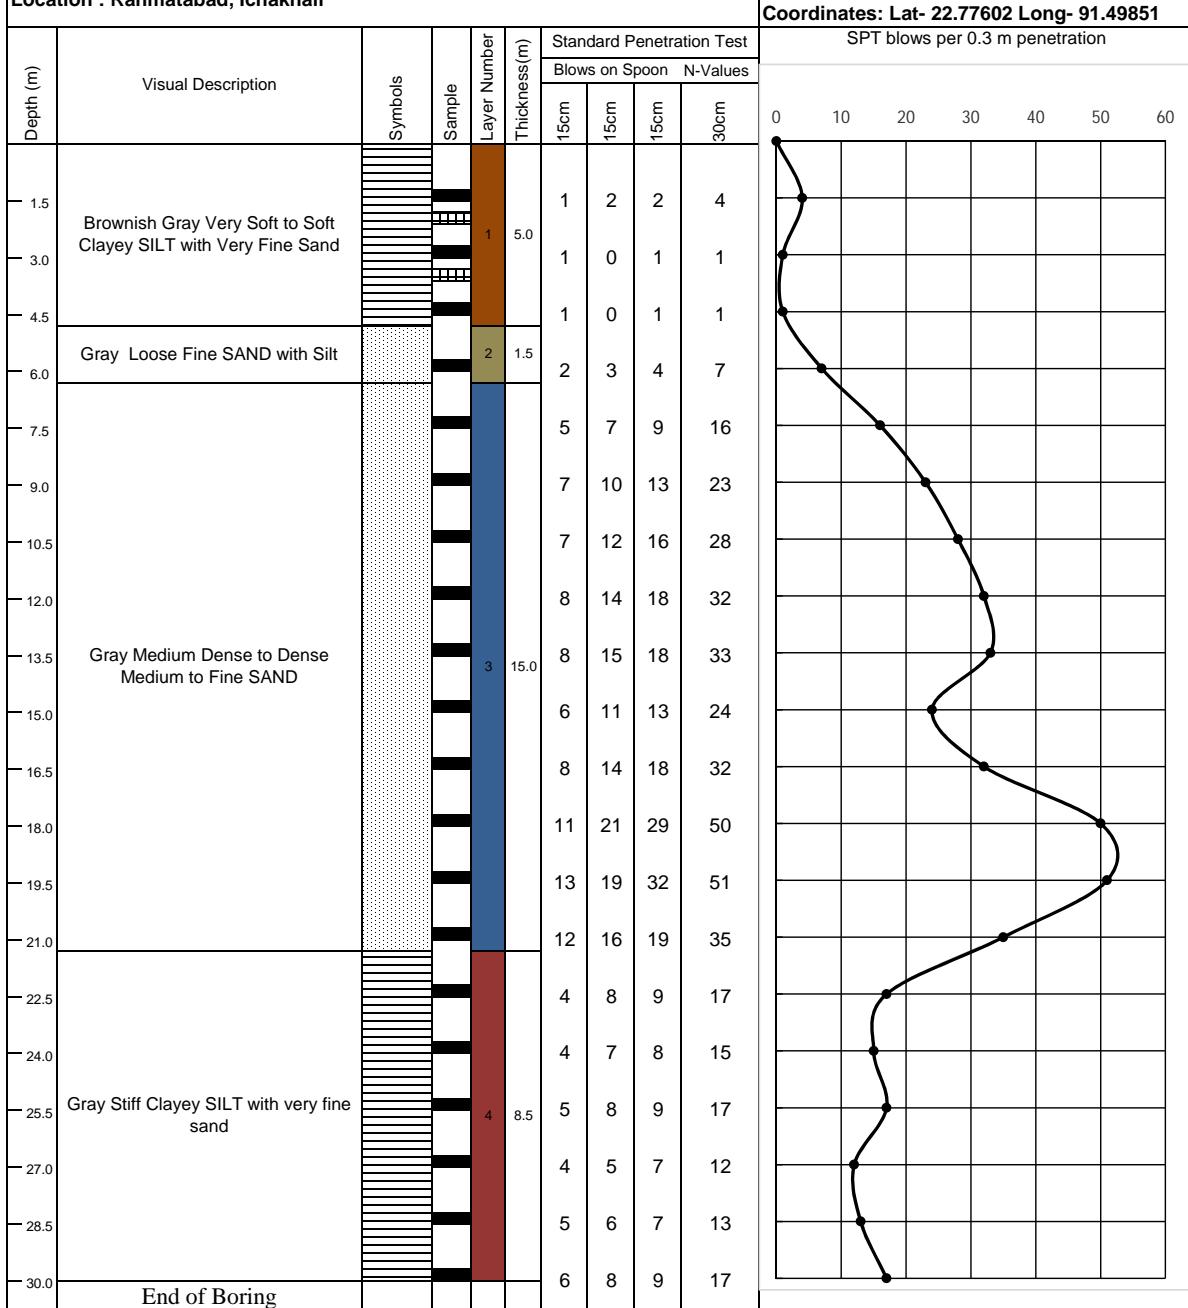

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M45

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 02.02.2018

Completed on: 02.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Mohamaya Eco Park, Durgapur

## Legend:



Clay      Silt      Sand

Coordinates: Lat- 22.81944 Long- 91.56983

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon		N-Values			
						15cm	15cm	15cm	30cm		
1.5					5	5	7	10	17		
3.0					11	11	19	23	42		
4.5					17	17	30	35	65		
6.0					21	21	35	48	83		
7.5					19	19	33	47	80		
9.0					18	18	31	41	72		
10.5					18	18	30	39	69		
12.0					21	21	35	40	75		
13.5					22	22	33	38	71		
15.0	Redish Brown to Gray Dense to Very Dense Medium to Fine SAND with Silt			7	30.0	50	50	76	126		
16.5						50	100	0	100		
18.0						100	100	0	100		
19.5						100	100	0	100		
21.0						100	100	0	100		
22.5						100	100	0	100		
24.0						100	100	0	100		
25.5						100	100	0	100		
27.0						0	0	0	0		
28.5						0	0	0	0		
30.0	End of Boring					0	0	0	0		

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M46

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 03.02.2018

Completed on: 03.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Mithachora Bazar , Mirshorai

## Legend:




Clay

Silt

Sand

Coordinates: Lat- 22.80319 Long- 91.5599

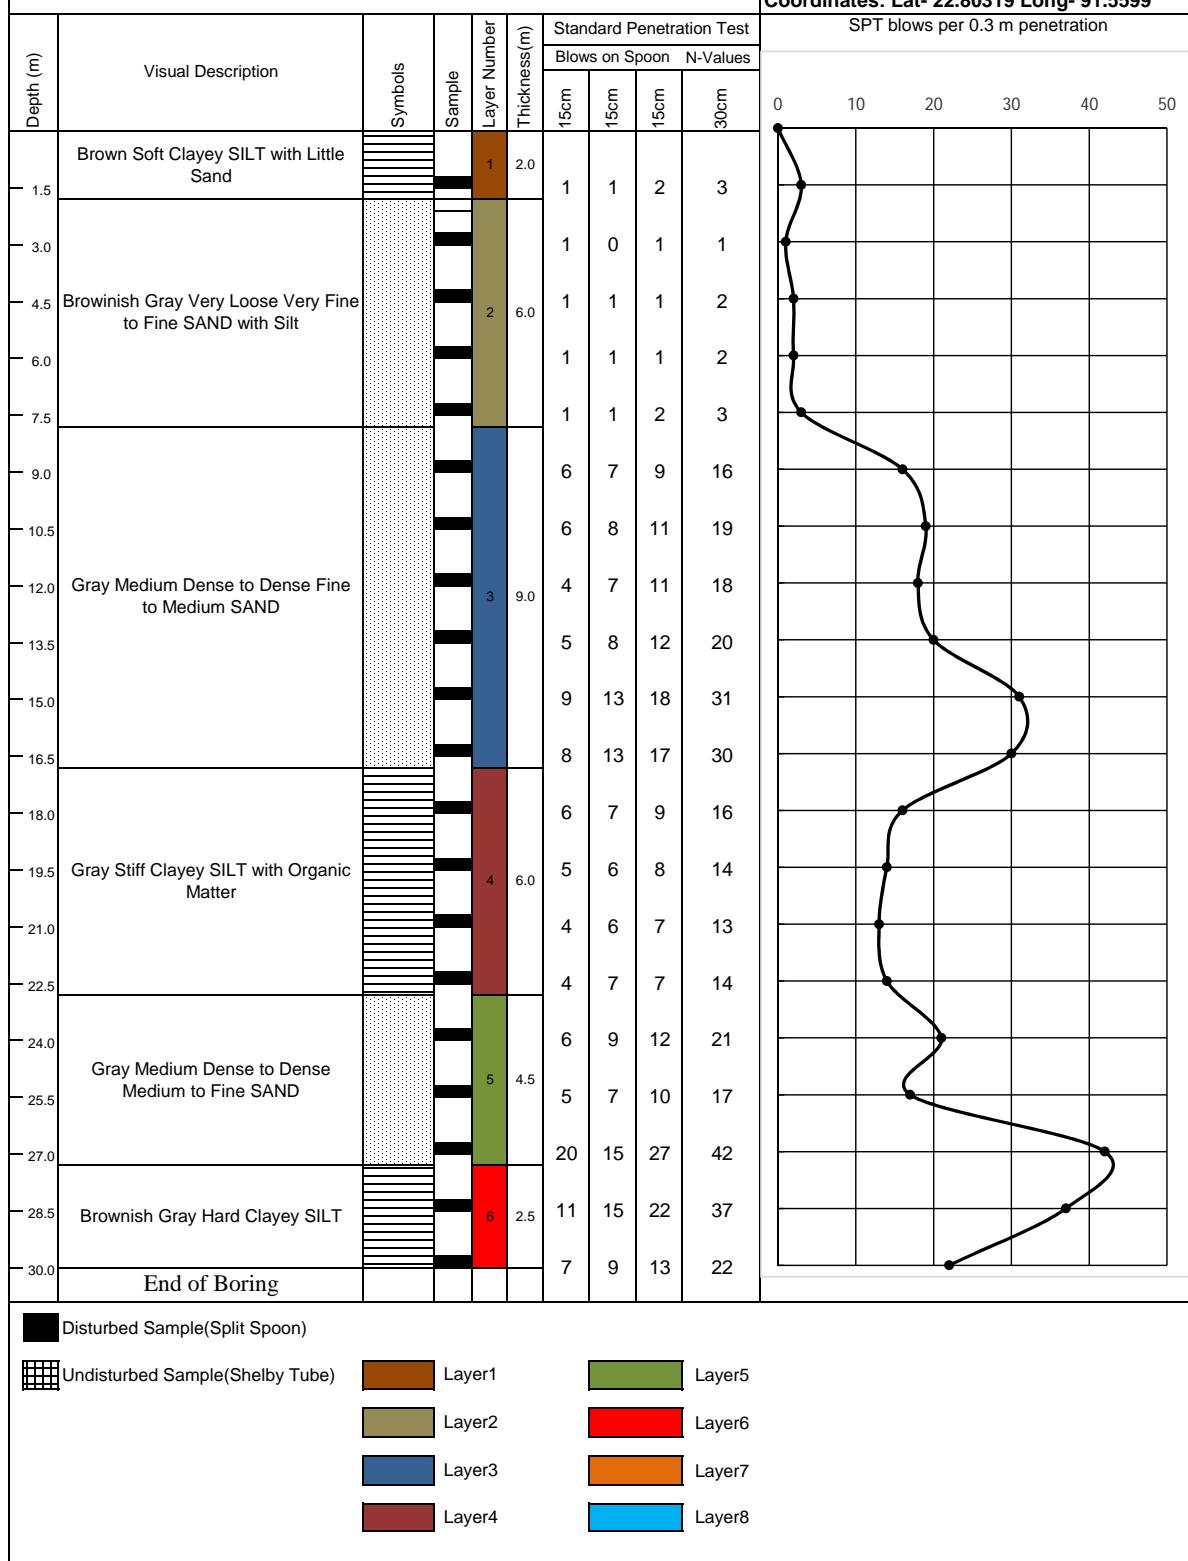



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M47

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 08.02.2018

Completed on: 08.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : South Talbaria, Mirshorai

## Legend:



Clay

Silt

Sand

Coordinates: Lat- 22.78553 Long- 91.57944

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration							
						Blows on Spoon		N-Values									
						15cm	15cm	15cm	30cm	0	10	20	30	40	50	60	70
1.5	Brownish Gray Soft to Medium Stiff Clayey SILT with little Sand			1	5.0	1	2	2	4								
3.0						2	2	3	5								
4.5						2	3	3	6								
6.0	Brownish Gray Loose to medium Dense Very Fine to Fine SAND with Silt			2	6.0	3	4	4	8								
7.5						3	4	6	10								
9.0						6	8	9	17								
10.5						9	9	10	19								
12.0						9	10	10	20								
13.5						8	10	12	22								
15.0	Gray Medium Dense to Very Dense Fine to medium SAND			3	9.0	20	30	30	60								
16.5						17	30	20	50								
18.0						12	16	20	36								
19.5						13	17	22	39								
21.0						11	15	19	34								
22.5						10	14	18	32								
24.0	Brownish Gray Very Stiff to Hard Clayey SILT			6	10.0	8	12	17	29								
25.5						7	11	13	24								
27.0						6	10	12	22								
28.5						7	10	13	23								
30.0	End of Boring					5	7	10	17								

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M48

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 05.02.2018

Completed on: 05.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : East Ambaria, Mirshorai

## Legend:



Clay      Silt      Sand

Coordinates: Lat- 22.7794 Long- 91.59575

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration							
						Blows on Spoon		N-Values									
						15cm	15cm	15cm	30cm	0	10	20	30	40	50	60	70
1.5					5	5	7	10	17								
3.0					6	6	10	14	24								
4.5					7	7	12	16	28								
6.0	Brownish Gray Very Stiff Clayey Silt		6		11.0	8	14	19	33								
7.5						8	15	20	35								
9.0						10	16	22	38								
10.5						10	15	20	35								
12.0						20	35	45	80								
13.5						25	45	50	95								
15.0						70	50	0	50								
16.5						80	50	0	50								
18.0						50	50	0	50								
19.5	Brownish Gray Hard Silty CLAY/SHALE		8		19.0	50	50	0	50								
21.0						50	50	0	50								
22.5						50	50	0	50								
24.0						50	50	0	50								
25.5						60	50	0	50								
27.0						70	50	0	50								
28.5						65	50	0	50								
30.0	End of Boring					70	50	0	50								

■ Disturbed Sample(Split Spoon)

■ Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M49

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 02.02.2018

Completed on: 02.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Ora Kazi Mijibari Jame Mosque, Mirshorai

## Legend:



Clay

Silt

Sand

Coordinates: Lat- 22.78863 Long- 91.55093

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon		N-Values			
						15cm	15cm	15cm	30cm		
1.5	Gray Medium Stiff Clayey SILT with Very Fine Sand			1	3.5	2	3	4	7		
3.0				2	1.5	2	3	4	7		
4.5	Gray Very Loose Very Fine to Fine SAND with Silt					1	0	1	1		
6.0						5	5	6	11		
7.5						5	7	8	15		
9.0						4	4	8	12		
10.5	Gray Medium Dense Medium to Fine SAND			3	12.0	2	5	6	11		
12.0						3	4	8	12		
13.5						4	5	8	13		
15.0						4	7	9	16		
16.5						4	5	8	13		
18.0						4	9	12	21		
19.5						5	10	10	20		
21.0						5	12	15	27		
22.5	Brownish Gray Very Stiff Clayey SILT			4	13.0	7	13	16	29		
24.0						4	5	8	13		
25.5						3	4	6	10		
27.0						5	6	8	14		
28.5						5	6	9	15		
30.0	End of Boring					4	5	7	12		

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M50

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 07.02.2018

Completed on: 07.02.2018

Client :Urban Development Directorate (UDD)  
Project : Mirsharai Upazilla Development Plan

Location : Mirsharai Degree College, Mirsharai

Legend:  
  
  
  
 Clay      Silt      Sand  
 Coordinates: Lat- 22.77792 Long- 91.57289

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon		N-Values			
						15cm	15cm	15cm	30cm		
1.5					2	2	2	2	4		
3.0	Brownish Gray to Gray Very Loose to Loose Very Fine to Fine SAND with Silt			2	8.0	2	2	3	5		
4.5					2	2	2	2	4		
6.0					1	1	1	2	3		
7.5					1	2	2	2	4		
9.0					5	10	13	23			
10.5					6	12	13	25			
12.0					5	7	8	15			
13.5					5	8	8	16			
15.0	Gray Medium Dense Medium to Fine SAND			3	15.0	8	12	15	27		
16.5					8	17	17	34			
18.0					5	7	7	14			
19.5					5	8	10	18			
21.0					6	8	12	20			
22.5					6	8	13	21			
24.0					5	8	12	20			
25.5	Gray Medium to Stiff Clayey SILT with Very Fine Sand			4	7.0	6	11	12	23		
27.0					6	9	11	20			
28.5					7	10	13	23			
30.0	End of Boring				8	10	14	24			

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M51

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 04.02.2018

Completed on: 04.02.2018

Client :Urban Development Directorate (UDD)  
Project : Mirsharai Upazilla Development Plan

Location : North Talbaria Govt. Primary School, Mirshorai

## Legend:



Clay

Silt

Sand

Coordinates: Lat- 22.79426 Long- 91.57335

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration							
						Blows on Spoon N-Values											
						15cm	15cm	15cm	30cm	0	20	40	60	80	100	120	140
1.5	Brownish Gray Medium Stiff Clayey SILT with Very Fine Sand			1	2.0	2	2	3	5								
3.0	Brownish Gray to Gray Loose Very Fine to Fine SAND with Silt			2	4.5	2	3	3	6								
4.5						2	3	4	7								
6.0						3	4	4	8								
7.5						3	5	7	12								
9.0	Gray Medium Dense Medium to Fine SAND with little silt			3	7.5	7	10	13	23								
10.5						8	12	15	27								
12.0						4	5	7	12								
13.5						5	8	8	16								
15.0	Brownish gray to Gray Stiff to Very Stiff Clayey SILT			4	6.0	5	8	10	18								
16.5						5	8	11	19								
18.0						3	4	6	10								
19.5						3	5	6	11								
21.0						8	14	20	34								
22.5						16	30	65	95								
24.0	Gray Dense to Very Dense Fine to Medium SAND			7	10.0	18	38	70	108								
25.5						20	45	75	120								
27.0						45	48	79	127								
28.5						50	52	80	132								
30.0	End of Boring					48	51	85	136								

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M52

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 09.02.2018

Completed on: 09.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Hamid Ali Jame Mosque, East Khoiachora

## Legend:



Clay

Silt

Sand

Coordinates: Lat- 22.76701 Long- 91.58471

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration							
						Blows on Spoon		N-Values									
						15cm	15cm	15cm	30cm	0	10	20	30	40	50	60	70
1.5	Brownish Gray Soft to Medium Stiff Clayey SILT with Very Fine Sand			1	5.0	1	1	2	3								
3.0						2	2	2	4								
4.5						2	3	3	6								
6.0						2	3	3	6								
7.5	Gray Loose to Very Loose Very Fine to Fine SAND with Silt			2	6.0	2	3	4	7								
9.0						2	2	3	5								
10.5						1	2	2	4								
12.0						5	8	8	16								
13.5						5	8	10	18								
15.0						4	5	7	12								
16.5	Gray Medium Dense Medium to Fine SAND			3	13.5	5	7	10	17								
18.0						5	7	8	15								
19.5						5	6	8	14								
21.0						5	5	6	11								
22.5						5	5	7	12								
24.0						10	15	17	32								
25.5						16	25	30	55								
27.0	Gray Medium Dense to Very Dense Medium to Fine SAND			5	5.5	18	27	33	60								
28.5						16	25	28	53								
30.0	End of Boring					18	28	32	60								

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M53

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 03.02.2018


Completed on: 03.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Khankaye Latifia Madrasa, Mirsharai

## Legend:




Clay

Silt

Sand

Coordinates: Lat- 22.7811 Long- 91.56298

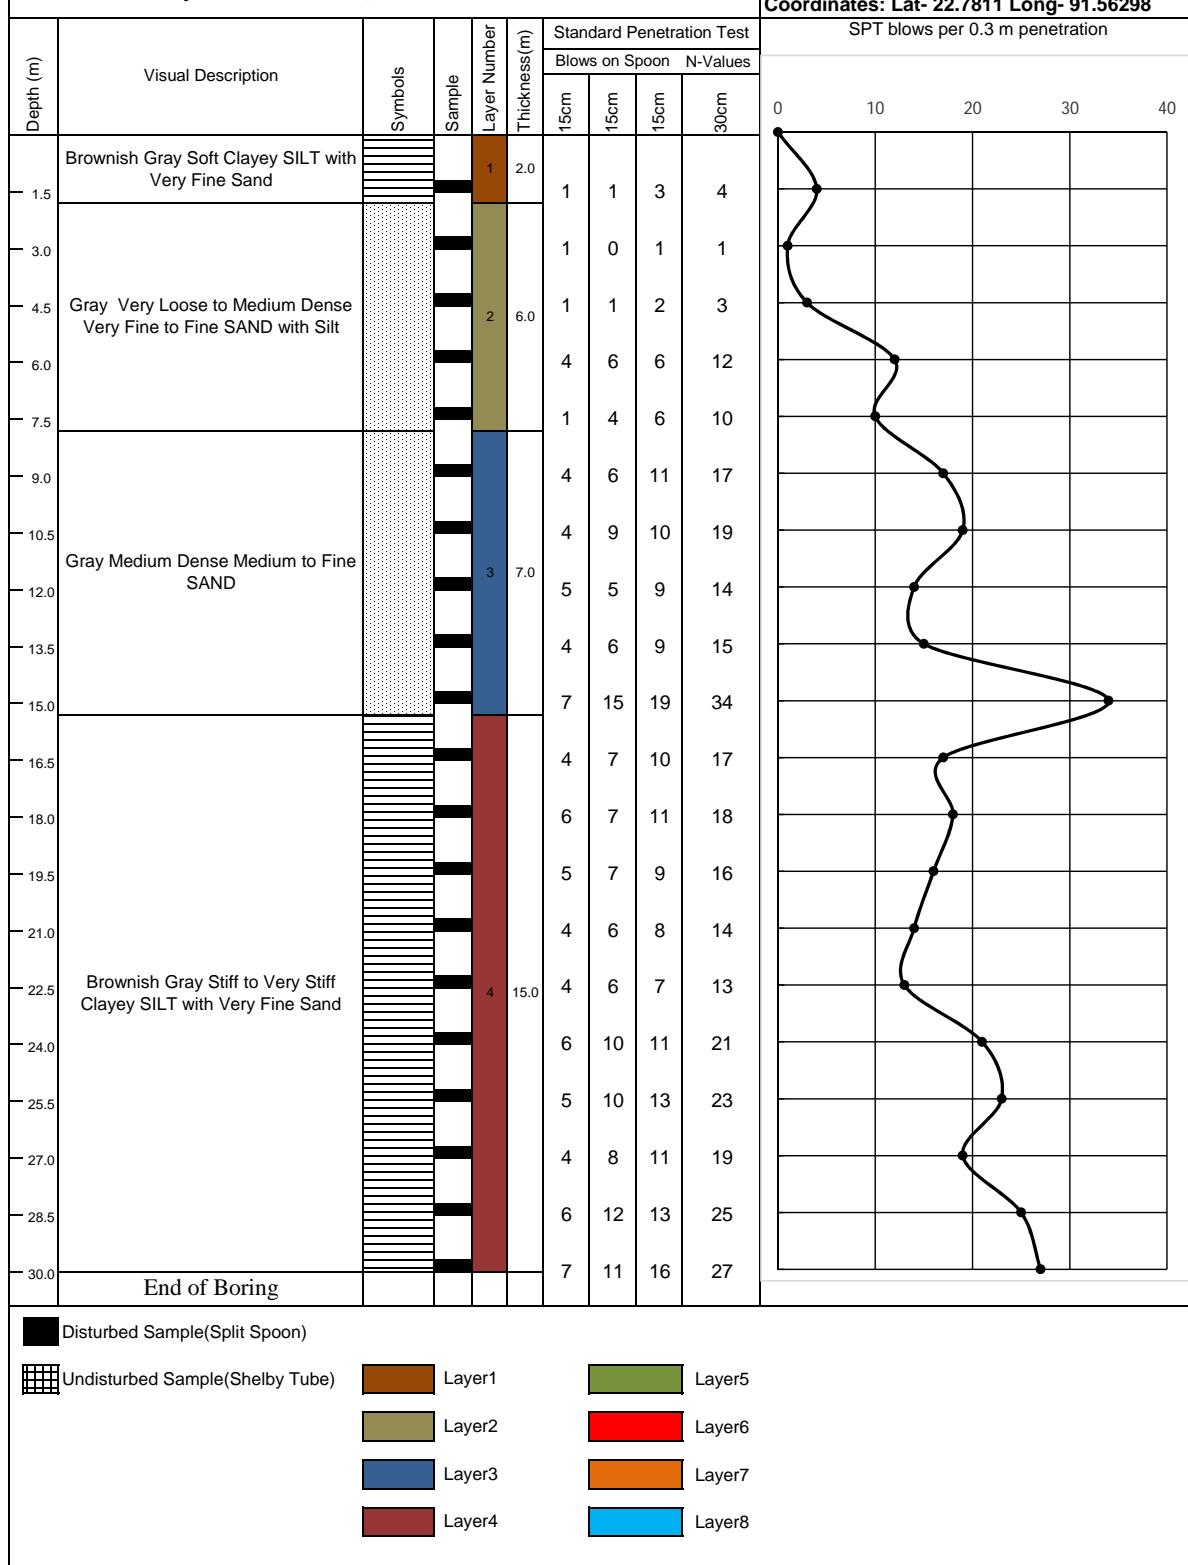



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M54

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 16.02.2018

Completed on: 16.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Rabiul Hossain Govt. Primary School

## Legend:




Clay

Silt

Sand

Coordinates: Lat- 22.78867 Long- 91.50636

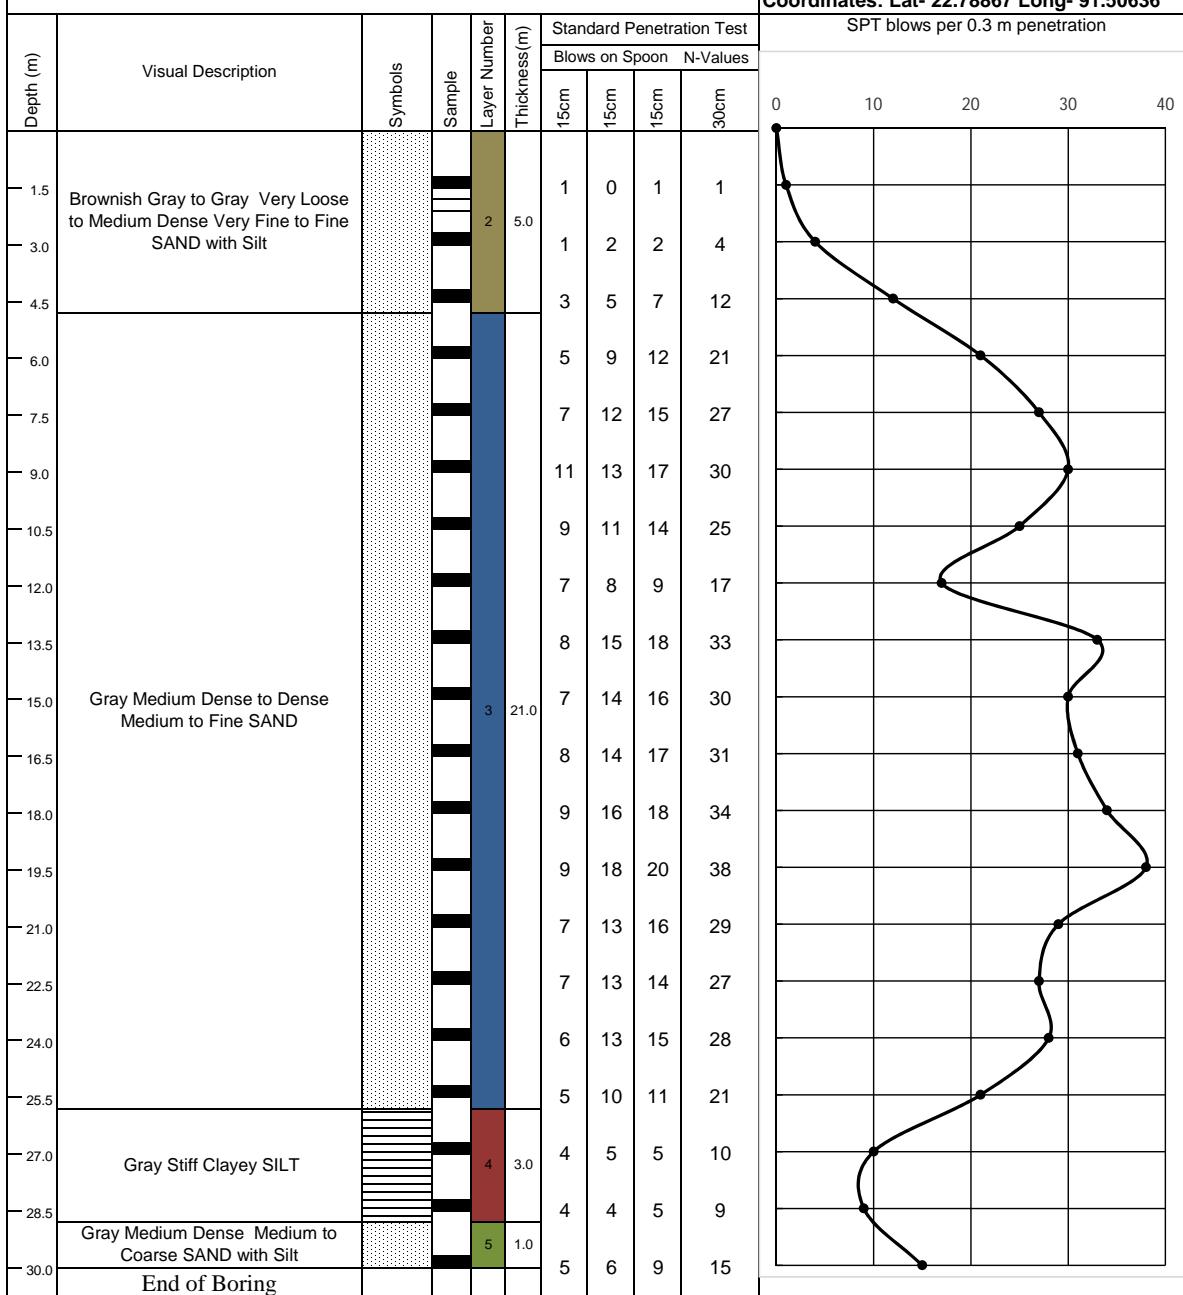

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M55

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 17.02.2018

Completed on: 17.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Chairman Bari, West Moliyash

## Legend:




Clay

Silt

Sand

Coordinates: Lat- 22.77471 Long- 91.51698

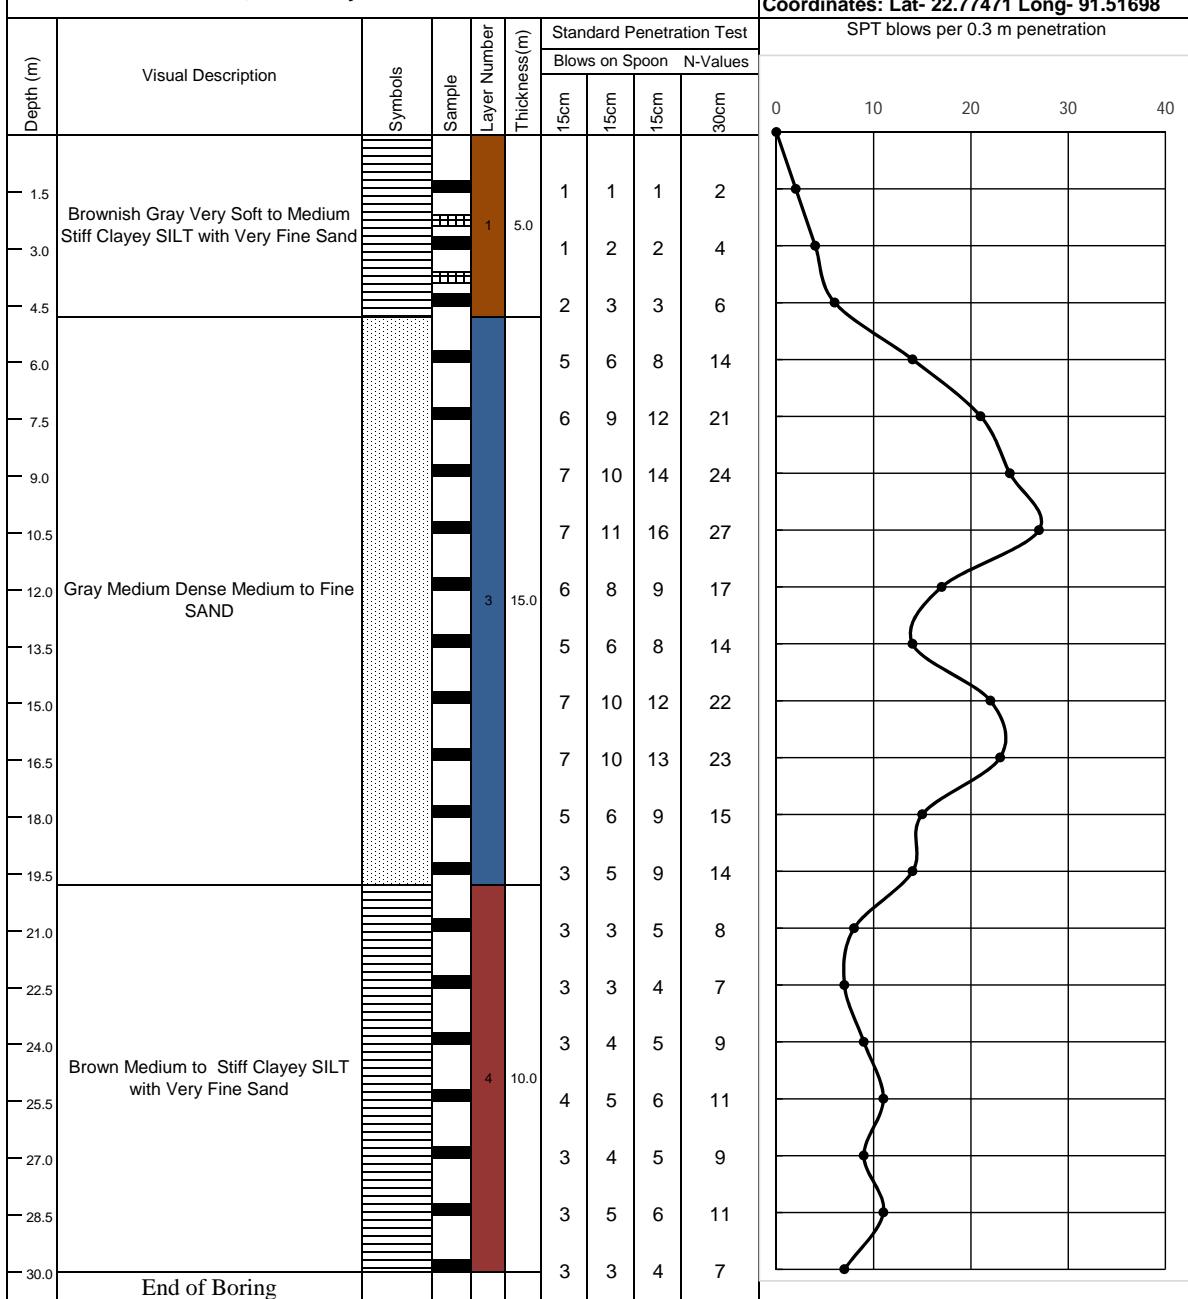

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M56

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 03.02.2018

Completed on: 03.02.2018

Client :Urban Development Directorate (UDD)  
Project : Mirsharai Upazilla Development Plan

Location : Hazi Badiul Alam Chowdhury Govt. Primary School, Mithanala

## Legend:




Clay

Silt

Sand

Coordinates: Lat- 22.78397 Long- 91.53249

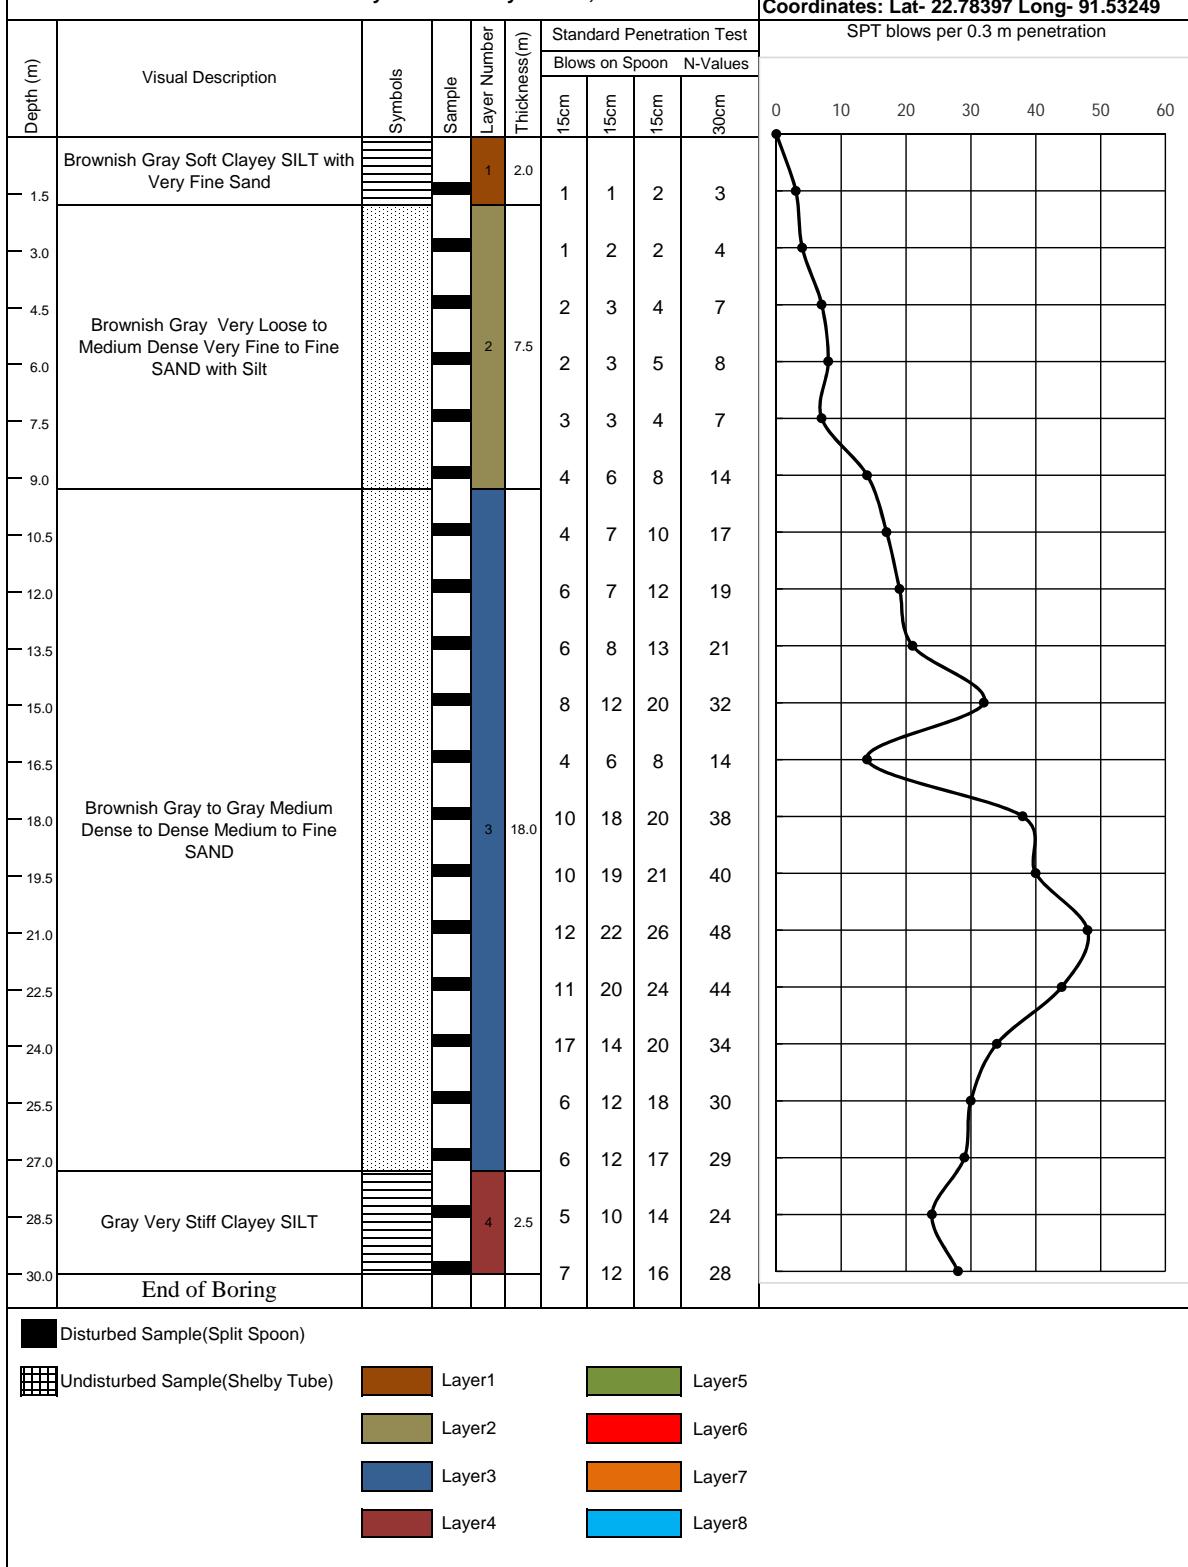



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M57

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 14.02.2018

Completed on: 14.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Mayani Bogla Kumar Primary School, Mayani

## Legend:



Clay

Silt

Sand

Coordinates: Lat- 22.73095 Long- 91.56573

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration						
						Blows on Spoon		N-Values								
						15cm	15cm	15cm	30cm	0	10	20	30	40	50	60
1.5	Brownish Gray Very Soft to soft Clayey SILT with Very Fine Sand			1	3.5	1	1	1	2							
3.0						1	2	2	4							
4.5	Gray Loose Very Fine to Fine SAND with Silt			2	4.5	2	2	3	5							
6.0						2	3	4	7							
7.5						5	8	12	20							
9.0						6	9	14	23							
10.5						5	8	13	21							
12.0						5	7	10	17							
13.5						6	8	12	20							
15.0	Gray Medium Dense Medium to Fine SAND			3	15.0	7	10	14	24							
16.5						8	12	15	27							
18.0						8	12	18	30							
19.5						7	10	13	23							
21.0						8	11	15	26							
22.5						2	4	7	11							
24.0	Gray Stiff Clayey SILT			4	3.0	3	4	5	9							
25.5						8	15	17	32							
27.0	Gray Dense Medium to Fine SAND			5	4.0	11	19	24	43							
28.5						16	28	22	50							
30.0	End of Boring															

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M58

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 06.02.2018

Completed on: 06.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : West Khoiachora Munipara, Jame Mosque

## Legend:



Clay

Silt

Sand

Coordinates: Lat- 22.758 Long- 91.57073

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon		N-Values			
						15cm	15cm	15cm	30cm		
1.5	Brownish Gray Very Soft to Soft Clayey SILT with Very Fine Sand			1	5.0	1	1	1	2		
3.0						1	1	2	3		
4.5						1	1	1	2		
6.0	Gray Very Loose Very Fine to Fine SAND with Silt			2	4.5	1	1	2	3		
7.5						1	1	1	2		
9.0						1	2	2	4		
10.5						3	5	6	11		
12.0						4	6	8	14		
13.5						4	7	9	16		
15.0						8	8	10	18		
16.5						7	10	13	23		
18.0						8	12	16	28		
19.5	Gray Medium Dense Medium to Fine SAND			3	20.5	6	9	12	21		
21.0						5	8	10	18		
22.5						7	12	15	27		
24.0						6	10	14	24		
25.5						7	11	15	26		
27.0						8	12	16	28		
28.5						5	7	10	17		
30.0	End of Boring					4	5	7	12		

 Disturbed Sample(Split Spoon) Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M59

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 16.02.2018


Completed on: 16.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : 3 Ghoriatola, Jame mosque, Maghadia

## Legend:




Clay

Silt

Sand

Coordinates: Lat- 22.76206 Long- 91.5293

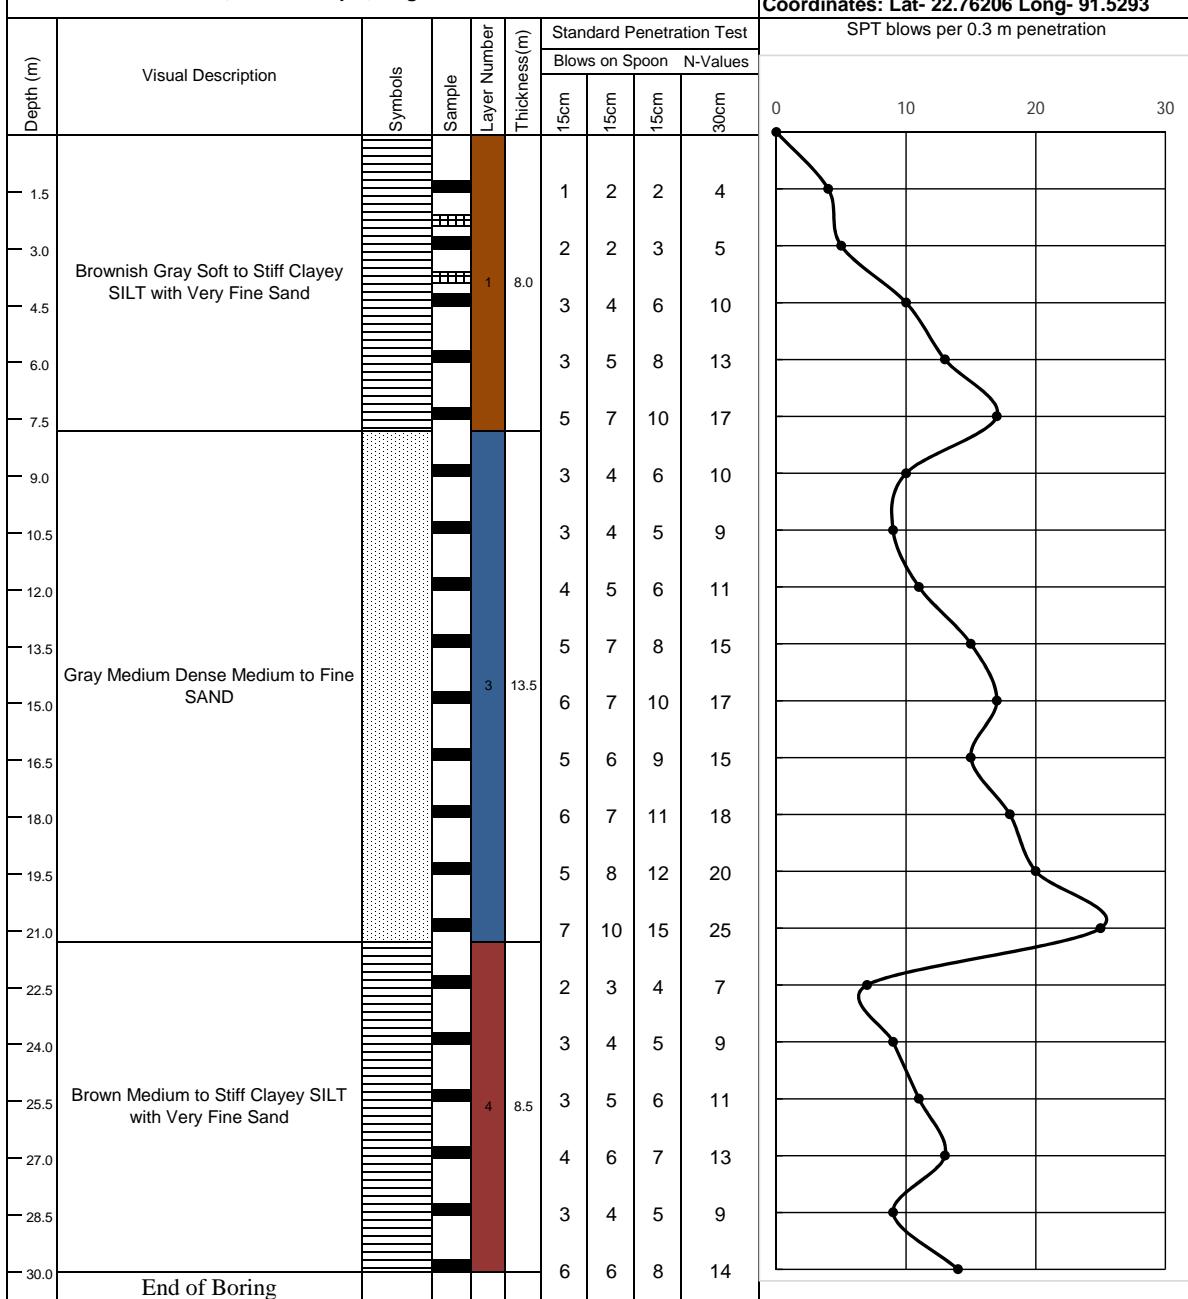

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M60

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 05.02.2018

Completed on: 05.02.2018

Client :Urban Development Directorate (UDD)  
Project : Mirsharai Upazilla Development Plan

Location : 90 no. Maghadia NC Govt. Primary School, Maghadia

## Legend:



Clay      Silt      Sand

Coordinates: Lat- 22.74951 Long- 91.53351

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon N-Values					
						15cm	15cm	15cm	30cm		
1.5	Brownish Gray Soft to Medium Stiff Clayey SILT with Very Fine Sand			1	5.0	2	2	4	6		
3.0						1	1	2	2	4	
4.5						1	1	2	3		
6.0	Gray Loose to Medium Dense Very Fine to Fine SAND with Silt			2	4.5	3	4	4	8		
7.5						2	4	5	9		
9.0						3	4	4	8		
10.5						3	4	6	10		
12.0						4	6	7	13		
13.5						4	7	10	17		
15.0	Gray Medium Dense Medium to Fine SAND			3	13.5	5	7	12	19		
16.5						5	8	13	21		
18.0						6	9	12	21		
19.5						4	7	10	17		
21.0						3	5	8	13		
22.5						4	5	7	12		
24.0						3	4	6	10		
25.5	Brownish to Gray Stiff to Very Stiff Clayey SILT with Very Fine Sand			4	7.0	3	4	5	9		
27.0						3	4	5	9		
28.5						3	5	6	11		
30.0	End of Boring					3	4	6	10		

■ Disturbed Sample(Split Spoon)

■■■■■ Undisturbed Sample(Shelby Tube)

<span style="background-color: #8B4513; color: white; padding: 2px 5px;">■</span> Layer1	<span style="background-color: #6B8E23; color: white; padding: 2px 5px;">■</span> Layer5
<span style="background-color: #8B8B45; color: black; padding: 2px 5px;">■■■■■</span> Layer2	<span style="background-color: #FF0000; color: white; padding: 2px 5px;">■</span> Layer6
<span style="background-color: #4682B4; color: white; padding: 2px 5px;">■</span> Layer3	<span style="background-color: #D2691E; color: white; padding: 2px 5px;">■</span> Layer7
<span style="background-color: #A52A2A; color: white; padding: 2px 5px;">■■■■■</span> Layer4	<span style="background-color: #00FFFF; color: black; padding: 2px 5px;">■</span> Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M61

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 04.02.2018

Completed on: 04.02.2018

Client :Urban Development Directorate (UDD)  
Project : Mirsharai Upazilla Development Plan

Location : Sheker Taluk, Middle Maghadia

Legend:  
  
  
  
 Clay      Silt      Sand  
 Coordinates: Lat- 22.76571 Long- 91.55742

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon N-Values					
						15cm	15cm	15cm	30cm		
1.5	Gray Very Soft Clayey SILT with Very Fine Sand			1	2.0	1	1	1	2		
3.0						1	1	1	2		
4.5						1	0	1	1		
6.0	Gray Loose to Medium Dense Very Fine to Fine SAND with Silt			2	9.0	1	1	1	2		
7.5						1	1	2	3		
9.0						3	4	6	10		
10.5						4	5	7	12		
12.0						4	6	8	14		
13.5	Gray Medium Dense Medium to Fine SAND			3	7.0	5	7	10	17		
15.0						4	8	10	18		
16.5						4	6	9	15		
18.0						3	4	6	10		
19.5						3	4	5	9		
21.0						5	6	8	14		
22.5	Gray Stiff to Very Stiff Clayey SILT with Very Fine Sand			4	10.5	6	8	10	18		
24.0						7	10	14	24		
25.5						6	10	13	23		
27.0						5	8	10	18		
28.5	Gray Dense Medium to Fine SAND			5	1.5	5	8	11	19		
30.0	End of Boring					8	10	20	30		

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M62

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 13.02.2018


Completed on: 13.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan


Location : Kazir Taluk Govt. Primary School, Maghadia

## Legend:



Clay      Silt      Sand

Coordinates: Lat- 22.73803 Long- 91.53299

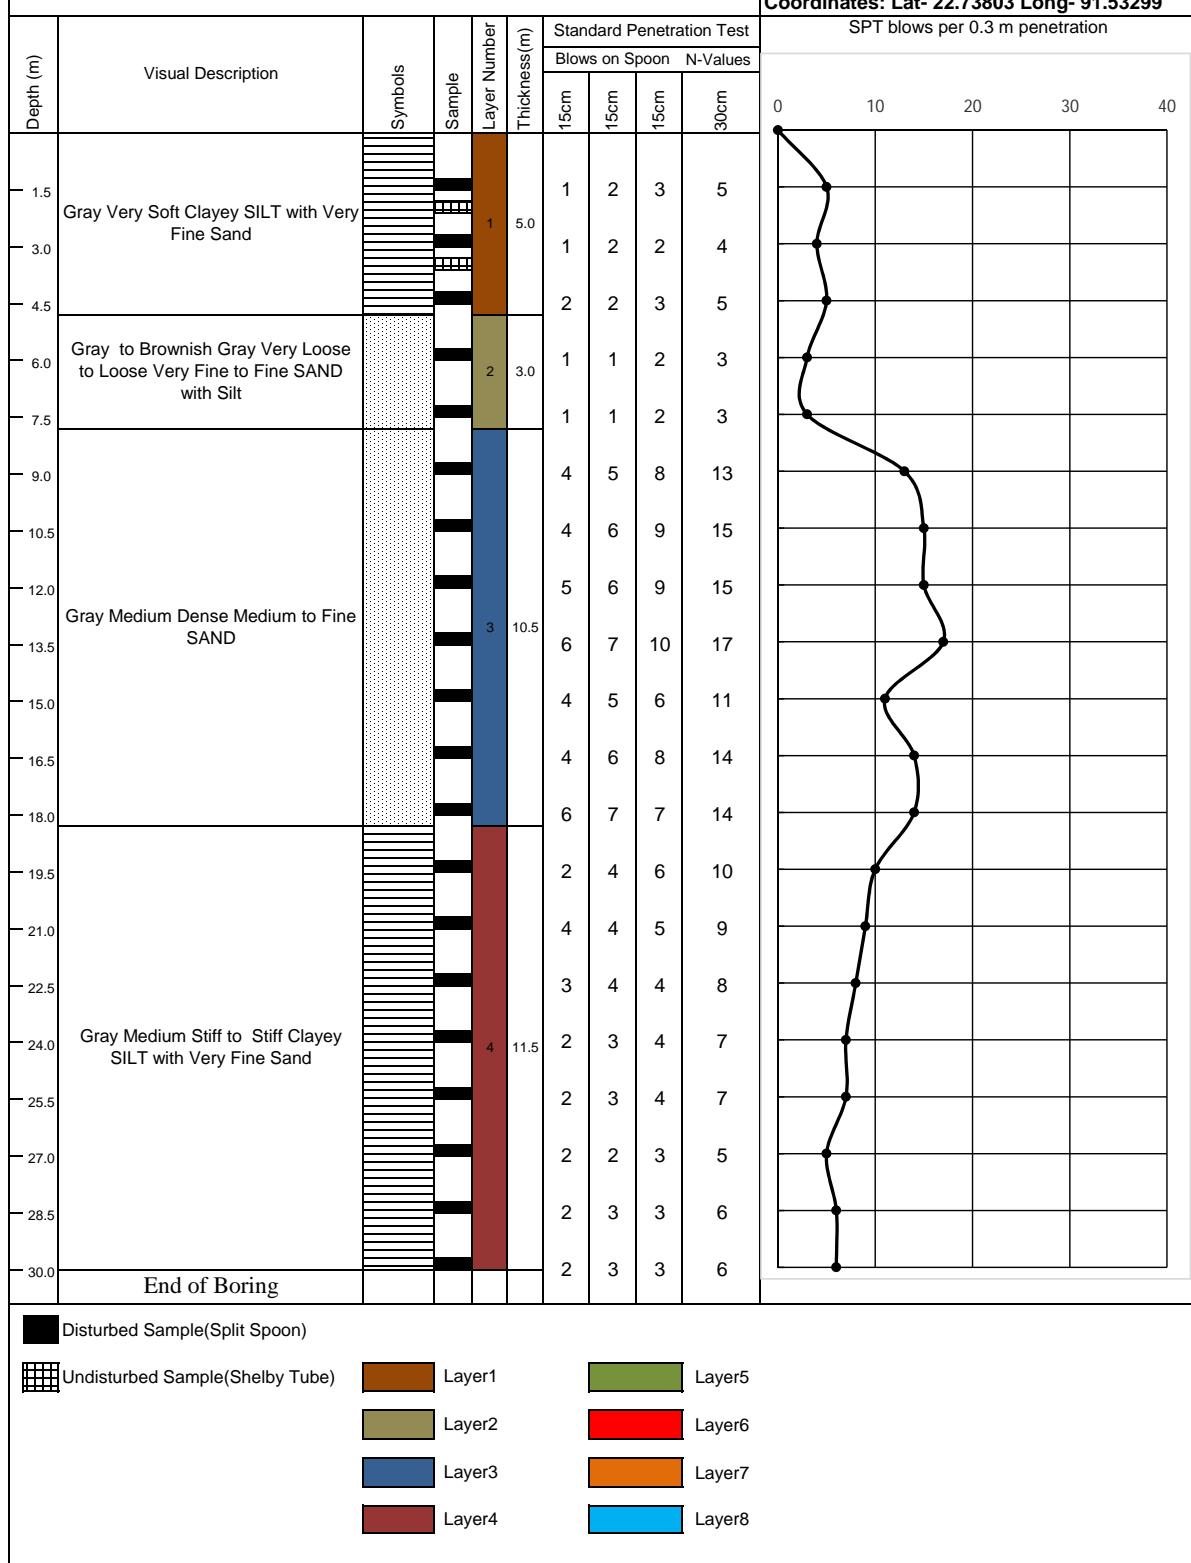



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M63

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 12.02.2018

Completed on: 12.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Komor ali Union High School, Komor Ali Union Bazar

## Legend:



Clay

Silt

Sand

Coordinates: Lat- 22.68562 Long- 91.58553

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration									
						Blows on Spoon		N-Values											
						15cm	15cm	15cm	30cm										
1.5						1	0	1	1										
3.0	Brownish Gray to Gray Very Soft to Soft Clayey SILT with Very Fine Sand			1	6.5	1	1	1	2										
4.5						1	1	1	2										
6.0						1	1	2	3										
7.5	Gray Very Loose Very Fine to Fine SAND with Silt			2	1.5	1	1	2	3										
9.0						4	7	9	16										
10.5						4	6	7	13										
12.0						4	6	9	15										
13.5	Gray Medium Dense Medium to Fine SAND			3	12.0	3	5	6	11										
15.0						3	4	7	11										
16.5						3	5	8	13										
18.0						4	5	7	12										
19.5						5	7	9	16										
21.0						2	2	2	4										
22.5	Gray Medium Stiff to Very Stiff Clayey SILT with Very Fine Sand			4	7.5	2	3	3	6										
24.0						3	4	5	9										
25.5						3	5	6	11										
27.0						5	8	13	21										
28.5	Gray Dense to Very Dense Fine SAND			5	2.5	8	14	16	30										
30.0	End of Boring					18	28	51	79										

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M64

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 13.02.2018

Completed on: 13.02.2018

Client :Urban Development Directorate (UDD)


Project : Mirsharai Upazilla Development Plan

Location : Katakhali Beribadh, Shekerkhali

**Legend:**

Clay      Silt      Sand

**Coordinates:** Lat- 22.72091 Long- 91.51587

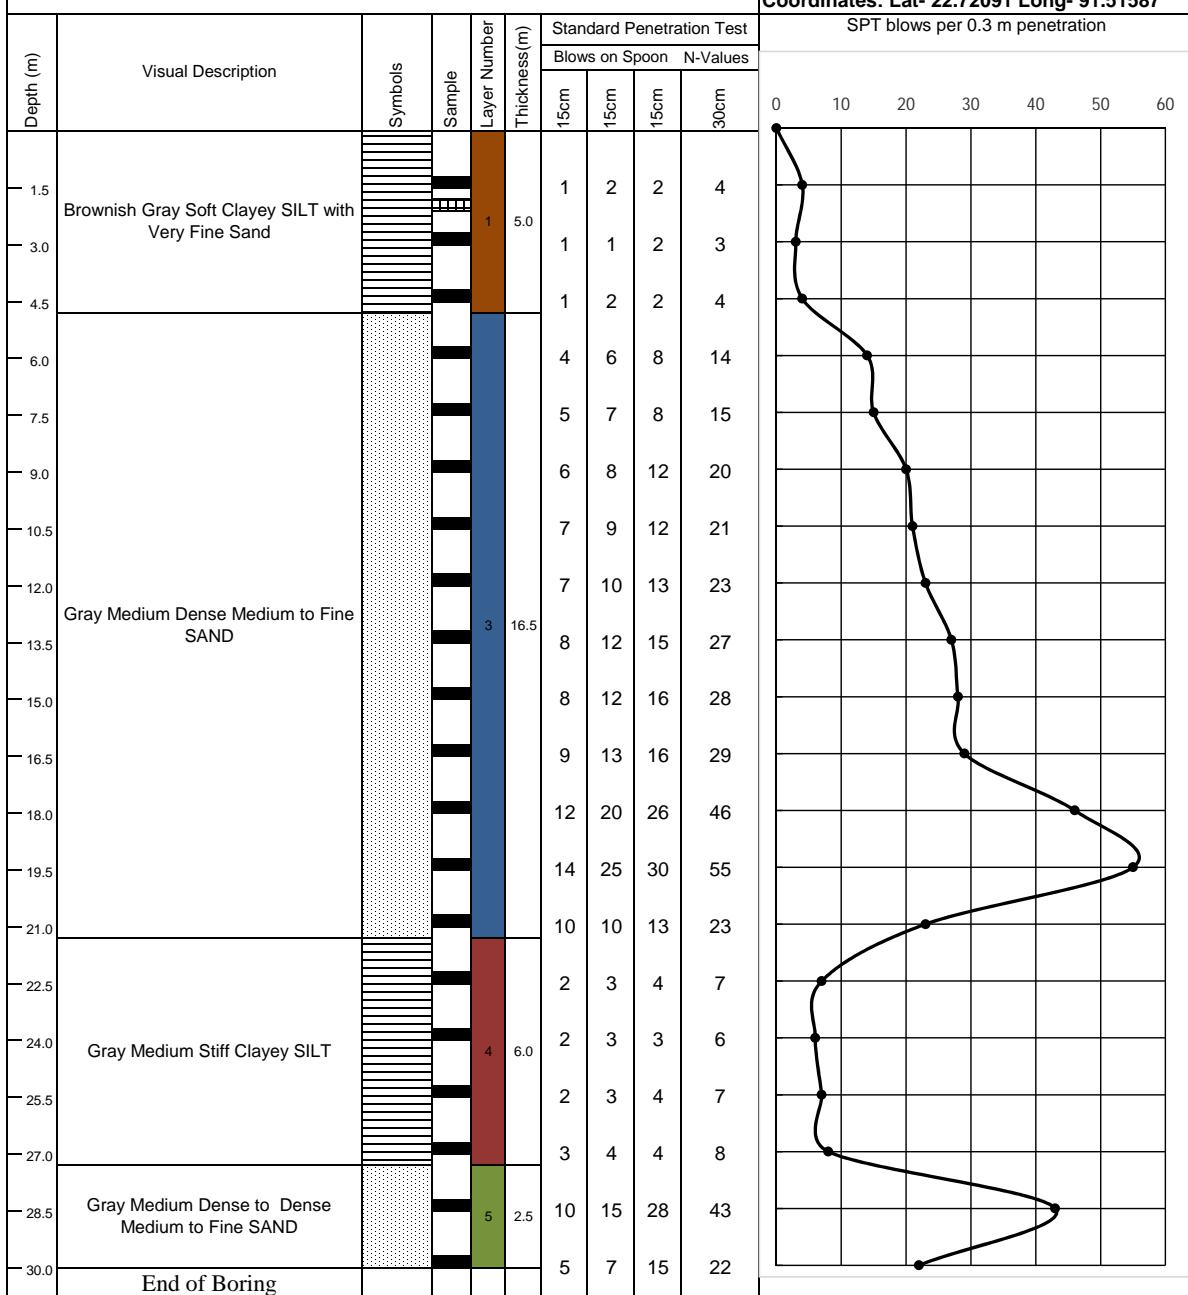

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M65

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 11.02.2018


Completed on: 12.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Baribadh, Shekerkhali

## Legend:



Clay

Silt

Sand

Coordinates: Lat- 22.71076 Long- 91.53028

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon		N-Values			
						15cm	15cm	15cm	30cm		
1.5						1	3	5	8		
3.0	Brownish gray to Gray Very Loose to Loose Very Fine to Fine SAND with Silt			2	8.0	2	3	3	6		
4.5						2	2	3	5		
6.0						1	1	2	3		
7.5						1	1	2	3		
9.0						2	4	7	11		
10.5						5	7	8	15		
12.0						8	10	13	23		
13.5						7	11	14	25		
15.0						6	9	10	19		
16.5	Gray Medium Dense Medium to Fine SAND			3	18.0	7	10	12	22		
18.0						7	12	14	26		
19.5						8	11	17	28		
21.0						6	8	11	19		
22.5						5	6	9	15		
24.0						6	9	14	23		
25.5						4	5	7	12		
27.0	Brown Medium Stiff to Stiff Clayey SILT with Very Fine Sand			4	4.0	2	3	4	7		
28.5						3	5	7	12		
30.0	End of Boring					3	4	7	11		

■ Disturbed Sample(Split Spoon)

■ Undisturbed Sample(Shelby Tube)

■ Layer1

■ Layer5

■ Layer2


■ Layer6

■ Layer3

■ Layer7

■ Layer4

■ Layer8

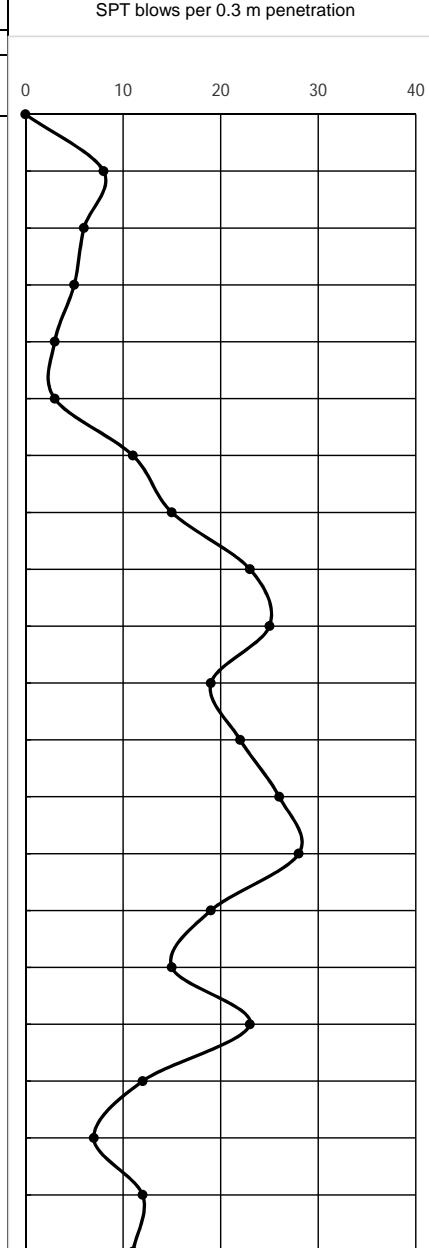



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M66

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 11.02.2018

Completed on: 11.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : North Dhoom Khali, Gazaria, Shekerkhali

## Legend:




Clay

Silt

Sand

Coordinates: Lat- 22.69645 Long- 91.54869

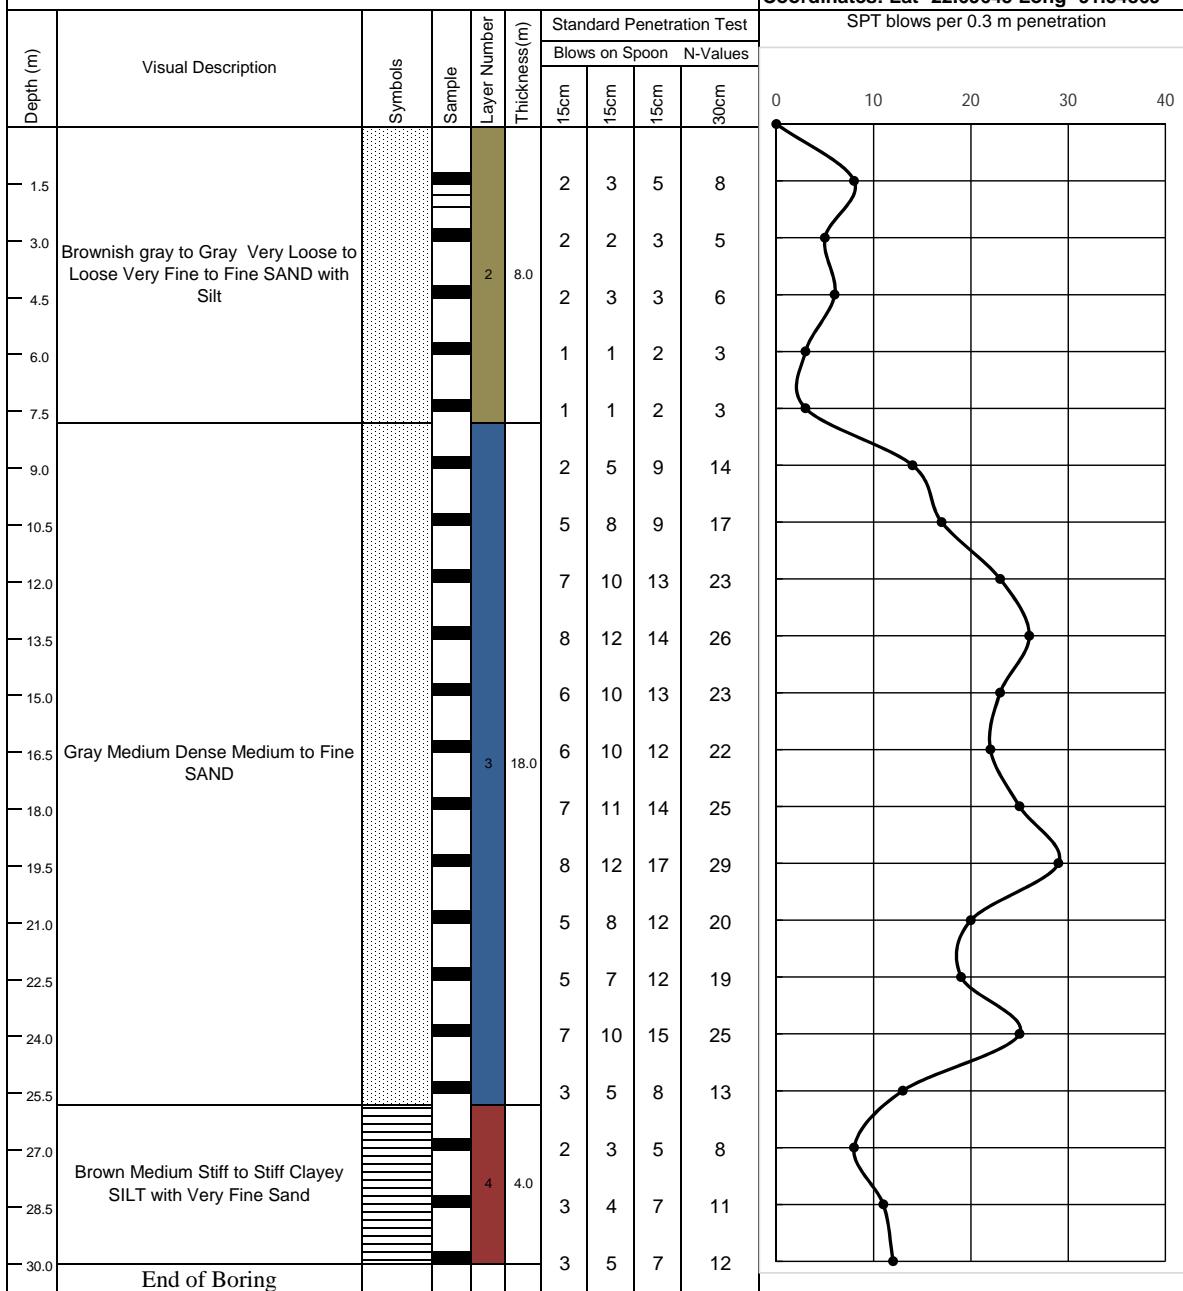

■ Disturbed Sample(Split Spoon)

■ Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M67

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 16.02.2018


Completed on: 17.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Ichakhali Khalpar, Ichakhali

## Legend:



Clay      Silt      Sand

Coordinates: Lat- 22.78336 Long- 91.48410

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon		N-Values			
						15cm	15cm	15cm	30cm		
1.5						1	2	3	5		
3.0	Brownish Gray Very Soft to Medium Stiff Clayey SILT with Very Fine Sand			1	8.0	1	1	2	3		
4.5						1	1	1	2		
6.0						1	1	1	2		
7.5						1	1	2	3		
9.0						3	5	8	13		
10.5						4	8	10	18		
12.0						5	7	12	19		
13.5						7	10	13	23		
15.0	Gray Medium Dense to Dense Medium to Fine SAND			3	15.0	8	12	15	27		
16.5						10	11	17	28		
18.0						8	11	16	27		
19.5						9	14	18	32		
21.0						11	17	19	36		
22.5						9	14	18	32		
24.0	Gray Medium Stiff Clayey SILT			4	4.5	2	3	3	6		
25.5						2	2	3	5		
27.0						2	3	5	8		
28.5	Gray Medium Dense Fine to Medium SAND with Silt			5	2.5	6	9	13	22		
30.0	End of Boring					7	10	14	24		

■ Disturbed Sample(Split Spoon)

■ Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M68

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 13.02.2018

Completed on: 13.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Shaherkhali High School, Shaherkhali

## Legend:



Coordinates: Lat- 22.71369 Long- 91.56564

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						15cm	15cm	15cm	30cm		
1.5					8.0	1	2	2	4		
3.0	Brownish Gray Very Soft to Soft Clayey SILT with Very Fine Sand			1	1	1	1	1	2		
4.5						1	1	1	2		
6.0						1	1	1	2		
7.5						1	2	2	4		
9.0	Gray Loose to Medium Dense Very Fine to Fine SAND with Silt			2	4.5	2	2	3	5		
10.5						3	5	6	11		
12.0						3	6	7	13		
13.5						4	8	8	16		
15.0						7	11	14	25		
16.5						6	10	12	22		
18.0						6	11	13	24		
19.5						5	10	13	23		
21.0	Gray Medium Dense Medium to Fine SAND			3	17.5	6	12	14	26		
22.5						5	11	12	23		
24.0						7	11	13	24		
25.5						6	12	14	26		
27.0						9	14	18	32		
28.5						5	8	9	17		
30.0	End of Boring					9	10	12	22		

■ Disturbed Sample(Split Spoon)

■ Undisturbed Sample(Shelby Tube)

■ Layer1

■ Layer5

■ Layer2

■ Layer6

■ Layer3

■ Layer7

■ Layer4

■ Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M69

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 12.02.2018

Completed on: 12.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Dhoomkhali, Shaherkhali

## Legend:



Clay      Silt      Sand

Coordinates: Lat- 22.69363 Long- 91.56484

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon N-Values					
						15cm	15cm	15cm	30cm		
1.5	Brownish Gray Soft to Very Soft Clayey SILT with Very Fine Sand			1	5.0	1	1	1	2		
3.0						1	1	2	3		
4.5						1	2	2	4		
6.0						3	5	8	13		
7.5						3	5	7	12		
9.0						4	6	8	14		
10.5						5	7	11	18		
12.0						7	10	14	24		
13.5	Gray Medium Dense Medium to Fine SAND			3	18.0	8	12	16	28		
15.0						8	13	17	30		
16.5						6	9	12	21		
18.0						5	8	13	21		
19.5						6	10	13	23		
21.0						7	11	13	24		
22.5						7	12	15	27		
24.0						2	3	3	6		
25.5	Gray Medium Stiff to Stiff Clayey SILT with Very Fine Sand			4	7.0	3	3	5	8		
27.0						4	4	6	10		
28.5						4	5	6	11		
30.0	End of Boring					5	6	7	13		

■ Disturbed Sample(Split Spoon)

■ Undisturbed Sample(Shelby Tube)

■ Layer1

■ Layer5

■ Layer2

■ Layer6

■ Layer3

■ Layer7

■ Layer4

■ Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M70 Method of Boring: Percussion Boring Dia.:100(mm) Boring Depth: 30.0m						Existing ground level: Ground water level: 4.00m below EGL Started on: 08.02.2018 Completed on: 08.02.2018																											
Client :Urban Development Directorate (UDD) Project : Mirsharai Upazilla Development Plan						Legend:  Clay Silt Sand																											
Location : West Gobania, Mirsharai						Coordinates: Lat- 22.76866 Long- 91.56601																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="3">Depth (m)</th> <th rowspan="3">Visual Description</th> <th rowspan="3">Symbols</th> <th rowspan="3">Sample</th> <th rowspan="3">Layer Number</th> <th rowspan="3">Thickness (m)</th> <th colspan="3">Standard Penetration Test</th> </tr> <tr> <th colspan="2">Blows on Spoon</th> <th>N-Values</th> </tr> <tr> <th>15cm</th> <th>15cm</th> <th>15cm</th> <th>30cm</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>									Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness (m)	Standard Penetration Test			Blows on Spoon		N-Values	15cm	15cm	15cm	30cm									
Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness (m)	Standard Penetration Test																											
						Blows on Spoon		N-Values																									
						15cm	15cm	15cm	30cm																								
1.5					6.5	1	1	1	2																								
3.0	Brownish Gray very Soft to Medium Stiff Clayey SILT with Very Fine Sand			1		2	2	3	5																								
4.5						2	2	2	4																								
6.0						2	3	3	6																								
7.5						3	5	7	12																								
9.0						5	7	11	18																								
10.5						6	10	12	22																								
12.0						7	12	15	27																								
13.5						9	15	16	31																								
15.0	Gray Medium Dense to Dense Medium to Fine SAND			3	16.5	14	18	23	41																								
16.5						13	17	21	38																								
18.0						13	18	24	42																								
19.5						14	20	25	45																								
21.0						12	17	21	38																								
22.5						10	14	16	30																								
24.0						6	8	10	18																								
25.5	Gray Stiff to Very Stiff Clayey SILT with Very Fine Sand			4	7.0	4	6	7	13																								
27.0						4	5	7	12																								
28.5						5	6	9	15																								
30.0	End of Boring					5	7	9	16																								


  |  |  |  |  |  |  |  || Legend:   - Disturbed Sample(Split Spoon) - Undisturbed Sample(Shelby Tube) - Layer1 - Layer2 - Layer3 - Layer4 - Layer5 - Layer6 - Layer7 - Layer8 |  |  |  |  |  |  |  |  |



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

<b>Bore hole No:</b> BH-M71 <b>Method of Boring:</b> Percussion <b>Boring Dia.:</b> 100(mm) <b>Boring Depth:</b> 30.0m						<b>Existing ground level:</b> <b>Ground water level:</b> 4.00m below EGL <b>Started on:</b> 08.02.2018 <b>Completed on:</b> 08.02.2018			
<b>Client :</b> Urban Development Directorate (UDD) <b>Project :</b> Mirsharai Upazilla Development Plan <b>Location :</b> Shonaichora, Khoiachora						<b>Legend:</b>    <b>Clay</b> <b>Silt</b> <b>Sand</b>			
<b>Coordinates:</b> Lat- 22.75824 Long- 91.60582						<b>SPT blows per 0.3 m penetration</b>			
Depth (m)	Visual Description	Symbol	Sample	Layer Number	Thickness(m)	Standard Penetration Test			
						Blows on Spoon	N-Values		
						15cm	15cm	15cm	
							30cm		
1.5	Brownish Gray Very Loose Fine SAND with Silt			2	5.0	1	1	1	2
3.0						1	1	1	2
4.5						1	1	2	3
6.0						16	22	26	48
7.5						13	19	22	41
9.0						12	26	24	50
10.5						50	50	0	50
12.0						50	50	0	50
13.5						50	50	0	50
15.0						50	50	0	50
16.5	Brownish Gray Dense to Very Dense Medium to Fine SAND			7	25.0	50	50	0	50
18.0						50	50	0	50
19.5						50	50	0	50
21.0						50	50	0	50
22.5						50	50	0	50
24.0						50	50	0	50
25.5						0	50	0	50
27.0						0	50	0	50
28.5						0	50	0	50
30.0	End of Boring					0	50	0	50
 <b>Disturbed Sample(Split Spoon)</b>									
			Layer1	Layer5					
			Layer2	Layer6					
			Layer3	Layer7					
			Layer4	Layer8					

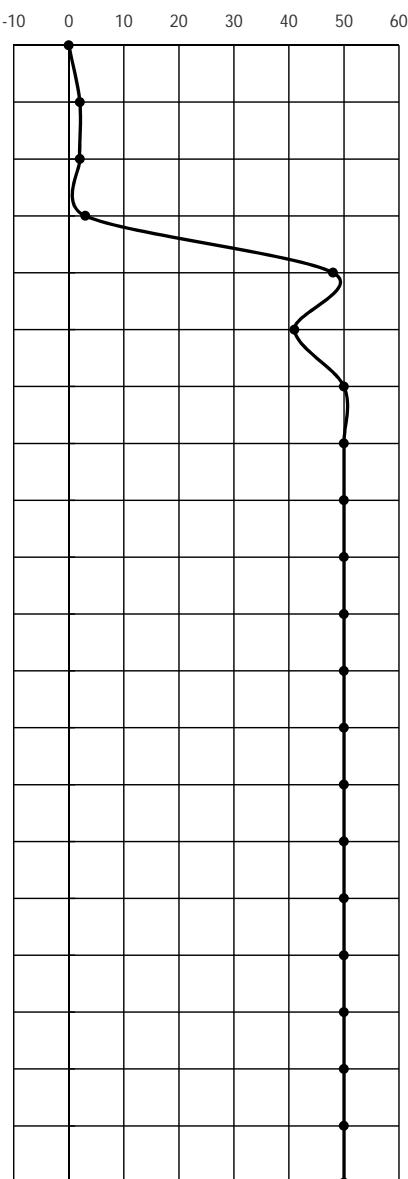



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M72

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 08.02.2018


Completed on: 08.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Morjida Masima Taluk, Borotakia

## Legend:



Clay

Silt

Sand

Coordinates: Lat- 22.74442 Long- 91.58926

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration	
						Blows on Spoon		N-Values			
						15cm	15cm	15cm	30cm		
1.5	Gray Very Loose to Medium Dense Very Fine to Fine SAND with Silt			2	5.0	1	1	2	3		
3.0						1	0	1	1		
4.5						1	1	2	3		
6.0						5	7	12	19		
7.5						4	6	8	14		
9.0						5	7	9	16		
10.5	Gray Medium Dense Medium to Fine SAND			3	12.0	5	8	11	19		
12.0						4	6	7	13		
13.5						4	5	6	11		
15.0						3	5	7	12		
16.5						2	4	7	11		
18.0						5	6	10	16		
19.5	Brown to Gray Stiff to Very Stiff Clayey SILT with Very Fine Sand			4	13.0	6	8	13	21		
21.0						7	9	10	19		
22.5						6	10	12	22		
24.0						7	12	14	26		
25.5						7	13	15	28		
27.0						6	8	11	19		
28.5						7	9	12	21		
30.0	End of Boring					5	7	10	17		

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8




# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M73 Method of Boring: Percussion Boring Dia.:100(mm) Boring Depth: 30.0m							Existing ground level: Ground water level: 4.00m below EGL Started on: 06.02.2018 Completed on: 06.02.2018		
Client :Urban Development Directorate (UDD) Project : Mirsharai Upazilla Development Plan Location : Khoiachora Waterfall Road, Khoiachora							Legend:  Clay  Silt  Sand Coordinates: Lat- 22.76957 Long- 91.59991		
Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test			
						Blows on Spoon	N-Values		
					15cm	15cm	15cm	30cm	
1.5					2	2	3	5	
3.0					1	1	1	2	
4.5					1	1	2	3	
6.0	Brownish Gray Very Soft to Medium Stiff Clayey SILT with Very Fine Sand		1	12.5	1	1	2	3	
7.5					1	1	1	2	
9.0					1	1	1	2	
10.5					1	1	1	2	
12.0					1	1	1	2	
13.5	Brownish Gray Dense Fine SAND		7	1.5	6	19	29	48	
15.0					50	50	0	50	
16.5					50	50	0	50	
18.0					50	50	0	50	
19.5					50	50	0	50	
21.0	Brownish Gray Very Hard CLAY/SHALE		8	16.0	50	50	0	50	
22.5					50	50	0	50	
24.0					50	50	0	50	
25.5					50	50	0	50	
27.0					50	50	0	50	
28.5					50	50	0	50	
30.0	End of Boring				50	50	0	50	

SPT blows per 0.3 m penetration

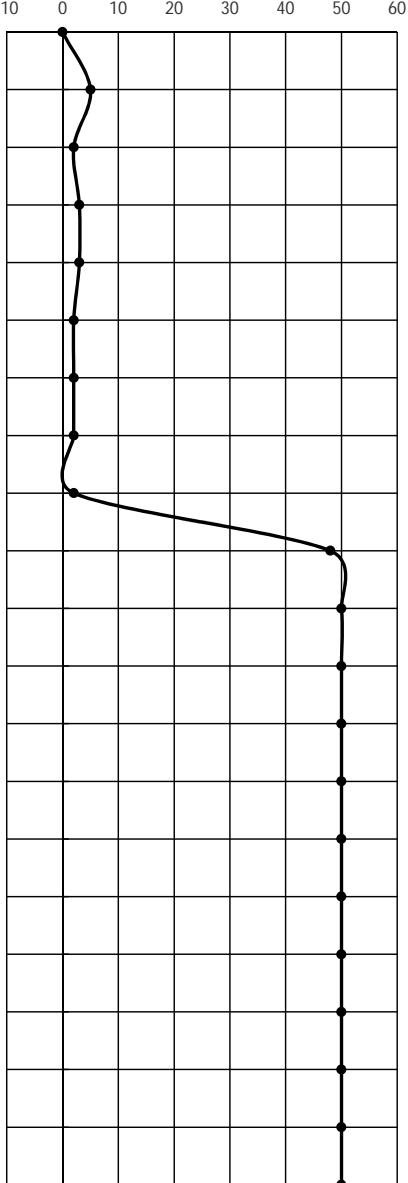

The graph plots SPT blow counts against depth. The x-axis represents depth in meters from 0 to 60, and the y-axis represents SPT blow counts from -10 to 60. The curve starts at approximately (0, 5), dips slightly, then rises sharply to a peak of about 48 blows at 13.5m, and then gradually declines to about 50 blows at 30.0m.

[Black Box] Disturbed Sample(Split Spoon)
[Grid Box] Undisturbed Sample(Shelby Tube)
[Brown Box] Layer1
[Light Green Box] Layer5
[Khaki Box] Layer2
[Red Box] Layer6
[Blue Box] Layer3
[Orange Box] Layer7
[Maroon Box] Layer4
[Light Blue Box] Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M74

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 06.02.2018

Completed on: 06.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Said Ali Govt. Primary School

## Legend:




Clay

Silt

Sand

Coordinates: Lat- 22.75439 Long- 91.57765

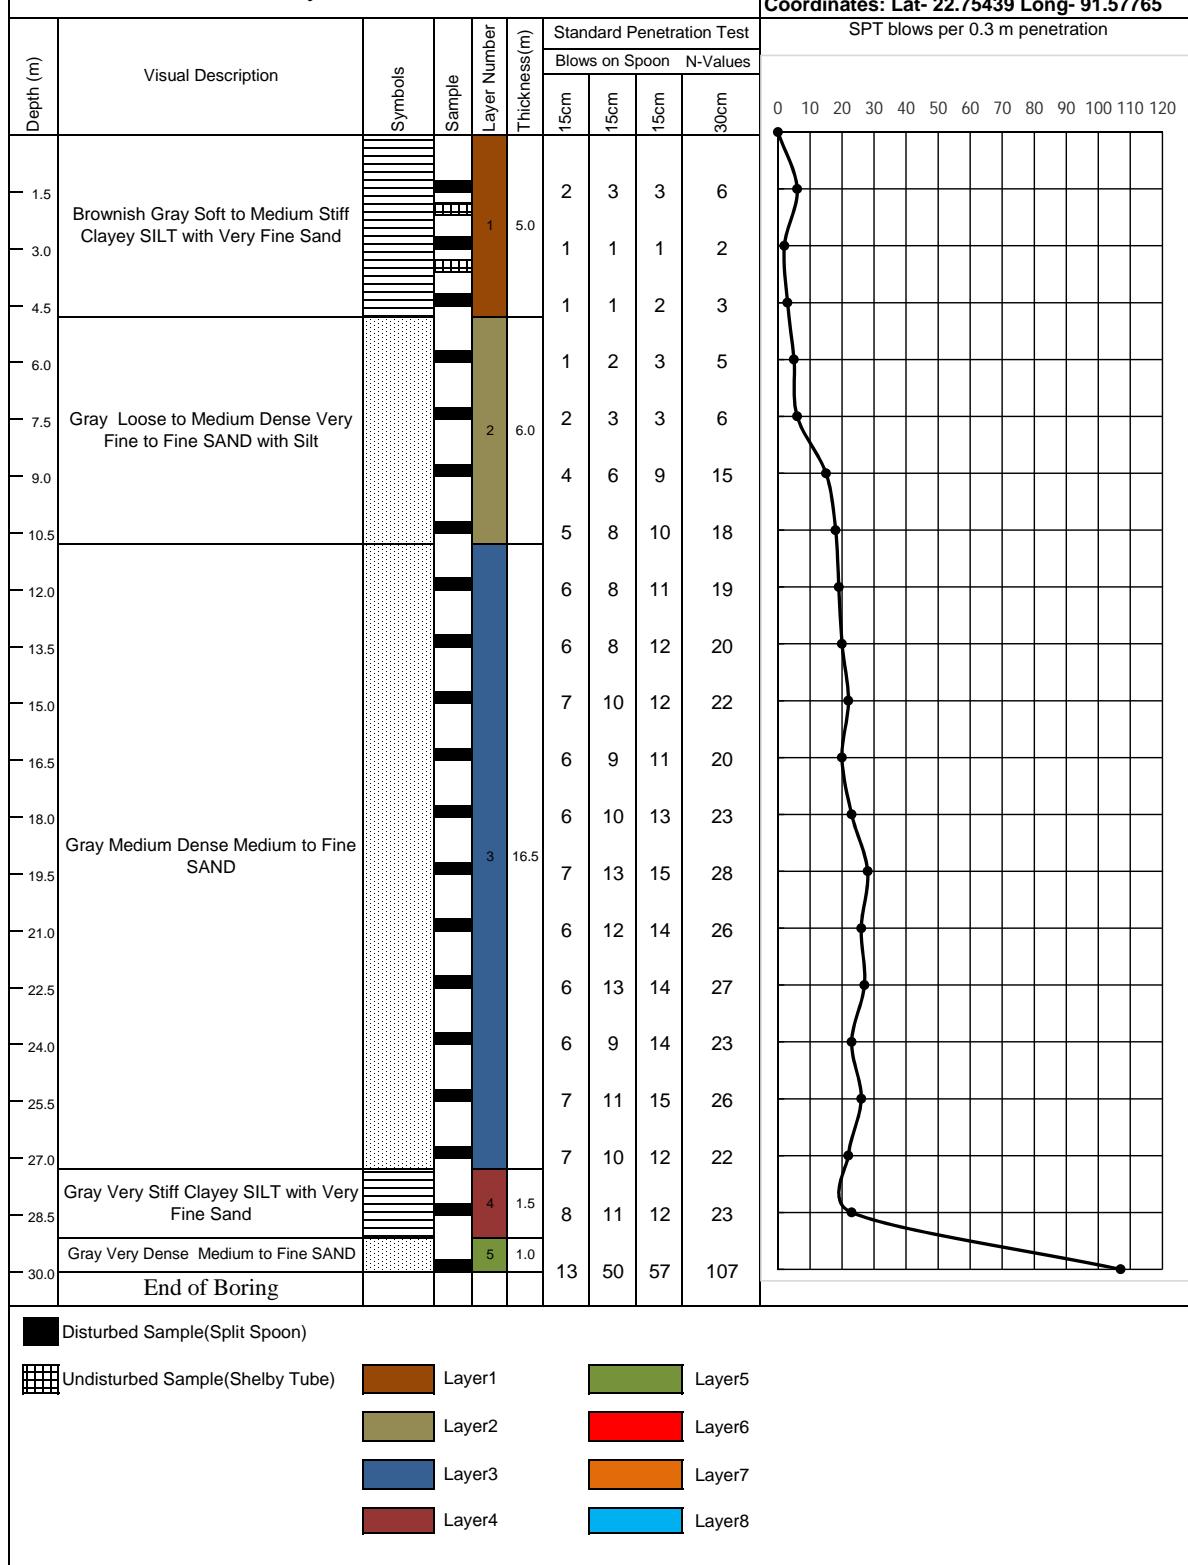



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M75

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 09.02.2018

Completed on: 09.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan


Location : Majeda Huq High School, Mayani

## Legend:



Clay      Silt      Sand

Coordinates: Lat- 22.72981 Long- 91.57939

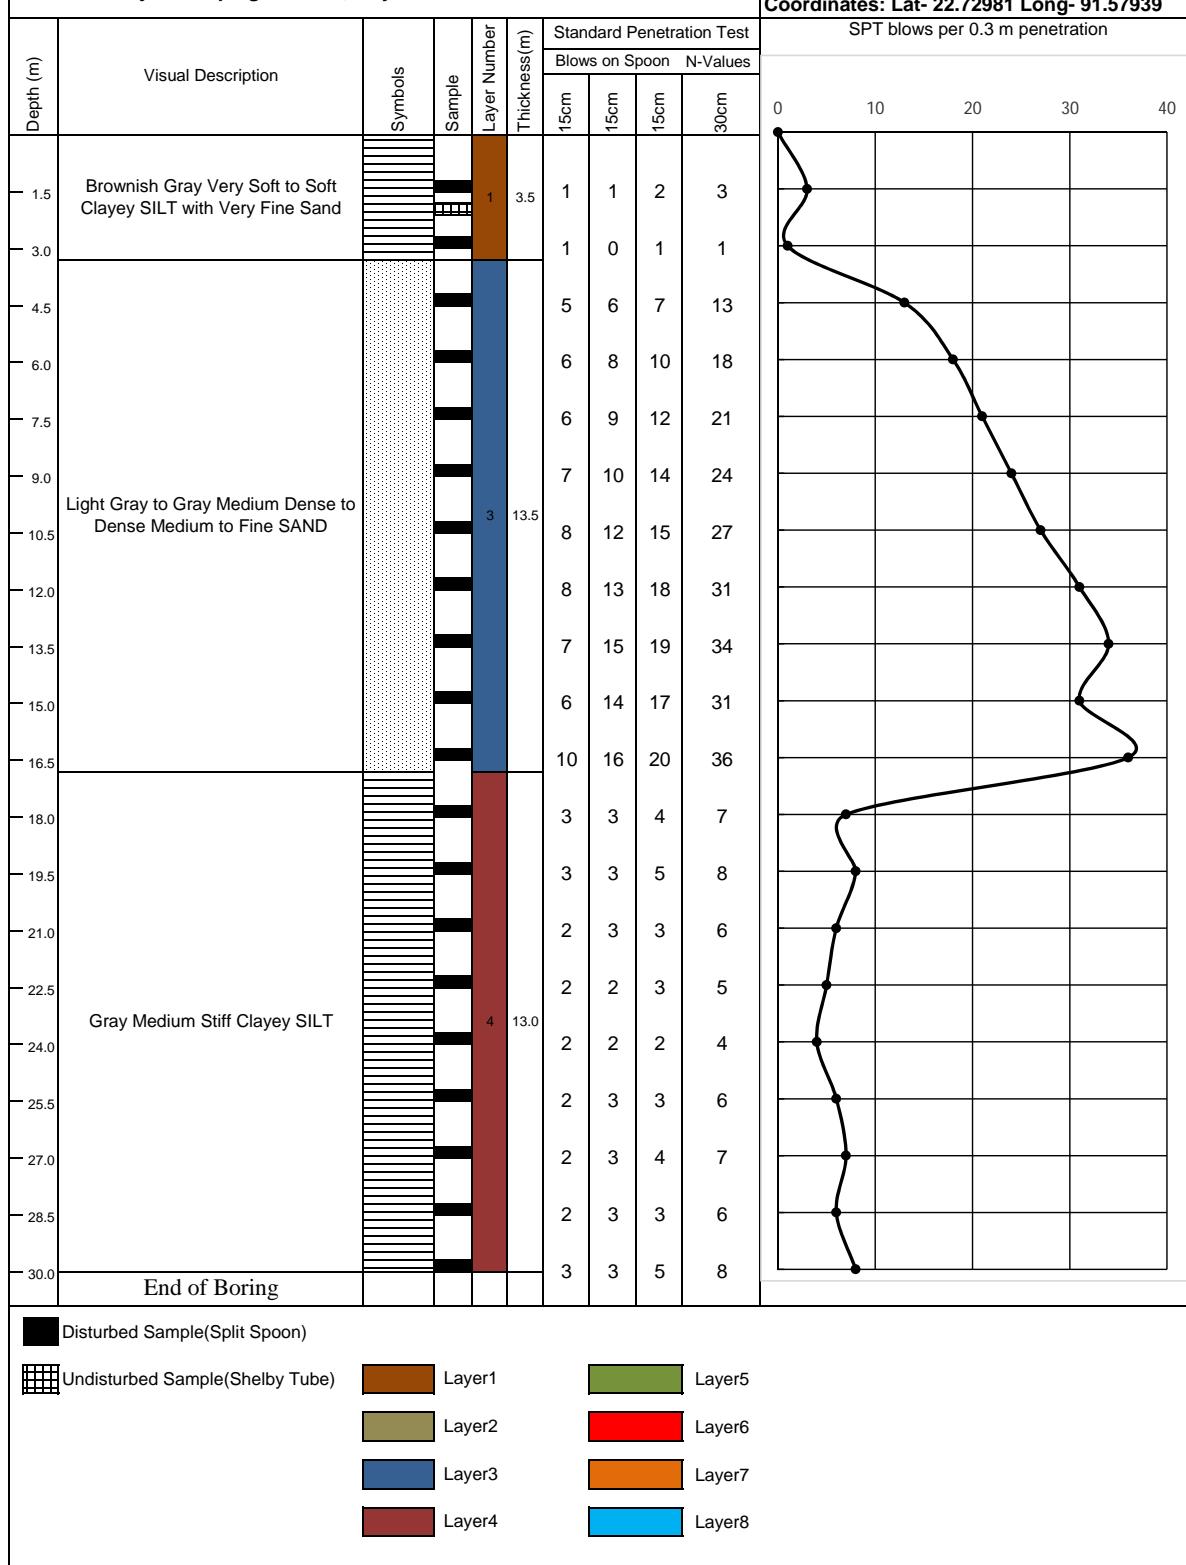



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M76

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 13.02.2018


Completed on: 13.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Shah Abdul Majid Govt. Primary School, West Mayani

## Legend:



Clay

Silt

Sand

Coordinates: Lat- 22.7176 Long- 91.54582

Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test				SPT blows per 0.3 m penetration				
						Blows on Spoon		N-Values						
						15cm	15cm	15cm	30cm					
1.5	Brownish Gray Very Soft to Soft Clayey SILT with Very Fine Sand			1	5.0	1	1	1	2	0	10	20	30	40
3.0						1	1	2	3					
4.5						1	1	1	2					
6.0	Gray Loose Very Fine to Fine SAND with Silt			2	3.0	2	2	4	6					
7.5						2	3	4	7					
9.0						5	7	11	18					
10.5						5	8	13	21					
12.0						7	10	15	25					
13.5	Gray Medium Dense Medium to Fine SAND			3	12.0	7	12	16	28					
15.0						7	13	18	31					
16.5						6	8	13	21					
18.0						7	10	13	23					
19.5						8	12	15	27					
21.0						3	5	6	11					
22.5						3	6	7	13					
24.0	Gray Medium Stiff to Stiff Clayey SILT with Very Fine Sand			4	10.0	3	4	5	9					
25.5						3	3	4	7					
27.0						2	3	3	6					
28.5						2	3	5	8					
30.0	End of Boring					3	4	6	10					

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M77

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 14.02.2018

Completed on: 14.02.2018

Client :Urban Development Directorate (UDD)  
Project : Mirsharai Upazilla Development Plan

Location : West Mayani Shahid Kamal Uddin Govt. Primary School

## Legend:




Clay

Silt

Sand

Coordinates: Lat- 22.73242 Long- 91.54217

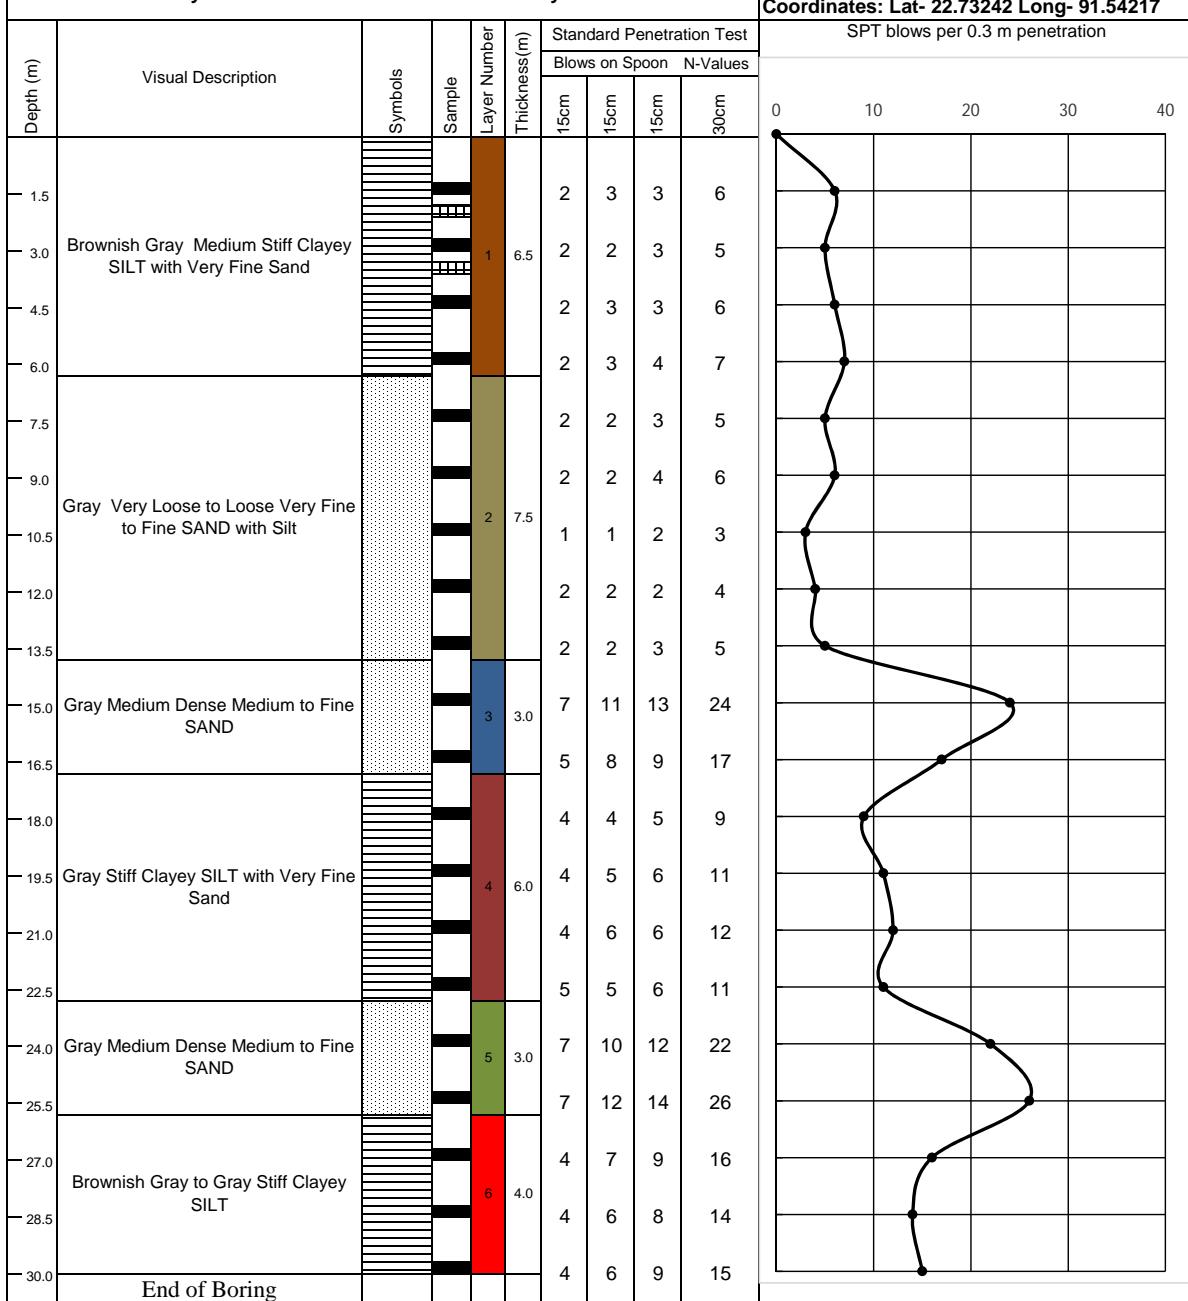

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M78

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : 13 no. Mayani Union Complex Building


Existing ground level:

Ground water level: 4.00m below EGL


Started on: 06.02.2018

Completed on: 06.02.2018

## Legend:



Coordinates: Lat- 22.7457 Long- 91.55657

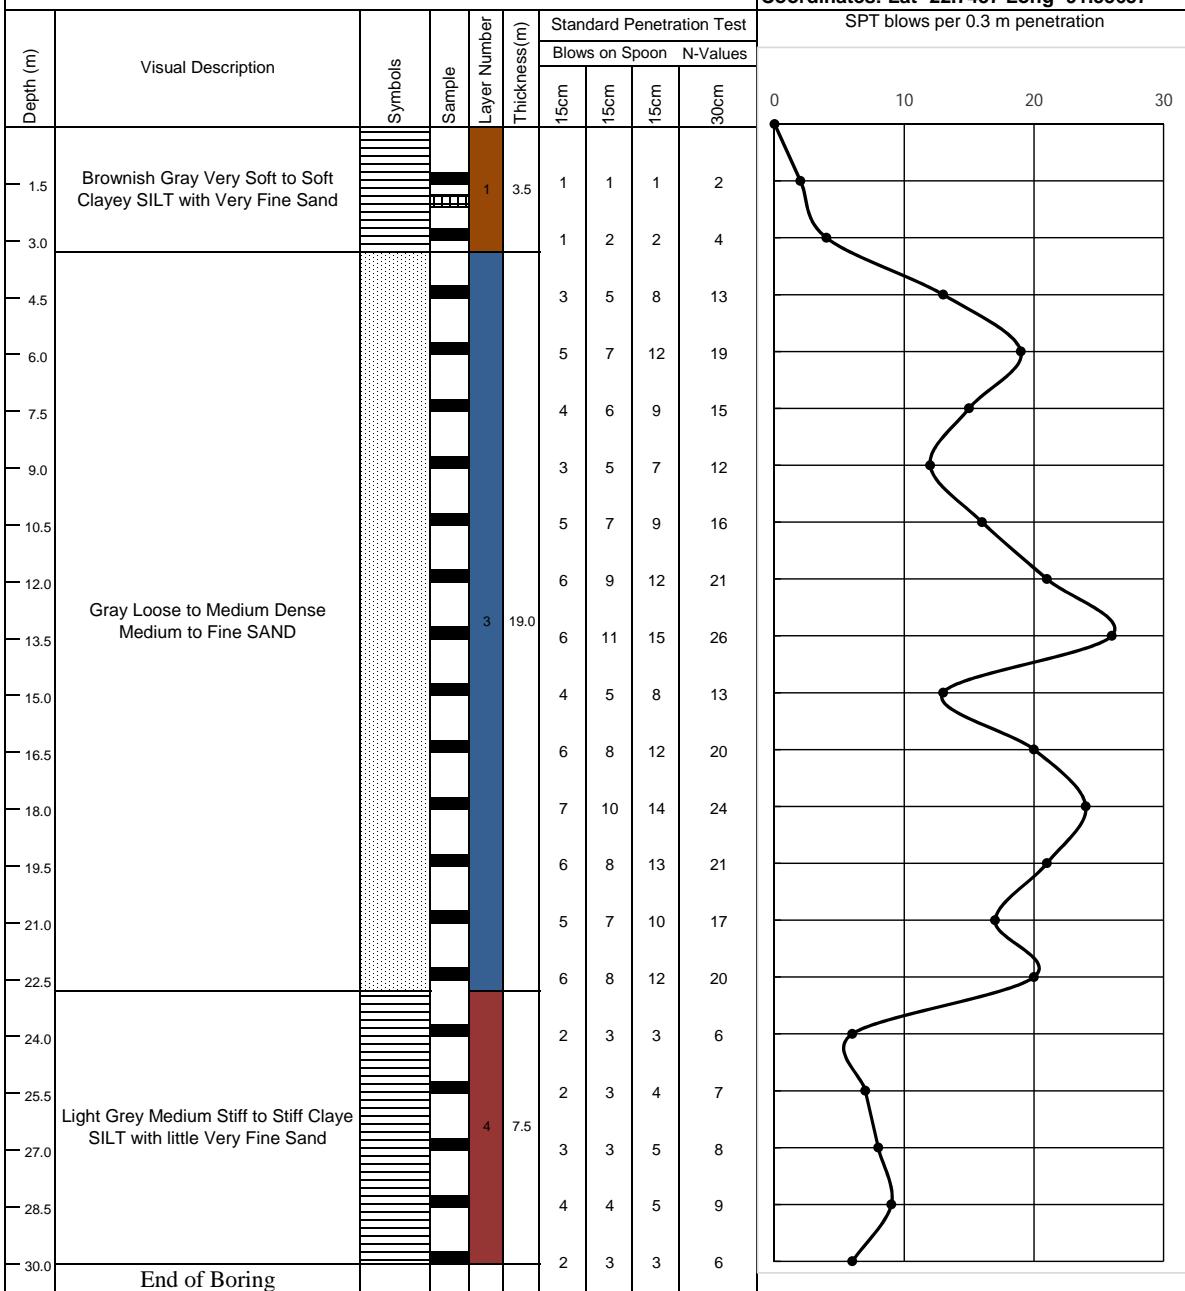

■ Disturbed Sample(Split Spoon)

■ Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M79

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 11.02.2018


Completed on: 11.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : West Wahedpur Molla para Mosque

## Legend:




Clay

Silt

Sand

Coordinates: Lat- 22.7002 Long- 91.62035

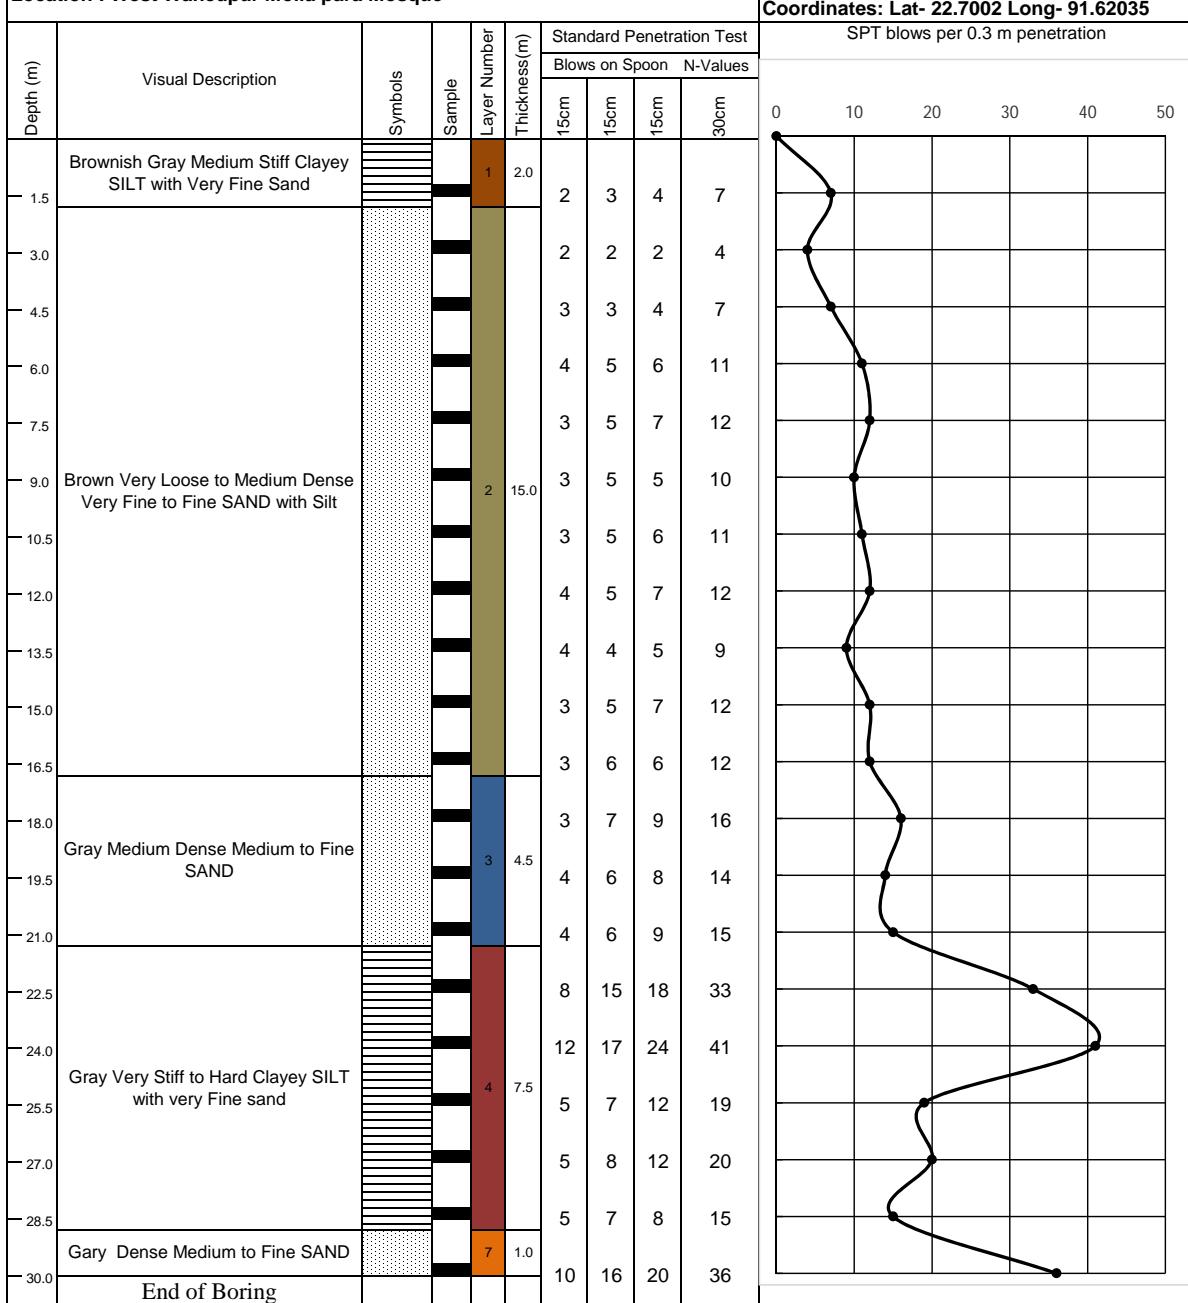

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M80

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 09.02.2018

Completed on: 09.02.2018


Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Beltola, Wahedpur

**Legend:**  
  
**Clay**        
**Silt**        
**Sand**

Coordinates: Lat- 22.74 Long- 91.604

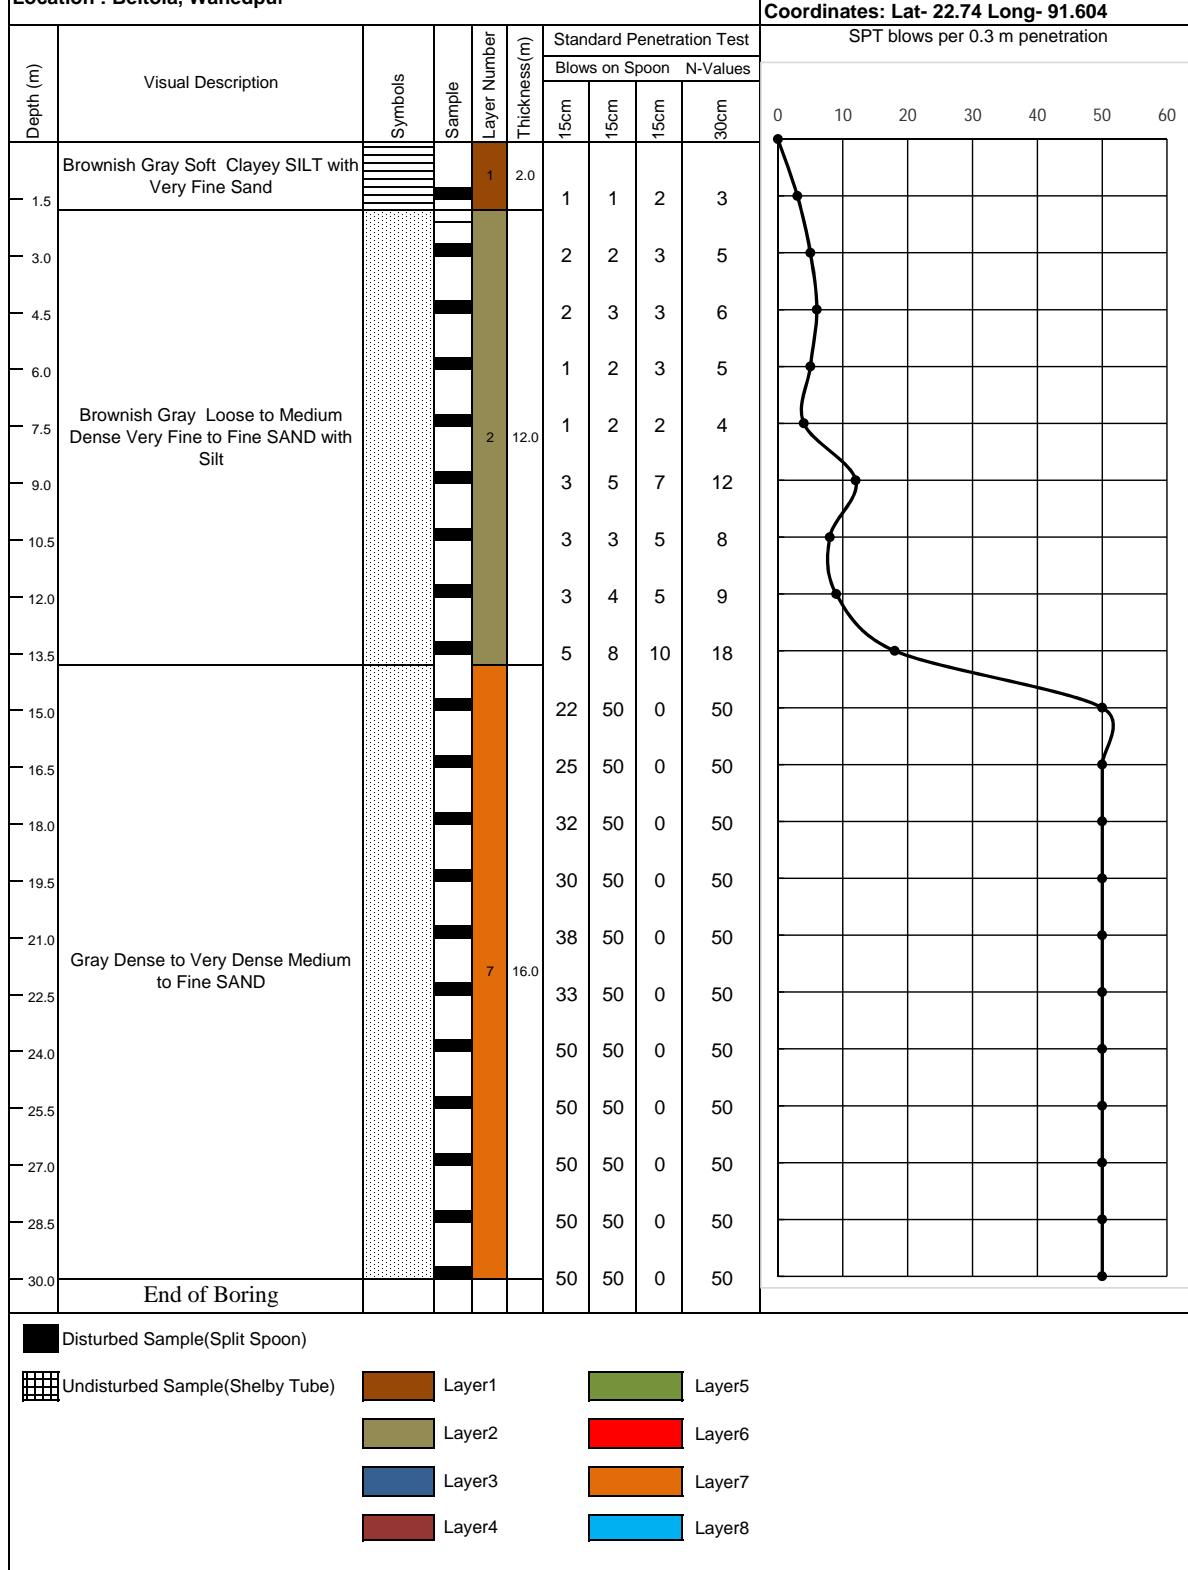



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M81

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL



Started on: 10.02.2018

Completed on: 10.02.2018

**Client** :Urban Development Directorate (UDD)  
**Project** : Mirsharai Upazilla Development Plan

Location : Sheker Taluk, Middle Maghadia

**Legend:**  
  
  
  
**Coordinates:** Lat- 22.71732 Long- 91.61549

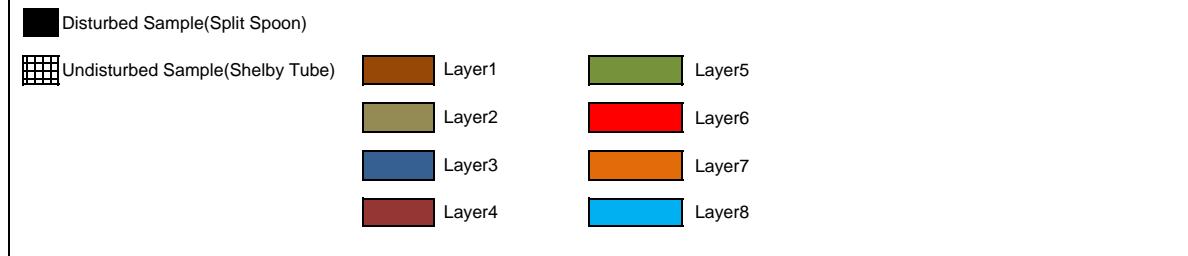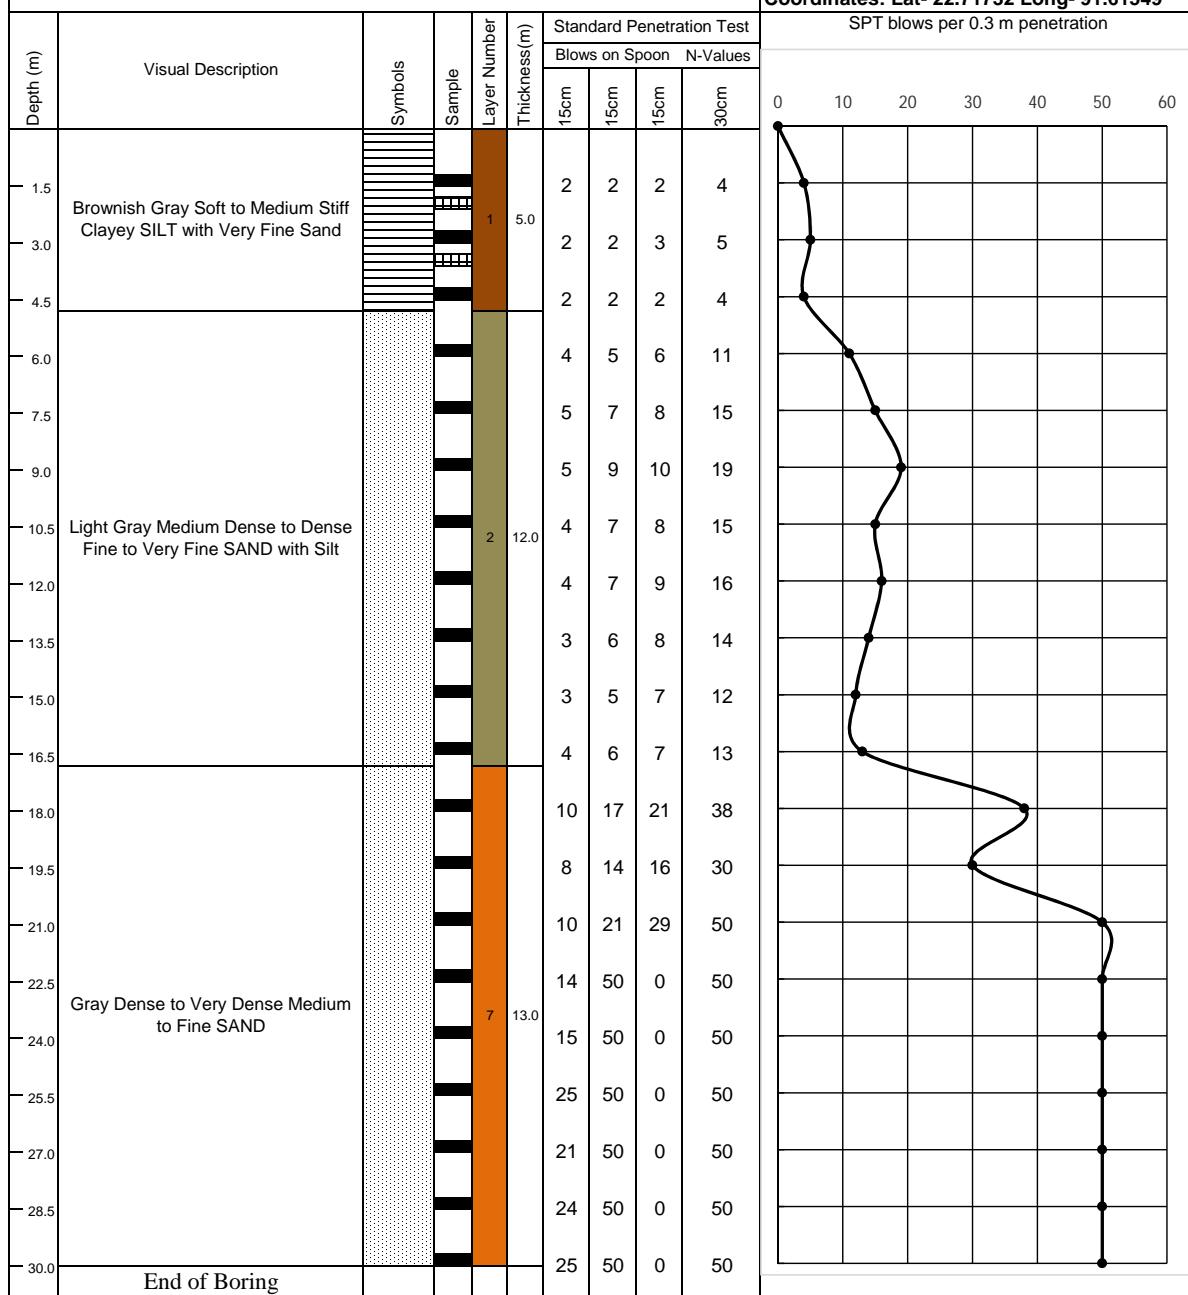



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M82

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 11.02.2018

Completed on: 11.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Maizgaon, Wahedpur, Mirsharai

## Legend:




Clay

Silt

Sand

Coordinates: Lat- 22.70669 Long- 91.6047

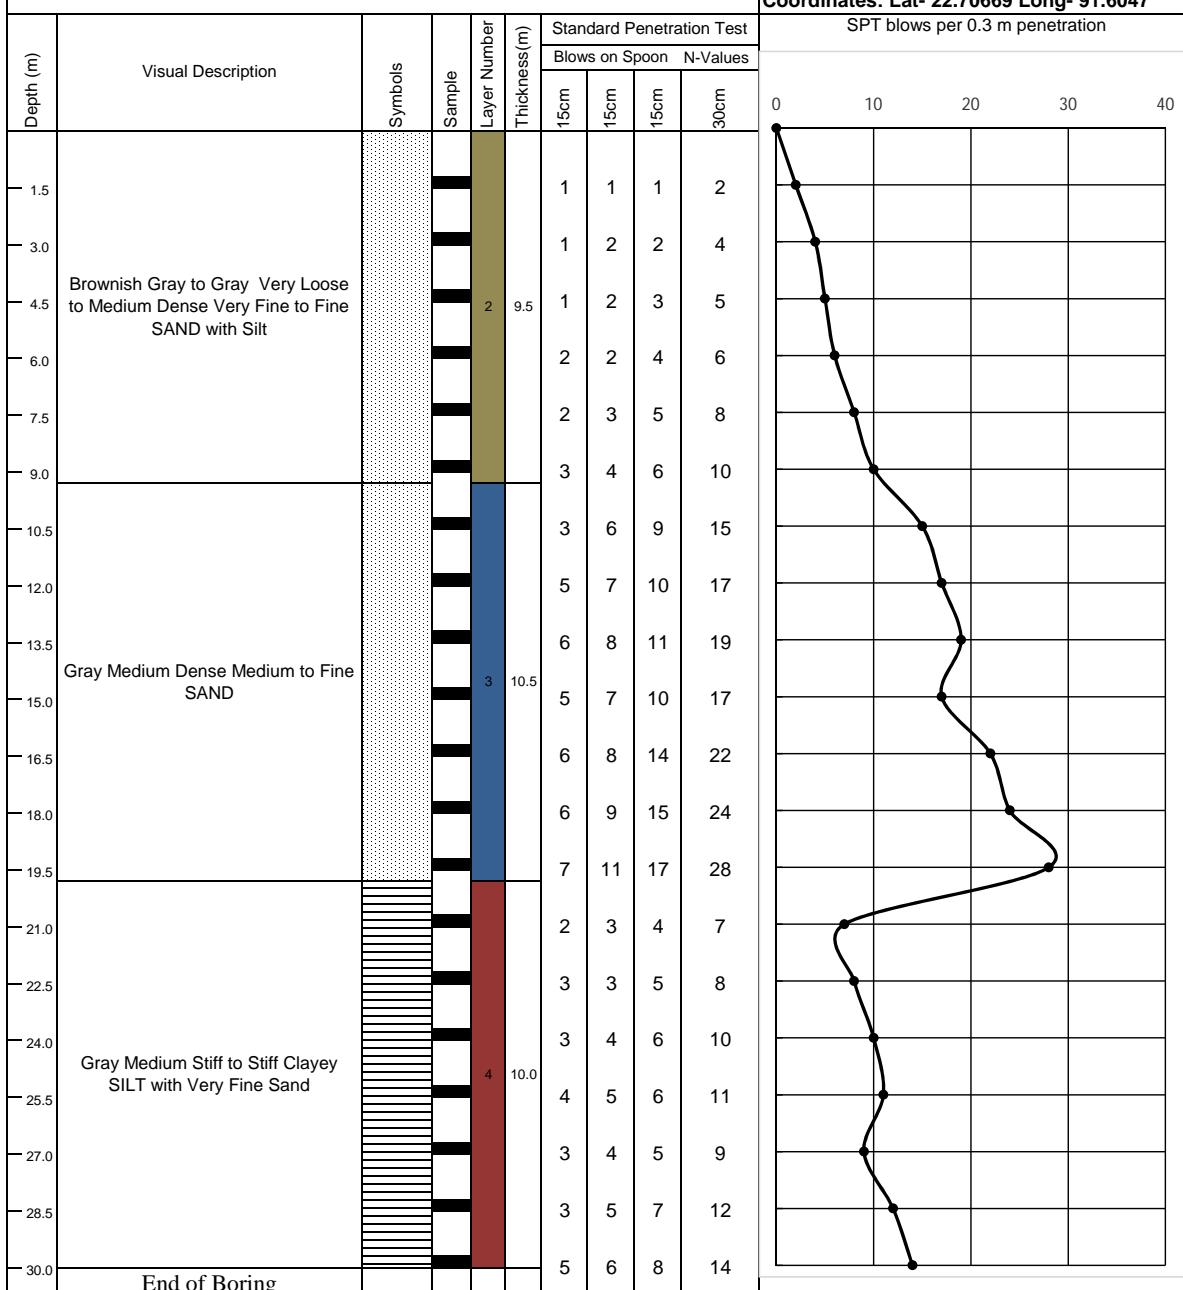

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M83

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 10.02.2018


Completed on: 10.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Jafrabad Govt. Primary School, Wahedpur

## Legend:




Clay

Silt

Sand

Coordinates: Lat- 22.68304 Long- 91.62183

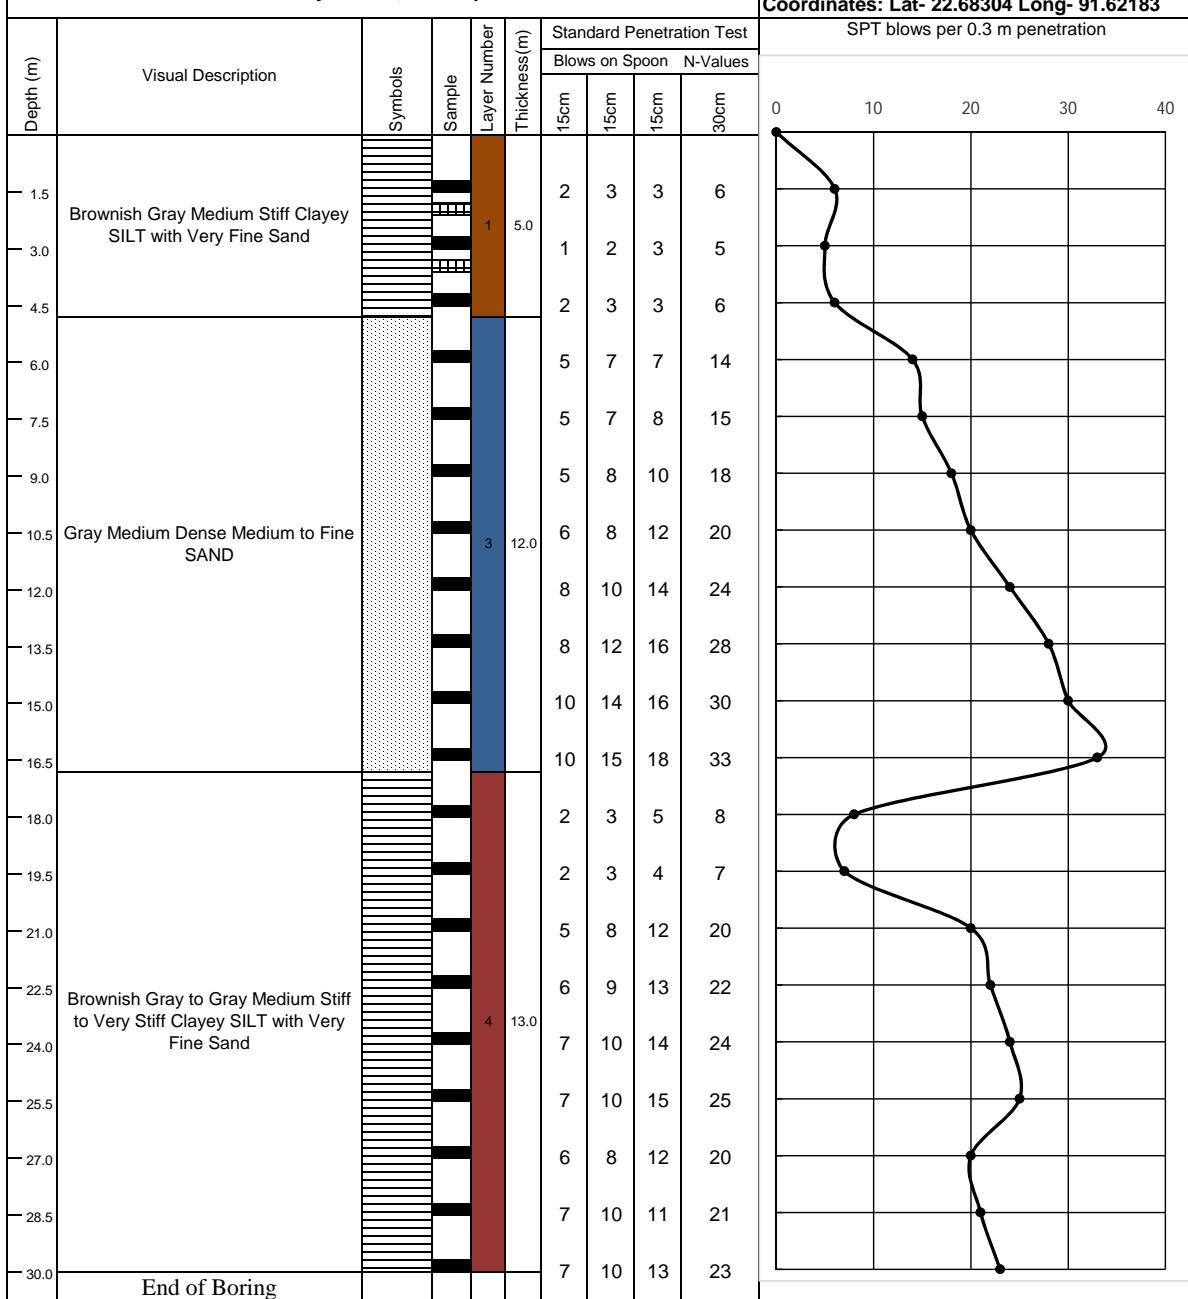

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M84 Method of Boring: Percussion Boring Dia.:100(mm) Boring Depth: 30.0m						Existing ground level: Ground water level: 4.00m below EGL Started on: 10.02.2018 Completed on: 10.02.2018			
Client :Urban Development Directorate (UDD) Project : Mirsharai Upazilla Development Plan Location : South Baliadi Govt. Primary School						Legend:  Clay Silt Sand			
Depth (m)	Visual Description	Symbols	Sample	Layer Number	Thickness(m)	Standard Penetration Test			
						Blows on Spoon	N-Values	Blows on Spoon	N-Values
						15cm	15cm	15cm	30cm
1.5						1	2	2	4
3.0	Brown to Gray Very Loose to Loose Very Fine to Fine SAND with Silt			2	8.0	1	2	3	5
4.5						2	2	3	5
6.0						2	3	3	6
7.5						2	3	5	8
9.0						3	6	9	15
10.5	Gray Medium Dense Medium to Fine SAND			3	6.0	4	6	8	14
12.0						5	8	10	18
13.5						6	8	12	20
15.0						2	2	3	5
16.5						2	2	2	4
18.0						2	2	3	5
19.5						2	3	3	6
21.0	Gray Medium Stiff to Very Stiff Clayey SILT with Very Fine Sand			4	16.0	5	7	12	19
22.5						6	8	12	20
24.0						3	5	7	12
25.5						3	5	8	13
27.0						4	6	9	15
28.5						6	7	8	15
30.0	End of Boring					5	6	7	13
Disturbed Sample(Split Spoon) Undisturbed Sample(Shelby Tube)									
Layer1       Layer5 Layer2       Layer6 Layer3       Layer7 Layer4       Layer8									



# Environmental & Geospatial Solutions (EGS)

## GEOTECHNICAL BOREHOLE LOG

Bore hole No: BH-M85

Method of Boring: Percussion

Boring Dia.:100(mm)

Boring Depth: 30.0m

Existing ground level:

Ground water level: 4.00m below EGL

Started on: 10.02.2018


Completed on: 10.02.2018

Client :Urban Development Directorate (UDD)

Project : Mirsharai Upazilla Development Plan

Location : Hait kandi High School

## Legend:




Clay

Silt

Sand

Coordinates: Lat- 22.71106 Long- 91.57895

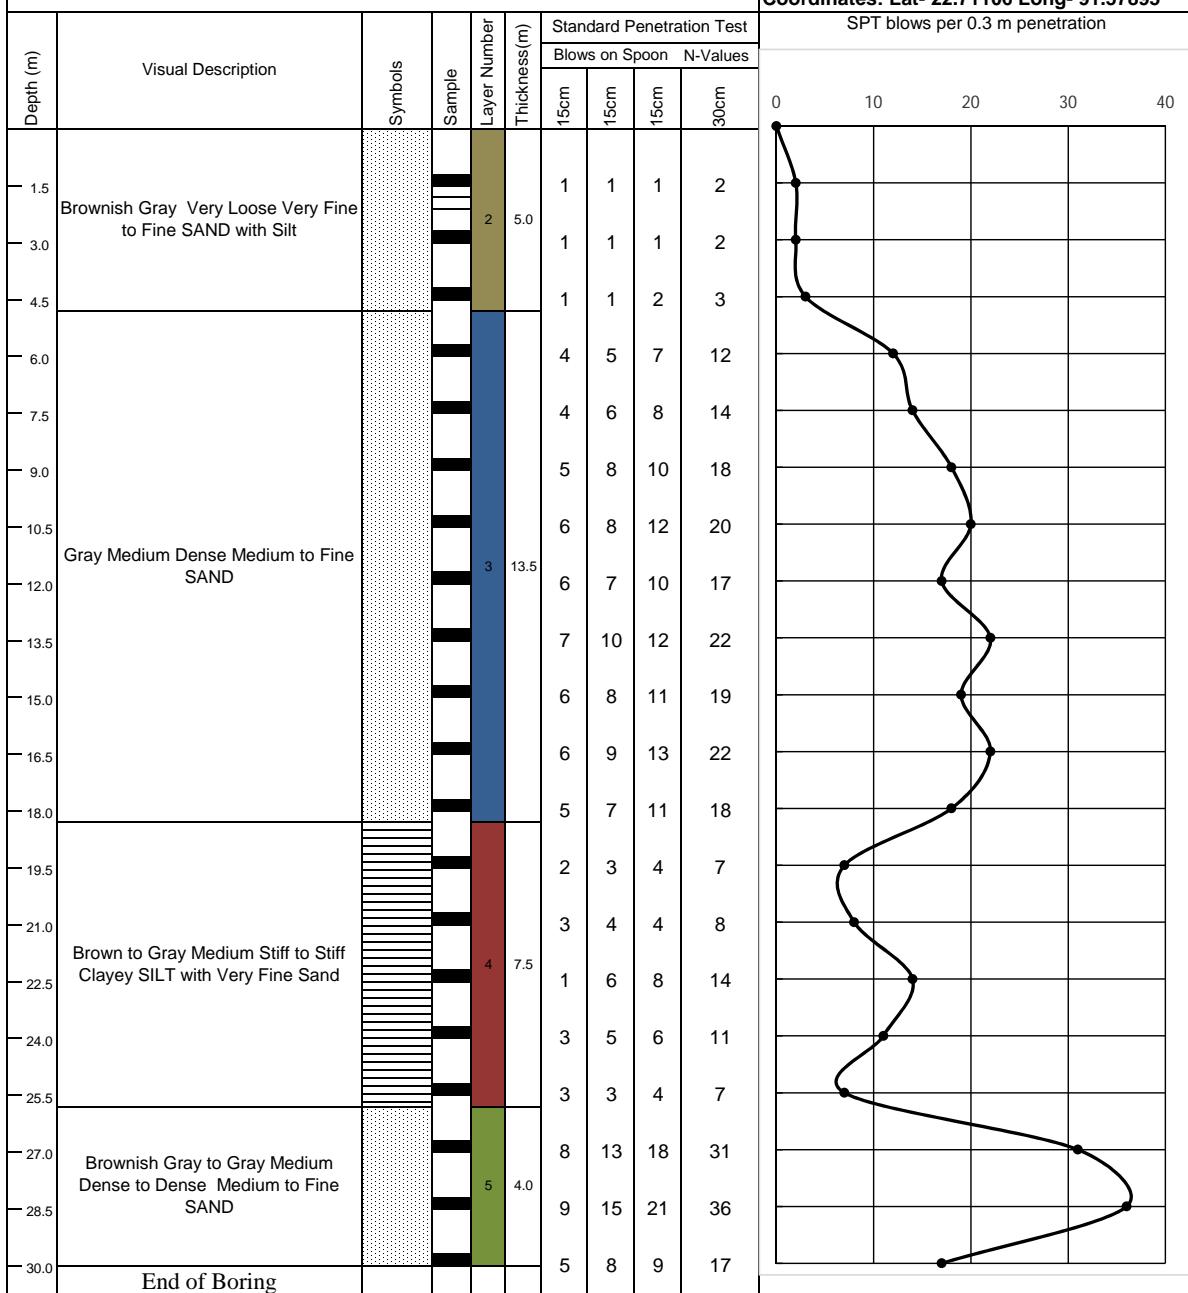

Disturbed Sample(Split Spoon)

Undisturbed Sample(Shelby Tube)

Layer1

Layer5

Layer2

Layer6

Layer3

Layer7

Layer4

Layer8